

# ASUS VA24DQSB

## 178° Ultra-wide View with Eye Care Monitor



Low Blue Light & Flicker Free

## Key Features



Frameless Design

Frameless, edge-to-edge design suitable for multi-display setup



IPS technology panel is optimized for the finest image and color quality with 178° wide-viewing-angle

**75 Hz**  
Refresh Rate

Decimating blurry to gain the upper hand in current video games



Exclusive GamePlus function provides the accurate and perfect gaming experience



Extensive connectivity with HDMI and DisplayPort ports for incredible home-theater entertainment




USB Hub

Satisfies every usage with built-in USB 2.0 hub and rich connectivity



Eye Care

TÜV Rheinland-certified ASUS Flicker-Free and Low Blue Light technologies



4-way Ergonomic Stand


With an ergonomically-designed stand with tilt, swivel, pivot, and height adjustments



Wall Mountable

Compatible with VESA wall-mount standard

# Specification
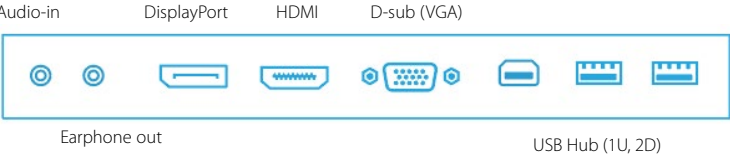
<b>Display</b>	Panel Size : Wide Screen 23.8-inch (60.45 cm) LED backlight, 16:9 Display Viewing Area (HxV) : 527.04 x 296.46 mm Panel Type : WLED / IPS True Resolution : Full HD 1920 x 1080 Pixel Pitch : 0.2745 mm Brightness(Max) : 250 cd/m <sup>2</sup> Contrast Ratio : 1,000:1 ASUS Smart Contrast Ratio (ASCR) : 100,000,000:1 Viewing Angle (CR $\geq$ 10) : 178°(H)/178°(V) Color Saturation : 72% NTSC Response Time : 5ms (Gray to Gray) Display Colors : 16.7M Flicker Free : Yes	
<b>Video Feature</b>	Blue Light Filter : Yes Trace Free Technology : Yes SPLENDID Video Intelligence Technology : Yes SPLENDID Video Preset Modes : 8 Modes (Standard / Scenery / Night View / Game / Theater / sRGB / Reading / Darkroom) Color Temperature Selection : 4 Modes (Cool / Normal / Warm / User) Skin-Tone Selection : 3 mode HDCP support : Yes Vivid Pixel Technology : Yes GamePlus : Yes (Crosshair / Timer / FPS Counter) QuickFit : 3 modes (Alignment Grid / Document / Photo) Adaptive-Sync : 48 – 75Hz	
<b>Audio Feature</b>	2W x 2 Stereo RMS	
<b>I/O Ports</b>	<b>Signal Input :</b> DisplayPort 1.2 x 1 HDMI(v1.4) x 1 D-sub x 1  <b>USB Hub:</b> USB2.0 Type-A x 2	<b>PC audio-in:</b> Yes, 3.5mm Mini-Jack  <b>Earphone Jack :</b> Yes, 3.5mm Mini-Jack
	 <p style="text-align: center;">Audio-in      DisplayPort      HDMI      D-sub (VGA)</p> <p style="text-align: center;">Earphone out      USB Hub (1U, 2D)</p>	
<b>Signal Frequency</b>	Analog Signal Frequency : 30~83 KHz (H) / 50~75 Hz (V) Digital Signal Frequency : 30~85 KHz (H) / 48~75 Hz (V)	
<b>Power Consumption</b>	Power on (Typical) : < 16.7W Power Saving Mode : < 0.3W Power Off Mode : < 0.3W Voltage : 100-240V, 50 / 60Hz	
<b>Mechanical Design</b>	Chassis Colors : Black Tilt : +35° ~ -5° Swivel : +180° ~ -180°	Pivot : 90° (Clockwise& Anticlockwise) Height Adjustment : 0 ~ 130 mm VESA Wall Mounting : 100 x 100 mm
<b>Security</b>	Kensington lock	
<b>Dimensions</b>	Phys. Dimension with Stand (WxHxD) : 540 x (350~480) x 211 mm Phys. Dimension without Stand (WxHxD) : 540 x 325 x 54 mm Box Dimension (WxHxD) : 634 x 450 x 228 mm	
<b>Weight</b>	Net Weight (Esti.) : 5.31 kg Net Weight without Stand (For VESA Wall Mount) (Esti.) : 3.21 kg Gross Weight (Esti.) : 6.8 kg	
<b>Accessories</b>	Power Cord, DisplayPort cable (optional), HDMI cable (optional), VGA cable (optional), Audio cable (optional), USB cable (optional), Warranty card, Quick Start Guide	
<b>Compliance Standard</b>	Energy Star®, FCC, cTUVus, ICES-3, CB, CE, ErP, WEEE, TUV-GS, TUV-Ergo, ISO 9241-307, UkrSEPRO, CU, CCC, CEL, BSMI, RCM, AU MEPS, VCCI, PSE, PC Recycle, J-MOSS, KC, KCC, e-Standby, TCO, WHQL Windows 7/10, TÜV Flicker Free, TÜV Low Blue Light	

\* measuring a screen brightness of 200 nits without audio / USB / Card reader connection

\*\*All specifications are subject to change without notice