


## OVERVIEW

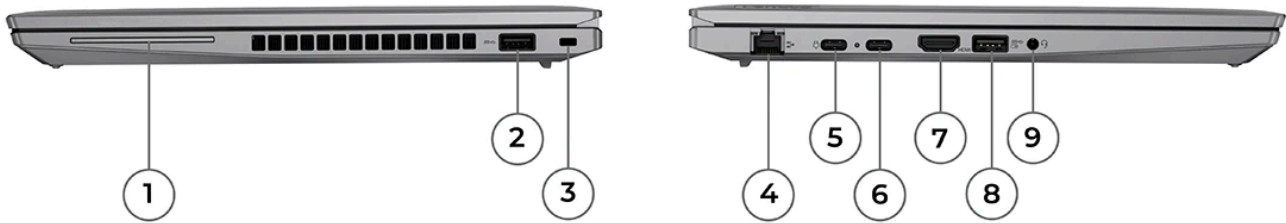

|                                  |  |
|----------------------------------|--|
| 1. Smart card reader *           | 6. USB-C 3.2 Gen 2                           |
| 2. USB 3.2 Gen 1                 | 7. HDMI                                      |
| 3. Kensington Nano Security Slot | 8. USB 3.2 Gen 1 (Always On)                 |
| 4. Ethernet (RJ-45)              | 9. Headphone / microphone combo jack (3.5mm) |
| 5. USB-C 3.2 Gen 2               |  |

Notes:

- Ports with \* are only available on selected models
- Optional nano-SIM card slot on the rear side (not shown on the sample product above)

## PERFORMANCE

### Processor

#### Processor Family

AMD Ryzen™ 5 / 7 Processor

#### Processor\*\*

| Processor Name        | Cores | Threads | Base Frequency | Max Frequency | Cache            | Memory Support | Processor Graphics        |
|-----------------------|-------|---------|----------------|---------------|------------------|----------------|---------------------------|
| AMD Ryzen 5 PRO 6650U | 6     | 12      | 2.9GHz         | 4.5GHz        | 3MB L2 / 16MB L3 | LPDDR5-6400    | AMD Radeon™ 660M Graphics |
| AMD Ryzen 7 PRO 6850U | 8     | 16      | 2.7GHz         | 4.7GHz        | 4MB L2 / 16MB L3 | LPDDR5-6400    | AMD Radeon 680M Graphics  |

### Operating System

#### Operating System\*\*

- Windows® 11 Pro 64
- Windows 11 Home 64
- Windows 11 DG Windows 10 Pro 64
- Linux
- Ubuntu Linux
- No operating system

### Graphics

#### Graphics\*\*

| Graphics        | Type       | Memory | Key Features |
|-----------------|------------|--------|--------------|
| AMD Radeon 660M | Integrated | Shared | DirectX® 12  |
| AMD Radeon 680M | Integrated | Shared | DirectX 12   |

### Monitor Support

#### Monitor Support

Supports up to 4 independent displays (native display and 3 external monitors via HDMI® and USB-C®)

- HDMI supports up to 4K@60Hz
- USB-C supports up to 4K@60Hz (4 displays output), 5K@60Hz (3 displays output) or 5K@120Hz (up to 2 displays output)

### Chipset

#### Chipset

AMD SoC (System on Chip) platform

### Memory

#### Max Memory<sup>[1]</sup>

- 8GB soldered memory, not upgradable
- 16GB soldered memory, not upgradable
- 32GB soldered memory, not upgradable

#### Memory Slots

Memory soldered to systemboard, no slots, dual-channel

#### Memory Type

LPDDR5-6400

#### Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

### Storage

#### Storage Support<sup>[1]</sup>

One drive, up to 2TB M.2 2280 SSD

#### Storage Slot

One M.2 2280 PCIe® Gen 4x4 slot, supports M.2 2242/2280 SSD

#### Storage Type\*\*

| Disk Type    | Interface                          | Offering            | Security |
|--------------|------------------------------------|---------------------|----------|
| M.2 2280 SSD | PCIe NVMe®, PCIe 4.0 x4            | 256GB / 512GB / 1TB | Opal2    |
| M.2 2280 SSD | PCIe NVMe, PCIe 4.0 x4 Performance | 512GB / 1TB / 2TB   | Opal2    |

#### Notes:

- The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.

## Removable Storage

#### Card Reader

No card reader

## Multi-Media

#### Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

#### Speakers

Stereo speakers, 2W x2, Dolby® Audio™

#### Microphone<sup>[1]</sup>

- Dual array microphone, far-field, Dolby Voice
- No microphone

#### Camera\*\*

- HD 720p, with privacy shutter, fixed focus
- FHD 1080p, with privacy shutter, fixed focus
- IR & FHD 1080p hybrid, with privacy shutter, fixed focus
- No camera

#### Notes:

- No microphone is for special bid only.

## Battery

#### Battery\*\*

- Integrated Li-Polymer 39.3Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter
- Integrated Li-Polymer 52.5Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter

#### Battery Life<sup>[1]</sup>

Configuration 1 (max battery life)

MobileMark® 2018: up to 14.6 hr with 595 performance score @200nits

MobileMark 25: up to 13.5 hr with 513 performance score @250nits

JEITA 2.0: up to 21.1 hr @150nits

Local video playback: up to 18.1 hr @150nits

Alternate configuration 2

MobileMark 2018: up to 13.3 hr with 694 performance score @200nits

MobileMark 25: up to 12.6 hr with 548 performance score @250nits

JEITA 2.0: up to 16.5 hr @150nits

Local video playback: up to 14.8 hr @150nits

Alternate configuration 3

MobileMark 2018: up to 10.1 hr with 662 performance score @200nits

MobileMark 25: up to 6.0 hr with 541 performance score @250nits

JEITA 2.0: up to 13.2 hr @150nits

Local video playback: up to 10.4 hr @150nits

#### Notes:

# ThinkPad T14 Gen 3 (AMD)

- Configuration 1 (max battery life): WUXGA Low Power (non-touch), AMD Ryzen 7 PRO 6850U, 16GB LPDDR5, Win 11, 52.5Wh battery, best power efficiency power mode  
Alternate configuration 2: WUXGA 300nits (touch), AMD Ryzen 5 PRO 6650U, 16GB LPDDR5, Win 11, 52.5Wh battery, best power efficiency power mode  
Alternate configuration 3: WQUXGA (touch), AMD Ryzen 5 PRO 6650U, 32GB LPDDR5, Win 11, 52.5Wh battery, best power efficiency power mode

All battery life claims are approximate maximum and based on results using [MobileMark 2018](#), [MobileMark 25](#), JEITA 2.0, continuous 1080p local video playback (using default Media Player in Fullscreen mode with 150nits brightness and default volume level), or Google Power Load Test (PLT) battery-life benchmark tests.  
Actual battery life will vary and depends on many factors such as product configuration, software, wireless functionality, power management settings, and screen brightness.  
The maximum capacity of the battery will decrease with time, ambient temperature and use.  
Refer to [Microsoft® link](#) for more information about the Windows Performance power slider.

## Power Adapter

### Power Adapter\*\*[1][2]

- 45W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 45W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- No power adapter

#### Notes:

- AC adapter offerings depend on the country.
- No power adapter is for special bid only.

## DESIGN

### Display

#### Display\*\*[1]

| Size  | Resolution         | Touch             | Type | Brightness | Surface                                  | Aspect Ratio | Contrast Ratio | Color Gamut | Viewing Angle | Key Features                                      |
|-------|--------------------|-------------------|------|------------|--|--------------|----------------|-------------|---------------|---|
| 14.0" | WUXGA (1920x1200)  | None              | IPS  | 300 nits   | Anti-glare                               | 16:10        | 700:1          | 45% NTSC    | 170°          | -   |
| 14.0" | WUXGA (1920x1200)  | None              | IPS  | 400 nits   | Anti-glare                               | 16:10        | 800:1          | 100% sRGB   | 170°          | Eyesafe® Certified                                |
| 14.0" | WUXGA (1920x1200)  | On-cell touch     | IPS  | 300 nits   | Anti-glare                               | 16:10        | 700:1          | 45% NTSC    | 170°          | -   |
| 14.0" | WUXGA (1920x1200)  | On-cell touch     | IPS  | 500 nits   | Anti-glare                               | 16:10        | 1000:1         | 100% sRGB   | 170°          | ThinkPad® Privacy Guard                           |
| 14.0" | 2.2K (2240x1400)   | None              | IPS  | 300 nits   | Anti-glare                               | 16:10        | 1500:1         | 100% sRGB   | 170°          | TÜV Low Blue Light                                |
| 14.0" | WQUXGA (3840x2400) | Add On Film Touch | IPS  | 500 nits   | Anti-glare, Anti-reflection, Anti-smudge | 16:10        | 1500:1         | 100% DCI-P3 | 170°          | Dolby Vision™, DisplayHDR™ 400, Eyesafe Certified |

#### Touchscreen\*\*

- Add-on Film Touch, supports 10-point touch
- On-cell touch, supports 10-point touch
- Non-touch

#### Notes:

- California Electronic Waste Recycling Fee  
In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product.  
For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

## Input Device

### Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls

### Keyboard Backlight

- LED backlight
- Non-backlight

### UltraNav™

TrackPoint® pointing device and glass-like Mylar® surface multi-touch touchpad, 61 x 115 mm (2.40 x 4.53 inches)

## Mechanical<sup>[1]</sup>

### Dimensions (WxDxH)

| Models                      | Dimensions  |
|-----------------------------|---|
| Model with storm grey cover | 317.7 x 227.36 x 17.9 mm (12.51 x 8.95 x 0.70 inches) |
| Model with black cover      | 317.7 x 226.9 x 17.9 mm (12.51 x 8.93 x 0.70 inches)  |

### Weight

| Models                    | Weight                    |
|---------------------------|---------------------------|
| Model with 39.3Wh battery | Around 1.21 kg (2.67 lbs) |
| Model with 52.5Wh battery | Around 1.32 kg (2.91 lbs) |

### Case Color\*\*

- Storm grey
- Thunder black

### Surface Treatment

Not anti-microbial surface treatment

### Case Material\*\*

- Thunder black models: PC 50% GF + PC 20% CF (top), PPS (bottom)
- Storm grey models: aluminium (top), PPS (bottom)

### Notes:

1. The system dimensions and weight vary depending on configurations.

## CONNECTIVITY

### Network

#### Onboard Ethernet\*\*

- Gigabit Ethernet, Realtek RTL8111HN (non-DASH models), 1x RJ-45, supports Wake-on-LAN
- Gigabit Ethernet, Realtek RTL8111EPV (DASH models), 1x RJ-45, supports Wake-on-LAN

#### WLAN + Bluetooth®\*\*<sup>[1][2]</sup>

- AMD RZ616, Wi-Fi® 6E, 802.11ax Dual Band 2x2 Wi-Fi + Bluetooth 5.2
- Qualcomm® NFA-725A Wi-Fi 6E, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2

#### WWAN\*\*

- Wireless WAN upgradable to 4G (with antenna ready)
- Integrated Mobile Broadband 4G LTE, Quectel EM05-G, CAT4, M.2 card
- Fibocom L860-GL-16, 4G LTE CAT16, M.2 card
- No support

#### SIM Card

- Gemalto eSIM
- No SIM card inbox

#### NFC

- Near Field Communication
- No support

# ThinkPad T14 Gen 3 (AMD)

## Notes:

1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitation
2. Wi-Fi 6E full features might be limited by country level restrictions.  
Wi-Fi 6E only enabled on Windows 11 and operates as Wi-Fi 6 with Windows 10.  
6GHz Wi-Fi 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi 6E, and the regional regulatory certifications & spectrum allocation.

## Ports<sup>[1]</sup>

### Standard Ports

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 2x USB-C 3.2 Gen 2 (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4a)
- 1x HDMI, up to 4K/60Hz
- 1x Ethernet (RJ-45)
- 1x Headphone / microphone combo jack (3.5mm)

### Optional Ports<sup>\*\*\*</sup>

- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)

## Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.  
USB 2.0: 480 Mbit/s;  
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;  
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;  
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;  
Thunderbolt™ 3/4: 40 Gbit/s

## Docking

### Docking

Various docking solutions supported via USB-C.

For more compatible docking solutions, please visit [Docking for ThinkPad T14 Gen 3 \(AMD\)](#)

## Monitor Cable

### Monitor Cable<sup>\*\*\*</sup>

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to DisplayPort Adapter
- Lenovo USB-C to VGA Adapter
- No monitor cable

## SECURITY & PRIVACY

## Security

### Security Chip

Discrete TPM 2.0, TCG certified, with Microsoft Pluton TPM 2.0 integrated in SoC

### Physical Locks

Kensington® Nano Security Slot, 2.5 x 6 mm

### Smart Card Reader

- Smart card reader
- No smart card reader

### Fingerprint Reader

- Touch style fingerprint reader on power button, match-on-chip
- No fingerprint reader

### BIOS Security

- Power-on password
- Supervisor password
- System management password
- NVMe password
- USB FIDO (Fast Identity Online) device integration

# ThinkPad T14 Gen 3 (AMD)

- Certificate based BIOS authentication
- Self-healing BIOS

## Other Security

- (Optional) Camera privacy shutter
- (Optional) IR camera for Windows Hello
- (Optional) Privacy Guard with Privacy Alert
- Mirametrix Glance

## MANAGEABILITY

### System Management

#### System Management

- DASH
- Non-DASH

## SERVICE

### Warranty

#### Base Warranty\*\*<sup>[1][2]</sup>

- 1-year depot service
- 1-year depot with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) depot service
- 3-year (1-yr battery) limited onsite service
- No base warranty

#### Notes:

1. More information of warranty policy, please access <https://pcsupport.lenovo.com/warranty>
2. No base warranty is for special bid only.

## ENVIRONMENTAL

### Sustainability

#### Material

97% PCC recycled plastic used in speaker enclosure

97% PCC recycled plastic used in the 52.5Wh battery; 25-30% in the 39.3Wh

95% PCC recycled plastic used in standard 65W adapter

Low-temperature solder

90% recycled and/or sustainable packaging

### Operating Environment

#### Temperature<sup>[1]</sup>

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

#### Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

#### Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

#### Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

## ACCESSORIES

## Bundled Accessories

### Bundled Accessories

- Lenovo USB-C to Ethernet Adapter
- None

## CERTIFICATIONS

### Green Certifications

#### Green Certifications

- EPEAT™ Gold
- ENERGY STAR® 8.0
- ErP Lot 3
- TCO Certified 9.0
- RoHS compliant

### Other Certifications

#### Mil-Spec Test

MIL-STD-810H military test passed

#### Other Certifications

- (Optional) Eyesafe Certified
- (Optional) TÜV Rheinland® Low Blue Light

- Feature with \*\* means that only one offering listed under the feature is configured on selected models.
- Feature with \*\*\* means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.





AMD



AMD



AMD



AMD



AMD



AMD