



SH753P

BenQ DLP Projector

- Big zoom ratio: 1.5x
- Suitable Throw Ratio: 1.39~2.09
- 5,000 ANSI Lumen High Brightness
- 13000:1 High Contrast Ratio
- Extron IP Link Certified


Display	
Projection System	DLP
DMD Type	DC3
Native Resolution	1080p (1920 x 1080)
Brightness	5,000 ANSI lumens
Contrast Ratio¹	13,000:1
Display Colour	30 Bits (1.07 billion colours)
Aspect Ratio	Native 16:9 (5 aspect ratio selectable)
Light Source²	Lamp (310W)
Light Source life³	2500/3500/4500 hr (Normal/Eco/SmartEco)
Optical	
Throw Ratio	1.39~2.09
Zoom Ratio	1.5x
Keystone Correction	2D, Vertical & horizontal ±30 degrees
Projection Offset	114.9% ± 3%
Projection Size	25.9"~324.9"
Lens shift	N/A
Audio	
Built-in Speaker	10W x1
Special Feature	
Security	Security bar, Kensington security slot
Features	2D Keystone, Corner Fit, LAN Control, FW upgrade via USB
Compatibility	
Resolution Support	VGA (640 x 480) to WUXGA_RB (1920 x 1200)
Horizontal Frequency	15K-102KHz
Vertical Scan Rate	23~120Hz
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility	NTSC, PAL, SECAM
Power	
Power Consumption(Max/Normal/Eco)	420W/365W/290W
Standby Power Consumption	Normal <0.5W
Power Supply	AC100 to 240V, 4.2A, 50 to 60 Hz
Dimension and Weight	
Product Dimensions (WxHxD)	314 x 117 x 233mm
Product Weight	3.3kg
Operation Condition	
Noise Level (Normal/Eco)	36/31 dBA
Operating Temperature	0 ~ 40°C
Accessories	
Accessories (Standard)	Power cord (by region) x1, Remote control with battery RCS011 x1, VGA cable x1, User manual CD x1, Quick start guide x1, Warranty card (by region) x1
Accessories (Optional)	Spare Lamp Kit (5J.JFG05.001), Ceiling mount (5J.JAM10.001), Carry bag, Wireless dongle QCast (QP30), InstaShow® WDC10/WDC30/VS20
OSD	
On Screen Display Language	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/Japanese/ Korean/Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/ Spanish/ Swedish/Turkish/ Thai/ TraditionalChinese (28 Languages)

¹ The Contrast is measured by Full On Full Off standard.


² Lamp in this product contains mercury. To dispose of the product or used lamps, consult your local environment authorities for regulations or see www.lamprecycle.org.

³ Lamp life results will vary depending on environmental conditions and usage.
Storage: Temperature: -20~60°C; Humidity: 10~90%RH (without condensation)

INPUT AND OUTPUT TERMINALS

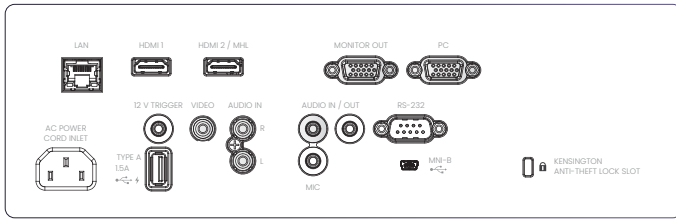


DIMENSIONS

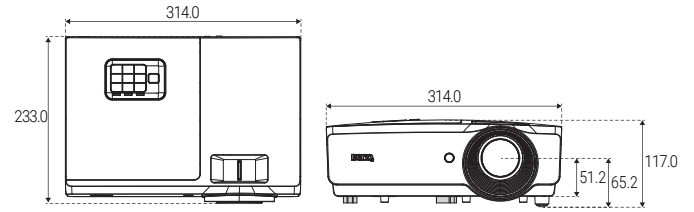


CEILING / WALL MOUNT INSTALLATION

Ceiling mount screw: M4 (Max. L = 25 mm; Min. L = 20 mm)

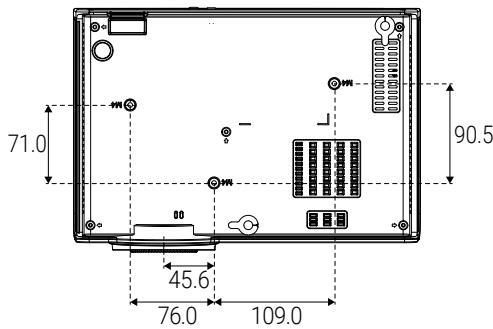

PROJECTION DIMENSIONS

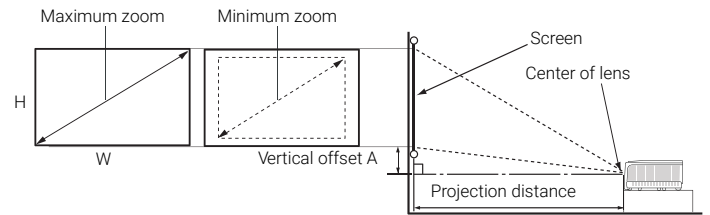

All units in mm

DISTANCE CHART

Screen size				Distance from screen (mm)			Offset (mm)
Diagonal	Width	Height	Min Distance	Average	Max Distance	A (mm)	
inch	mm	mm				Wide mode	
60	1524	1328	1846	2311	2776	111	
70	1778	1550	2154	2696	3239	130	
80	2032	1771	2462	3082	3701	149	
90	2286	1992	2769	3467	4164	167	
100	2540	2214	3077	3852	4627	186	
120	3048	2657	3693	4622	5552	223	
150	3810	3321	4616	5778	6940	279	
170	4318	3763	5231	6548	7866	316	
180	4572	3985	5539	6934	8328	334	
190	4826	4206	5847	7319	8791	353	
200	5080	4428	6154	7704	9254	371	
250	6350	5535	7693	9630	11567	464	
300	7620	6641	9232	11556	13881	557	



benq.eu/en-eu/business/projector.html

BenQ

© 2023 BenQ Corp. Specifications may vary by region, please visit your local stores for details. Actual product's features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.