

Robust 1-litre Slim PC for powerful Coffee Lake processors

The Shuttle XPC slim Barebone DH310V2 is a robust 1.3l Barebone PC with H310 chipset for Intel LGA1151v2 desktop processors, code-named "Coffee Lake (Refresh)". It allows for two Ultra HD displays to be operated at the same time via HDMI 2.0 and DisplayPort and offers Dual Intel LAN and COM ports. Its slim metal chassis comes with a VESA mount included, provides versatile connectivity and reliable operation in environments with ambient temperatures of up to 50 °C. This platform is targeted at professional applications such as Digital Signage, POS, POI, gambling machines, office, healthcare and industry.

Feature Highlights

Slim Design	• Slim 1.3-litre metal chassis, black • 190 x 165 x 43 mm (LWH) • Operating temperature: 0~50 °C • Including VESA mount (75/100 mm)
Operating System	• The operating system is not included • Supports Windows 10 and Linux (64-bit)
Processor	• Socket LGA 1151v2 supports Intel Core CPUs Gen. 8/9 "Coffee Lake", max. 65W TDP Core i9/i7/i5/i3, Pentium Gold, Celeron [9] • Including heatpipe cooling system
Chipset	• Intel H310 Chipset
Memory	• 2x 260-pin SO-DIMM slot • Supports DDR4-2400/2666, max. 2x 16 GB
Graphics	• Integrated Intel HD graphics, 4K support (features depend on processor) • Supports two independent displays
Storage	• 1x 2.5" bay for SATA hard disk or SSD
M.2 slots	• 1x M.2 2280M slot (PCIe x4, SATA) • 1x M.2 2230E for optional WLAN (WLN-M)
Connectors	• HDMI 2.0, DisplayPort 1.2, optional VGA • SD card reader, 2x audio (line out, mic) • 4x USB 3.0, 4x USB 2.0, 1x USB 2.0 onboard • 2x Intel Gigabit LAN (RJ45) • 2x COM port (RS232 + RS232/RS422/RS485) • Connector for external power button • "Always on" Jumper, DC-input 12 V or 19 V
Power Supply	• External 90W/19V power adapter (also supports 12 V power adapter)
Optional Accessories	• WLAN Module (WLN-M), Vertical Stand (PS02) • VGA Port (PVG01), Rackmount kit (PRM01) • Cable for external power button (CXP01)


XPC slim Barebone DH310V2



Images for illustration only.


Processor, memory, storage and operating system not included.

DH310 and **DH310V2** differ regarding the front panel design and chipset driver, but other features are the same.




Shuttle XPC slim Barebone DH310V2 – Front and Back Panel

Front view

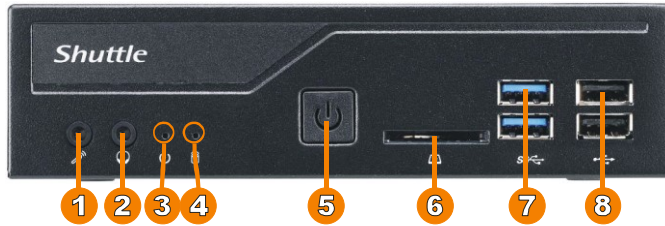

- 1 Microphone input
- 2 Headphones output
- 3 Power LED
- 4 Hard disk LED
- 5 Power Button
- 6 SD Card Reader
- 7 2x USB 3.0 (USB 3.1 Gen 1)
- 8 2x USB 2.0

Rear view

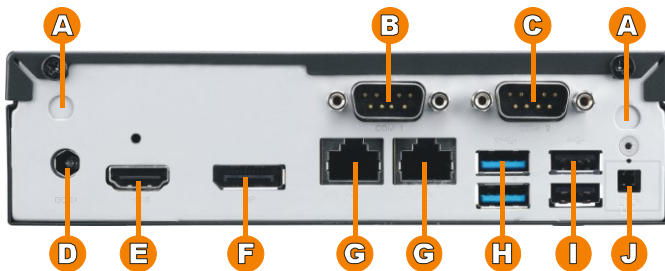

- A 2x WLAN perforation
- B COM1 supports RS232 (or optional VGA port for analog displays [5])
- C COM2 supports RS232/RS422/RS485
- D DC power input
- E HDMI 2.0 video output
- F DisplayPort (DP 1.2) video output
- G 2x RJ45 Gigabit LAN
- H 2x USB 3.0 (USB 3.1 Gen 1)
- I 2x USB 2.0
- J Connector for external power button, Clear CMOS and 5 V DC voltage (4-pin, 2.54 mm pitch)
- K 2x hole for Kensington Lock
- L VESA mount (two parts)

Right side



Left side



COM port Pin 9 Configuration

Pin 9 is a multi-functional signal. Based on jumper JP1 configuration on the mainboard, it can be configured as Ring Indicator (RI) or external power supply with either 5 V or 12 V voltage level (each COM port separately).

Shuttle XPC slim Barebone DH310V2 – Required Components

The following components need to be added to make it a fully-configured Mini PC

LGA1151v2 processor, Intel Core Gen 8/9
“Coffee Lake (Refresh)” TDP max. 65 W
Core i7 / i5 / i3, Pentium Gold or Celeron [9]




2.5" SATA hard disk
or Solid State Disk (SSD)
(max. height: 12.5 mm)

Windows 10 / Linux
Operating System



Optional:
M.2 2280/2260/2242
SSD storage
(SATA or PCIe)

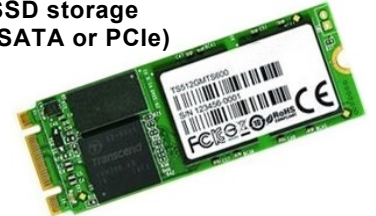

Up to two DDR4-2400/2666
SO-DIMM memory modules
max. 16 GB each



Optional Accessories

VGA port Accessory PVG01

Installing PVG01 means
one serial port (COM) less
can be used at the backpanel.



Vertical Stand PS02
for vertical operation



WLAN-Accessory WLN-M

M.2-2230 card supports
IEEE 802.11 b/g/n/ac
including 2 antennas

Rack Mount Kit PRM01

2U front plate to install two 1.3L
Shuttle XPCs in a 19" cabinet.



**Cable for external push
button switch CXP01**
(without button)



Connectivity / Applications

The Shuttle XPC slim Barebone DH310V2's wealth of ports makes it well-suited for a wide field of applications and external devices.



The DH310V2 is your powerful 1.3-litre Slim PC solution for particularly:


- Digital Signage with up to two displays simultaneously
- In-store Audio/Video entertainment
- Gambling
- Home-Media
- Office
- Call Centre
- Education
- Kiosk
- Point of Sales (POS)
- Medical
- Automation
- Small Server

Shuttle XPC slim Barebone DH310V2 – Product Features



Robust, stylish and particularly small

You should have held it in your own hands to see how small it actually is. At barely a volume of 1.35 litres, its steel chassis gives it the appropriate stability required for professional applications in digital signage. Despite its dimensions of 19 x 16.5 x 4.3 cm (LWH), the overall system performance is very high thanks to support of Intel Core desktop processors of the Coffee Lake generation. The interior of the DH310V2 is very tidy too so that it won't take long to set up. Its sleek and stylish looks let it easily find a place in both home and office environments.



Low noise thanks to heatpipe cooling system

An active dual-fan heatpipe cooling system ensures whisper-quiet operation and system stability.



Extended temperature range and reliability

The DH310V2 is outstandingly robust thanks to its rugged chassis. With an ambient temperature range from 0-50 °C it is suitable for use in the most demanding environments. Solely designed with all solid capacitors, the DH310V2 is guaranteed to deliver maximum stability, reliability and longer system lifetime for long-term applications like digital signage.


Caution: For high ambient temperatures over 40 °C we strongly recommend to use SSDs (supporting at least 70 °C).



Dual Display with HDMI 2.0 and DisplayPort (optional VGA)

The DH310V2 features two digital video outputs: HDMI 2.0 and DisplayPort (DP). Dual View technology offers multiple display support on up to two separate monitors. This helps improve on productivity by allowing for spreading multiple windows across two monitors while working with them simultaneously.

Furthermore, the DH310V2 supports an optional D-Sub/VGA port.



Supports 4K Ultra HD at 60 Hz

The DH310V2 supports two displays running at 4K (3840 x 2160 / 2160p) high resolution at 60 Hz frames per second. Being the successor to the Full HD standard, Ultra HD delivers a four times higher resolution with a wider colour space and colour depth.



One M.2-2280M-Slot for SSD card

The M.2-2280M slot supports one M.2 SSD storage card with NVMe PCIe or SATA interface.

Type 2280 means, it supports the usual M.2 cards with a width of 22 mm and a length of 80 mm, but also 2242 and 2260 standard cards are supported.



M.2-2230E-Slot for optional WLAN

The M.2-2230E slot is intended for Wireless LAN (Wifi), Bluetooth, GSM/UMTS cards and others.

Shuttle offers the optional accessory „WLN-M“ (see picture), which provides WLAN 802.11ac and Bluetooth 4.0 functionality.



VESA mount

The supplied 75/100mm VESA mount allows for installation on to walls or monitors which is particularly interesting for the industry segment, company buildings and public institutions. Other than this, the chassis bears numerous threaded holes (M3) enabling it to be fitted almost anywhere.



Kensington Lock

This is a small, metal-reinforced hole as part of an anti-theft system. The DH310V2 provides an appropriate hole on both sides of its chassis. The lock and cable are not included.



External power button by separate remote line


If, because of space constraints (e.g. in case of fixed installation), the machine cannot be switched on by pressing the front power button, it can be powered on by a separate remote line. You will find an appropriate four-pin connector at the back panel of the DH310V2 (pitch 2.54 mm). Furthermore, this connector provides a Clear CMOS function and +5V DC voltage supply for external devices.

+5V voltage (2)	● ●	(4) Power Button
Clear CMOS (1)	■ ●	(3) Ground

Power on after Power fail

The BIOS setup provides a "Power-On after Power Fail" function that can be found under "Power Management Configuration". As the name indicates, this function determines the PC's behaviour after power failure: (1) unconditional power on, (2) restore former status (3) keep system turned off (4) Power-On by LAN or (5) Power-On by Real-Time-Clock. As a matter of the nature of this function, it may fail after short power failures. This is why the DH310V2 also comes with a hardware-based solution. By removing Jumper JP2 (see image) the system will start unconditionally once power is applied.

- Front Panel -

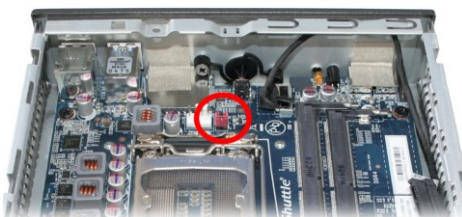

Product Comparison

	DH110SE	DH110	DH170	DH310S	DH310(V2)	DH370
Processor support	Socket LGA1151, TDP max. 65 W "Skylake" (Gen. 6) or "Kaby Lake" (Gen. 7)			Socket LGA1151v2, TDP max. 65 W "Coffee Lake (Refresh)" (Gen. 8 und 9) [9]		
Chipset	Intel H110	Intel H110	Intel H170	Intel H310	Intel H310	Intel H370
Operation system support	Windows 10 and Linux Windows 7/8.1 with "Skylake" CPU only			Windows 10 and Linux		
Multi-display	max. 2	max. 2	max. 3	max. 2	max. 2	max. 3
Max. memory (SO-DIMM)	2x 16 GB DDR4-2400	2x 16 GB DDR3L-1600		2x 16 GB DDR4-2400/2666		
2.5" bay	1x 2.5" SATA drive bay (max. height: 12.5 mm)					
M.2 SSD slot	M.2-2260M	M.2-2260M		M.2-2280M		
WLAN slot	M.2-2230AE	Mini-PCIe Half-Size		M.2-2230E		
Buttons / LEDs	Power Button, 2x LED (Power, HDD)			Power Button, 2x LED (Power, HDD)		
SD card reader	Yes			Yes		
Graphics-ports	HDMI 1.4b DP 1.2	HDMI 1.4b DP 1.2	HDMI 1.4b 2x DP 1.2	HDMI 1.4b DP 1.2	HDMI 2.0a DP 1.2	HDMI 2.0a 2x DP 1.2
USB 3.1 Gen. 2	–	–	–	–	–	4
USB 3.1 Gen. 1	2	4		4 (1x Type-C)	4	4
USB 2.0	6	3		4	4	–
PS/2 combo	–	1	–	–	–	–
COM ports	–	2	2	–	2	2
Gigabit network	Single LAN Realtek 8111G	Dual LAN Intel 211/219LM		Single LAN Realtek 8111H	Dual LAN 2x Intel 211	
Audio	Realtek ALC662, Mic-Input, Line-Out			Realtek ALC662, Mic-Input, Line-Out		
Optional Accessories [1]	WLAN: WLN-M Stand: PS02 Rack: PRM01 Cable: CXP01 VESA: PV04	WLAN: WLN-P Stand: PS02 Rack: PRM01 VGA: PVG01 Cable: CXP01	WLAN: WLN-P Stand: PS02 Rack: PRM01 VGA: PVG01 Cable: CXP01	WLAN: WLN-M Stand: PS02 Rack: PRM01 VGA: PVG01 Cable: CXP01 VESA: PV04	WLAN: WLN-M Stand: PS02 Rack: PRM01 VGA: PVG01 Cable: CXP01	WLAN: WLN-M Stand: PS02 Rack: PRM01 VGA: PVG01 Cable: CXP01
VESA mount	optional	supplied	supplied	optional	supplied	supplied
19 V power adp.	90 W / 19 V			90 W / 19 V		
12 V support?	No	Yes	No	No	Yes	No

[1] **WLAN:** WLAN card with two external antenna, **Stand:** two feet for vertical operation, **Rack:** 2U rack mount kit to install two Slim-PCs in a 19" server rack, **Cable:** 2-meter cable to connect an external power button, **VESA:** VESA mounting kit, **VGA:** D-sub adapter to connect an analog VGA monitor

DH310S



DH310V2



DH370



DH310



DH310V2



Note: DH310 and DH310V2 differ regarding the front panel design and chipset driver, but other features are the same.

Shuttle XPC cube slim DH310V2 - Specifications

Chassis	Slim PC with black chassis made of metal Dimensions: 190 x 165 x 43 mm (LWH) = 1.35-litre Weight: 1.3 kg net and 2.1 kg gross Two holes for Kensington Locks and numerous threaded holes (M3) at both sides of the chassis
Power Adapter	External 90 W power adapter (fanless) Input: 100~240 V AC, 50/60 Hz Output: 19 V DC, 4.74 A, max. 90 W DC Connector: 5.5/2.5 mm (outer/inner diameter) Remark: the DC-input of the computer supports an external power source with either 12V±5% or 19V±5%.
Operation System	This system comes without operating system. It is compatible with Windows 10 and Linux (64-bit)
Processor Support	Processor Socket LGA 1151v2 Supports Intel Core i9 / i7 / i5 / i3, Pentium and Celeron processors Supports the 8th and 9th generation Intel Core processors, codename "Coffee Lake (Refresh)" in 14+ nm process technology Supports processors with integrated graphics only [9] Maximum supported processor power consumption (TDP) = 65 W Up to 8 CPU cores, 16 threads and 16 MB of L3 cache Does not support the unlock-function of Intel K-Series processors. <u>Not compatible</u> with older Socket LGA 1151 processors (6th Gen. "Skylake" and 7th Gen. "Kaby Lake"). The processor integrates PCI-Express, memory controller and the graphics engine on the same die (performance features depending on processor type) Please refer to the support list for detailed processor support information at global.shuttle.com.
Processor Cooling	Heatpipe processor cooling with two 60 mm fans on the upper side of the chassis
Mainboard & Chipset	Shuttle mainboard FS310, Shuttle form factor, proprietary design for XPC DH310V2 Chipset/Southbridge: Intel® H310 Passive chipset cooling with heat sink The Northbridge is integrated in the processor. Solid Capacitors for sensitive areas provide excellent heat resistance for enhanced system durability

<i>BIOS</i>	AMI BIOS, SPI Interface, 16 MB Flash-EPROM Supports Hardware Monitoring and watch dog functionality Supports Firmware-TPM (fTPM) v2.0 Supports boot up from external USB flash memory Supports Unified Extensible Firmware Interface (UEFI) Supports power on after power failure [7]
<i>Memory Support</i>	2x SO-DIMM slot with 260 pins Supports DDR4-2400/2666 (PC4-19200/21300) SDRAM at 1.2 V Supports Dual Channel mode Supports a maximum of 16 GB per DIMM, maximum total size: 32 GB Supports two unbuffered DIMM modules (no ECC or registered)
<i>Integrated graphics</i>	The features of the integrated Intel UHD graphics function depend on the processor type used. Supports DirectX 12, OpenGL 4.5 The PC features two video outputs which support 1080p/60 and 2160p/60: - 1x HDMI v2.0 - 1x DisplayPort v1.2 Supports displays with 4K Ultra HD resolution at 3840 x 2160 Supports two independent displays with the integrated graphics function Supports Blu-ray (BD) playback with HDCP content protection [1] Hardware video decoding/encoding: H.264, H. 265 (8- and 10-bit, encoding via QuickSync), VP9 (10-bit VP9 can only be decoded) DisplayPort and HDMI support multi-channel digital audio over the same cable. Optional analog D-Sub/VGA video output [4]
<i>Storage Bay</i>	1x 6.35 cm / 2.5" storage bay supports one hard disk or SSD drive with SATA connector Device height: 12.5 mm (max.)
<i>SATA Connector</i>	1x Serial-ATA III, 6 Gb/s (600 MB/s) bandwidth With Serial-ATA power connector (onboard)
<i>M.2-2280M SSD Slot</i>	The M.2 2280M slot provides the following interfaces: - PCI-Express Gen. 2.0 X4, supports NVMe - SATA v3.0 (max. 6 Gbps) It supports M.2 cards with a width of 22 mm and a length of 42, 60 or 80 mm (type 2242, 2260, 2280). Supports M.2 SSDs with SATA or PCI-Express interface
<i>M.2-2230E Slot</i>	M.2-2230E slot for WLAN cards Interfaces: PCI-Express Gen. 2.0 X1 und USB 2.0 Supports M.2 cards with a width of 22 mm and a length of 30 mm (type 2230) Supports WLAN extension cards (optional Shuttle accessory: WLN-M)

<i>Audio</i>	Audio Realtek® ALC 662 5.1 channel High-Definition Audio Two analog audio connectors (3.5 mm) at the front panel: 1) 2-channel line-out (headphones) 2) microphone input Digital multi-channel audio output: by HDMI and DisplayPort
<i>Dual Gigabit-LAN Controller</i>	Dual network with two RJ45 ports Used network chips: 2x Intel i211 Ethernet Controller with MAC, PHY and PCIe interface Supports 10 / 100 / 1.000 MBit/s operation Supports WAKE ON LAN (WOL) Supports network boot by Preboot eXecution Environment (PXE) Supports Teaming mode [5]
<i>Card Reader</i>	Integrated card reader Supports SD, SDHC and SDXC up to v3.01 memory flash cards Supports boot up from SD card
<i>Front panel Connectors and Buttons</i>	Microphone input Audio Line-out (headphones) 2x USB 3.0 (= USB 3.1 Gen 1) 2x USB 2.0 SD card reader Power button Power LED (blue) HDD LED (yellow)
<i>Back Panel Connectors</i>	1x HDMI 2.0 connector [1] 1x DisplayPort 1.2 connector (DP) [2] Optional: 1x D-Sub VGA connector (Accessory PVG01 [4]) 2x USB 3.0 (= USB 3.1 Gen 1) 2x USB 2.0 2x Gigabit LAN (RJ45) 2x RS232 serial port, 9-pin D-Sub (5/12V, 1x RS422/RS485) [3] 1x DC-input connector for external power adapter (supports 12V±5% or 19V±5%) 1x 4-pin connector (2.54 mm pitch) supports: - external power on button - Clear CMOS function - +5V DC voltage for external components 2x Perforation for optional Wireless LAN antennas 2x hole for Kensington Locks
<i>Other Connectors (onboard)</i>	1x jumper for power-on-after-power-fail (hardware solution) [7] 1x analog VGA graphics output CN6 (2x 1-pin, 1 mm pitch) [4] 2x serial interface (COM) occupied by back panel connectors 1x USB 2.0 (4-pin) 1x fan connector (4-pin) occupied by the cooling system 1x connector for CMOS battery (occupied)

<i>Supplied Accessories</i>	Multi-language user guide (EN, DE, FR, ES, JP, KR, SC, TC) VESA mount for 75/100 mm standard (two metal brackets) Four screws M3 x 5 mm (screws together VESA mount and PC) Four screws M4 x 10 mm (to affix VESA mount on the PC) Four screws M3 x 4 mm (to mount a 2.5" storage device into the bay) Two screws M3 x 5 mm (silver colour, to mount two M.2 cards) Driver DVD (Windows 64-bit) Serial ATA cable for 2.5" drive including power cable External 90 W power adapter with power cord Protection cap for CPU socket (do not use if heatpipe or fan is mounted) Heatsink compound
<i>Optional Accessories</i>	PVG01: optional D-Sub VGA video output [4] WLN-M: WLAN module in M.2-2230 format with two external antennas supports IEEE 802.11ac and Bluetooth 4.0 PS02: Stand for vertical operation CXP01: adapter cable for external power button PRM01: 2U rack mount front plate for two Shuttle XPC slim PCs
<i>Environmental Spec</i>	Operating temperature range: 0~50 °C [6] Relative humidity, non-condensing: 10~90 %
<i>Certifications Compliance</i>	EMI: FCC, CE, BSMI, RCM, VCCI Safety: ETL, CB, BSMI Other: RoHS, Energy Star, ErP
<i>Conformity</i>	This device is classed as a technical information equipment (ITE) in class B and is intended for use in living room and office. The CE-mark approves the conformity by the EU directives: (1) 2004/108/EC relating to electromagnetic compatibility (EMC), (2) 2006/95/EC relating to Electrical Equipment designed for use within certain voltage limits (LVD), (3) 2009/125/EC relating to ecodesign requirements for energy-related products (ErP)

Power Consumption:

System configuration: Shuttle XPC slim Barebone DH310V2, BIOS version 1.01, Processor: Intel Core i5-8500 (65W), RAM: 2x 4 GB DDR4, SSD: 128 GB Intel 760P NVMe (M.2-2280), Operating system: Windows 10 18.03 64-bit.

Idle mode:	11.4 W
Full load (CPU only):	84.5 W
Full load (CPU+Graphics):	94.7 W
ACPI mode S3 (Standby):	1.28 W
ACPI mode S5 (EUP=ON):	0.24 W
ACPI mode S5 (EUP=OFF):	0.68 W

Note: The power adapter is designed for max. 90 Watts output wattage. Assuming an efficiency of 90%, the measured power consumption on the primary side (AC power connector) can be up to 100 Watts without the risk of overloading.

Notes:

[1] **HDMI output** supports DVI-D with optional adapter

[2] **How to convert DisplayPort into HDMI/DVI**

The DisplayPort output can be converted to HDMI or DVI by an additional, passive adapter cable. For example:

DELOCK 82590: 1 m, DisplayPort (male, 20p) to HDMI-A (male, 19p)

DELOCK 82435: 5 m, DisplayPort (male, 20p) to DVI-D (male, 24p)

The integrated graphics automatically detects the connected display and puts out the appropriate electric signal - either through DisplayPort (without an adapter) or HDMI/DVI (with an adapter).

However, a monitor with a DisplayPort connector cannot be connected to the HDMI port with a simple, passive adapter.

[3] **Serial Ports**

This PC features two serial RS232 ports with 9-pin D-Sub connectors at the back panel. The left COM port (COM1) can also be configured as RS422 and RS485 in BIOS. The COM ports are protected by black plastic caps.

Pin 9 of the D-Sub COM-Port is a multi-functional signal. Based on the Jumper JP1 configuration on the mainboard, it can be configured as Ring Indicator (RI) or external power supply with a voltage level of either 5 V or 12 V. Each COM port can be configured separately. The maximum current is 500 mA per connector.

[4] **Optional D-Sub/VGA connector**

The mainboard features one analog graphics port CN6 on the mainboard. This signal can be lead to the outside as a 15-pin D-Sub VGA connector at the backpanel by using the optional adapter PVG01. However doing so means one serial port (COM) less can be used at the backpanel.

[5] **Teaming Mode**

The teaming function allows you to group both available network adapters together to function as a single adapter. The benefit of this approach is that it enables load balancing and failover.

Driver download: https://downloadmirror.intel.com/22283/eng/23_2.zip

[6] **Operating temperature**

For high ambient temperatures over 40 °C we strongly recommend to use SSDs (supporting at least 70 °C) and rugged SO-DIMM memory modules with a temperature range of up to 95 °C.

[7] **Power on after power fail**

The BIOS setup provides a "Power-On after Power Fail" function that can be found under "Power Management Configuration". As the name indicates, this function determines the PC's behaviour after power failure: (1) unconditional power on, (2) restore former status or (3) keep system turned off. As a matter of the nature of this function, it may fail after short power failures. This is why the DH310V2 also comes with a hardware-based solution. By removing Jumper JP2 (on the mainboard behind the power button) the system will start unconditionally once power is supplied.

[8] **DH310 and DH310V2** differ regarding the front panel design and chipset driver, but other features are the same.

[9] **Important notes regarding 9th generation processors**

The 9th generation of Intel Core desktop processors (9000 series with code name "Coffee Lake Refresh") are supported since BIOS version DH310200.101 (date 2019-03-22). Download area: global.shuttle.com

Please don't use processors with model numbers ending with "F" (e.g. Intel Core i5-9400F) which do not support integrated graphics.

8th Generation Intel Core Desktop Processor Family

Socket LGA1151v2 14 nm++ "Coffee Lake S" processor overview (Date: May 2018)

Processors with a TDP>65W are **not** supported (marked in red)

Name	Model	Cores/ Threads	CPU Clock	Turbo Clock	Smart Cache	TDP	Memory Support	Graphics Engine (clock in MHz)
Core i7	8700K	6 / 12	3.7 GHz	4.7 GHz	12 MB	95 W	DDR4-2666	UHD 630, 350-1200 MHz
	8700	6 / 12	3.2 GHz	4.6 GHz	12 MB	65 W	DDR4-2666	UHD 630, 350-1200 MHz
	8700T	6 / 12	2.4 GHz	4.0 GHz	12 MB	35 W	DDR4-2666	UHD 630, 350-1200 MHz
Core i5	8600K	6 / 6	3.6 GHz	4.3 GHz	9 MB	95 W	DDR4-2666	UHD 630, 350-1150 MHz
	8600	6 / 6	3.1 GHz	4.3 GHz	9 MB	65 W	DDR4-2666	UHD 630, 350-1150 MHz
	8600T	6 / 6	2.3 GHz	3.7 GHz	9 MB	35 W	DDR4-2666	UHD 630, 350-1150 MHz
	8500	6 / 6	3.0 GHz	4.1 GHz	9 MB	65 W	DDR4-2666	UHD 630, 350-1100 MHz
	8500T	6 / 6	2.1 GHz	3.5 GHz	9 MB	35 W	DDR4-2666	UHD 630, 350-1100 MHz
	8400	6 / 6	2.8 GHz	4.0 GHz	9 MB	65 W	DDR4-2666	UHD 630, 350-1050 MHz
	8400B	6 / 6	2.8 GHz	4.0 GHz	9 MB	65 W	DDR4-2666	UHD 630, 350-1050 MHz
	8400T	6 / 6	1.7 GHz	3.3 GHz	9 MB	35 W	DDR4-2666	UHD 630, 350-1050 MHz
Core i3	8350K	4 / 4	4.0 GHz	–	8 MB	91 W	DDR4-2400	UHD 630, 350-1150 MHz
	8300	4 / 4	3.7 GHz	–	8 MB	62 W	DDR4-2400	UHD 630, 350-1150 MHz
	8300T	4 / 4	3.2 GHz	–	8 MB	35 W	DDR4-2400	UHD 630, 350-1150 MHz
	8100	4 / 4	3.6 GHz	–	6 MB	65 W	DDR4-2400	UHD 630, 350-1100 MHz
	8100T	4 / 4	3.1 GHz	–	6 MB	35 W	DDR4-2400	UHD 630, 350-1100 MHz
Pentium Gold	G5600	2 / 4	3.9 GHz	–	4 MB	51 W	DDR4-2400	UHD 630, 350-1100 MHz
	G5500	2 / 4	3.8 GHz	–	4 MB	51 W	DDR4-2400	UHD 630, 350-1100 MHz
	G5500T	2 / 4	3.2 GHz	–	4 MB	35 W	DDR4-2400	UHD 630, 350-1100 MHz
	G5400	2 / 4	3.7 GHz	–	4 MB	51 W	DDR4-2400	UHD 630, 350-1050 MHz
	G5400T	2 / 4	3.1 GHz	–	4 MB	35 W	DDR4-2400	UHD 630, 350-1050 MHz
Celeron	G4920	2 / 2	3.2 GHz	–	2 MB	54 W	DDR4-2400	UHD 610, 350-1050 MHz
	G4900	2 / 2	3.1 GHz	–	2 MB	54 W	DDR4-2400	UHD 610, 350-1050 MHz
	G4900T	2 / 2	2.9 GHz	–	2 MB	35 W	DDR4-2400	UHD 610, 350-1050 MHz

K = unlocked: einstellbarer Takt-Multiplikator, T = stromsparend, TDP = Thermal Design Power (max. Verlustleistung)

Hinweis: Das Shuttle XPC slim Barebone DH310V2 unterstützt nicht die Unlock-Funktion von Intel Prozessoren der K-Serie
Detaillierte Informationen über kompatible Prozessoren finden Sie in der Support-Liste unter global.shuttle.com.

9th Generation Intel Core Desktop Processor Family

Socket LGA1151v2 14 nm++ "Coffee Lake S" processor overview (Date: May 2018)
Processors with a TDP>65W and processors without graphics function (ID ends with "F")
are not supported (marked in red)

The 9th generation of Intel Core Prozessors
are supported since BIOS version DH310200.101 (date 2019-03-22).
Download area: global.shuttle.com

Name	Model	Cores/ Threads	CPU Clock	Turbo Clock	Smart Cache	TDP	Memory Support	Graphics Engine (clock in MHz)
Core i9	9900K	8 / 16	3.6 GHz	5.0 GHz	16 MB	95 W	DDR4-2666	UHD 630, 350-1200 MHz
	9900KF	8 / 16	3.6 GHz	5.0 GHz	16 MB	95 W	DDR4-2666	No integrated graphics
	9900	8 / 16	3.1 GHz	5.0 GHz	16 MB	65 W	DDR4-2666	UHD 630, 350-1200 MHz
	9900T	8 / 16	2.1 GHz	4.4 GHz	16 MB	35 W	DDR4-2666	UHD 630, 350-1200 MHz
Core i7	9700K	8 / 8	3.6 GHz	4.9 GHz	12 MB	95 W	DDR4-2666	UHD 630, 350-1200 MHz
	9700KF	8 / 8	3.6 GHz	4.9 GHz	12 MB	95 W	DDR4-2666	No integrated graphics
	9700	8 / 8	3.0 GHz	4.7 GHz	12 MB	65 W	DDR4-2666	UHD 630, 350-1200 MHz
	9700T	8 / 8	2.0 GHz	4.3 GHz	12 MB	35 W	DDR4-2666	UHD 630, 350-1200 MHz
Core i5	9600K	6 / 6	3.7 GHz	4.6 GHz	9 MB	95 W	DDR4-2666	UHD 630, 350-1150 MHz
	9600KF	6 / 6	3.7 GHz	4.6 GHz	9 MB	95 W	DDR4-2666	No integrated graphics
	9400	6 / 6	2.9 GHz	4.1 GHz	9 MB	65 W	DDR4-2666	UHD 630, 350-1050 MHz
	9400F	6 / 6	2.9 GHz	4.1 GHz	9 MB	65 W	DDR4-2666	No integrated graphics
	9400T	6 / 6	1.8 GHz	3.4 GHz	9 MB	35 W	DDR4-2666	UHD 630, 350-1050 MHz
Core i3	9350KF	4 / 4	4.0 GHz	4.6 GHz	8 MB	91 W	DDR4-2400	No integrated graphics

K = unlocked, **T** = Power optimized lifestyle, **F** = without integrated graphics

TDP = Thermal Design Power (max. Power Consumption).

Note: The Shuttle XPC slim Barebone DH310V2 does not support the Unlock-function of Intel K-Series processors.
Please refer to the support list for detailed processor support information at global.shuttle.com.