


Data sheet

BenQ SL6504

Digital Signage Display

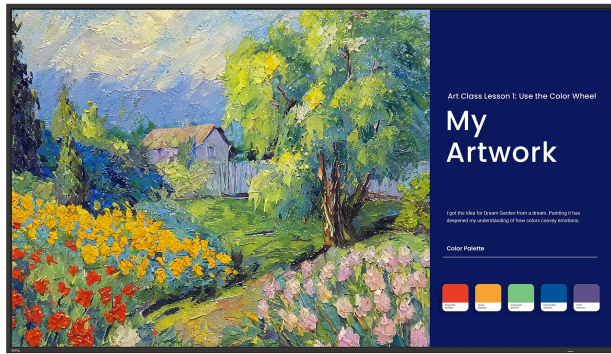

- Android 13, Google EDLA
- X-Sign 3.0
- AMS / DMS
- World's 1st Digital Signage with Pantone Validated® and Pantone® SkinTone™ Validated



Panel

Model : SL6504
Art. Nr. / EAN Code : 9H.S3MTB.DE2 / 471 8755 09566 5

Type: 165,1 cm / 65" Wide TFT

Physical resolution : 3.840 x 2.160 4K / 16:9

Active display area B x H : 1.428,5 × 803,5 mm

Panel / pixel pitch: 10 Bit / 0,25 x 0,25 mm

Surface : Haze 25%

Color Gamut : sRGB 99%, 72% NTSC

Backlight : Direct LED, 50,000 hrs. (typical)

Brighthness : 500 cd/m2

Contrast : 1.200:1 (typ.)

Reaction time : 8 ms

Inputs connections

Video : HDMI (2.0) 2x

USB : 2 × USB 3.2 Gen 1 × 1 (x 1 für OTG)

Audio

Integrated speakers: 12W x 2

Extras

Software : X-Sign Broadcast, X-Sign 3.0, DMS Cloud/Local, InstaShare 2

System / Storage Capacity: Android 13.0 / 64 GB Storage, 8 GB RAM

Bracket hole spacing: 400 x 400 mm, 4x M6 x 12L

Orientation : Landscape / portrait format

Operating time hours / days: 24 / 7

Energy

Power adapter: Internal power supply

Operating voltage: 110 ~ 240 VAC ; 50 / 60 Hz

Power consumption (typical): 110,3 W

Power saving mode / standby: < 0,5 W

BenQ SL6504

Certifications

Security : CE, EnergyStar 8.0

Umgebung

Operation : 0 ~ +40°C ; 10 ~ 80% humidity

Storage conditions -10 ~ +60°C ; 20 ~ 90% humidity

Attributes

Weight : 20,7 kg (netto) / 28,7kg (brutto)

Frame width : 12,5 mm (links / oben) ; 12,5 mm (right / under)

Size (B x H x T) : 1.456,4 x 833,7 x 57 mm

Included accessories: Remote control, power cable (1,8 m), HDMI cable (1,5 m), Quickstart Guide, Operating instructions (online)

Warranty and service: 3 years on-site replacement service

Dimensions

