
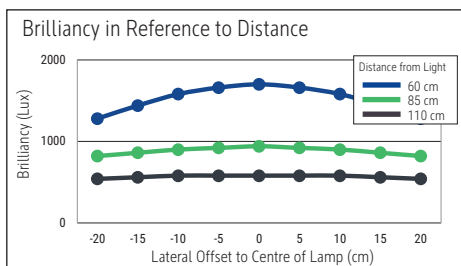



LED floor lamp MAULsenja colour vario sensor, dimmable

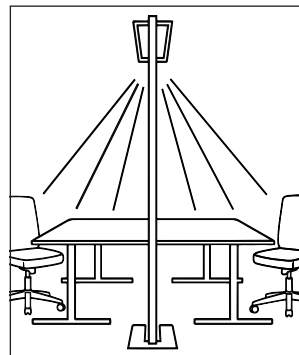

- **High-performance aluminum designer light fixture with modern lighting management**
- **Constant light control via motion and daylight sensors**
- **Color temperature and illuminance (dimmer) continuously adjustable**
- **For dual workstations & Lighting across the entire tabletop thanks to an extra-large lamp head**
- **Separate control: Direct light for the work surface and indirect light for room illumination, with 80% light directed upward and 20% downward**
- **Designed by MAUL: Developed and engineered in Germany**
- **GS mark, technical safety concept "Made by MAUL"**
- Motion sensor: Automatically dims the light after 30 minutes and turns it off after another 30 minutes if no motion is detected
- Daylight sensor: The lamp's light output adjusts depending on ambient light levels
- Glare control to UGR <16 for fatigue-free viewing
- Pole and head made of high-quality aluminum
- Large lamp head: Extends 80 cm above the desk
- Closed lamp head
- Practical: Diffuser for minimal shadow casting
- Zero power consumption when turned off thanks to the on/off switch
- Practical: Removable power cord simplifies setup
- Switzerland: Also available with power cord (Swiss plug/IEC socket). Please add the abbreviation .CH to the item number
- Protection class IP20

- Light source and ballast can be replaced by a qualified electrician
- Packaging made of cardboard, without plastic components

Illuminance of the : 940 lux illuminance at 85 cm distance, 580 lux illuminance at 110 cm distance
 Colour temperature per light source: 2.700 Kelvin (warm white) to 5.700 Kelvin (daylight white)
 Number of light sources: 2
 Energy efficiency class per light source: indirect: C (spectrum A to G) & direct: D (spectrum A to G)
 Weighted energy consumption per light source: 87 kWh/1000 h (69 kWh/1000 h & 18 kWh/1000 h)
 Service life L70B50 per light source: 50.000 h
 Useful luminous flux per light source: 15150 lm (12500 lm & 2650 lm)
 Material: Head: Aluminium - Column: Aluminium
 Dimensions: Head: 85.5 x 24 x 3.1 cm - Column: 4.3 x 5.2 x 193 cm
 Movement: Head: fixed
 Position of the switch: Column

- Stable, solid steel base, 27 x 45.5 cm. Does not get in the way: the cut-out footplate can be positioned around a table leg.
Height: 196 cm

Art. No.	Colour	EAN-Code	Tariff-No.	Base	Cable length (approx.)	Protection class	Pack size / PU	Weight (incl. packaging)	PU
8258802	white	4002390091411	94052190	base	2,50 m	I shock-proof plug	119 x 46 x 15 cm	16,01 kg	1 pc(s).
8258895	silver	4002390091398	94052190	base	2,50 m	I shock-proof plug	119 x 46 x 15 cm	16,01 kg	1 pc(s).