


## Item No. 42593

# Delock External Enclosure M.2 Key B 80 mm SSD > USB 3.1 Gen 2 Type-A male

**M.2**

### Description

This enclosure by Delock enables the installation of an M.2 SSD in 2280, 2260, 2242 and 2230 format, it can be connected via USB Type-A to the PC or laptop.

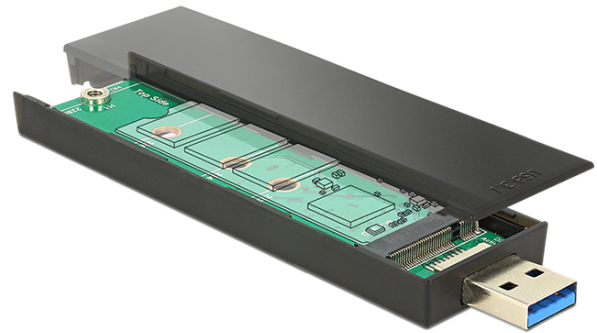

### Specification

- Connectors:
  - external: 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) Type-A male
  - internal: 1 x 67 pin M.2 key B slot
- Chipset: Asmedia ASM1351
- Interface: SATA
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B based on SATA
- Maximum height of the components on the module: 1.35 mm, application of double-sided assembled modules supported
- Data transfer rate up to 6 Gbps
- LED indicator for power and access
- Maximum power for modules: 3 A
- Short circuit protection, over heating protection
- ESD protection up to 2 kV
- Dimensions (LxWxH): ca. 103 x 28 x 10 mm
- Hot Plug, Plug & Play

### System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 4.6.x
- PC or laptop with a free USB Type-A port

### Package content

- External enclosure
- Mounting material
- User manual

### Additional Information

EAN: 4043619425938

Country of origin: Taiwan, Republic of China

Package: Retail Box



### Images



General	
function:	Hot Plug Plug & Play
Supported operating system:	Linux ex Kernel 4.6 Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
Maximum height of the components on the module:	1.35 mm application of double-sided assembled modules supported
Interface	
External:	1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) Type-A male
Internal:	1 x 67 pin M.2 key B slot
Technical characteristics	
Chipset:	Asmedia ASM1351
Data transfer rate:	10 Gbps
Physical characteristics	
Housing material:	Plastic
Length:	103 mm
Width:	28 mm
Height:	10 mm
Colour:	black