

# Rittal – The System.

Faster – better – everywhere.

## ► PDU basic – DK 7979.134

Date : Jul 5, 2021

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LÖH GROUP



# PDU basic – DK 7979.134

created: 05.07.2021 on [www.rittal.com/com-en](http://www.rittal.com/com-en)

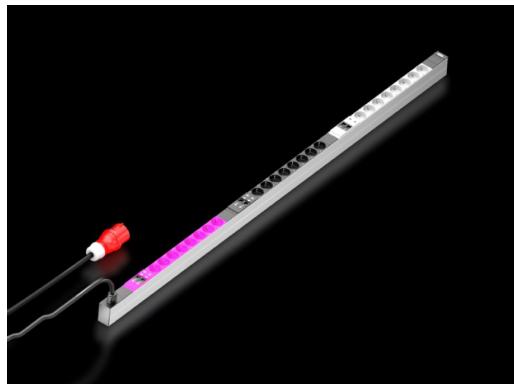

## Product description

**Description:** Compact basic power distribution. Thanks to the PDU basic, any IT rack can easily be equipped with a professional power distribution system. Depending on the PDU design, horizontal mounting in the 482.6 mm (19") level or vertical mounting (including in the zero-U space) is possible.

**Benefits:** For vertical mounting, it may be attached in the zero-U space of the Rittal VX IT or TS IT rack with no need for tools  
Colour coding of phases and fuse circuits (L1=pink, L2=black, L3=white)  
Tool-free divider kit for VX IT

**Material:** Extruded aluminium section, anodised  
Slots: Plastic

**Protection category** IP 20  
**IP to IEC 60 529:**

**Standards:** EN 62368-1  
EN 61000-3  
EN 61000-4  
EN 61000-6  
EN 62053-21

**Directives:** EMC Directive 2014/30/EU  
Low Voltage Directive 2014/35/EU

**Supply includes:** Connector lock for IEC C14 and C20 connectors  
Assembly parts

**Options:** Type 3 overvoltage protection with interchangeable arresters while operational, with status monitoring, suitable for integration into PDU enclosure  
Other enclosure colours are available

## Product description

|                                       |   |
|---------------------------------------|---|
| <b>Variant:</b>                       | passive   |
| <b>Sockets:</b>                       | 24 x earthing-pin   |
| <b>To fit:</b>                        | Enclosure type: Enclosure frame<br>Enclosure type: 482.6 mm (19") mounting angles<br>Height: ≥ 1800 mm<br>Height: ≥ 2000 mm     |
| <b>Dimensions:</b>                    | Width: 44 mm<br>Depth: 70 mm<br>Length: 1695 mm   |
| <b>Rated operating voltage:</b>       | 400 V (AC)  |
| <b>Infeeds:</b>                       | Qty.: 1<br>Phases per infeed: 3~  |
| <b>Length of connection cable:</b>    | 3 m   |
| <b>Ambient conditions:</b>            | Operating temperature: +5 °C...+50 °C<br>Storage temperature: -20 °C...+70 °C<br>Ambient humidity (non-condensing): 10 % - 95 % |
| <b>Circuit-breaker 16 A (qty.):</b>   | 6   |
| <b>Type of electrical connection:</b> | CEE   |
| <b>Rated current (max.):</b>          | 32 A  |
| <b>Output:</b>                        | 22 kW   |
| <b>Packs of:</b>                      | 1 pc(s).  |
| <b>Copper weight (kg per piece):</b>  | 0   |
| <b>EAN:</b>                           | 4028177947504   |
| <b>Customs tariff number:</b>         | 85366990  |
| <b>ETIM 7.0:</b>                      | EC000330  |
| <b>ETIM 6.0:</b>                      | EC000330  |
| <b>eCl@ss 8.0/8.1:</b>                | 27142604  |
| <b>eCl@ss 6.0/6.1:</b>                | 27142604  |

---

**Product description:** PDU basic 32A/3P CEE 24xCEE7/3 earthing-pin, DK PDU basic, Compact basic power distributor, WHD: 44x1695x70, CEE 7/3: 24 x earthing-pin

---

## Approvals

**Certificates:** EAC

---

**Declarations:** Declaration of conformity

---