



by Schneider Electric

# Easy PDU Basic Rack Power Distribution Unit

## Overview

### EPDU1116B-SCH, EPDU1132B-SCH

The APC by Schneider Electric Easy PDU, Basic Rack Power Distribution Unit distributes power to devices in the rack.

#### Outlets.

EPDU1116B-SCH - The Rack PDU has fourteen (14) DIN49440-SCHUKO, 16A outlets.

EPDU1132B-SCH - The Rack PDU has two banks of outlets. Bank 1 has ten (10) DIN49440-SCHUKO, 16A outlets. Bank 2 has eleven (11) DIN49440-SCHUKO 16A outlets.

**Power cord.** The power cord is 3 m (9.8 ft) in length.

EPDU1116B-SCH - The input connection is a SCHUKO 16A connector.


EPDU1132B-SCH - The input connection is an IEC-309 32A 2P+E connector.

#### Circuit breakers.

EPDU1116B-SCH has no circuit breakers.

EPDU1132B-SCH has two (2) 16A 1-pole hydraulic-magnetic circuit breakers, one for each bank of outlets.

**Mounting.** Two brackets and mounting hardware are provided with the Rack PDU. The Rack PDU also has two (2) toolless mounting pegs installed for 0U mounting capability in a rack or enclosure.

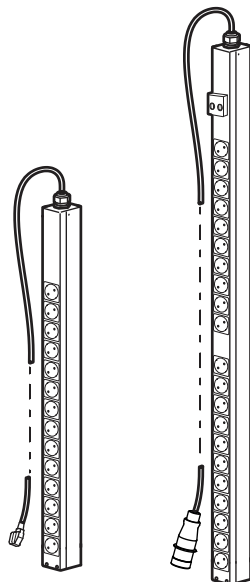

# Specifications

	EPDU1116B-SCH	EPDU1132B-SCH
<b>Electrical</b>		
Nominal Input Voltage	200 - 240 VAC 1 PHASE	
Maximum Input Current (Phase)	16A	32A
Input Frequency	50/60Hz	
Input Connection	SCHUKO 16A	IEC 309 32A 2P+E
Output Voltage	200 - 240 VAC 1 PHASE	
Output Connections	DIN49440-SCHUKO (14) Max. output current 16A	Bank1: DIN49440-SCHUKO (10) Max. output current 16A  Bank2: DIN49440-SCHUKO (11) Max. output current 16A
Circuit Breakers	None	Two (2) 16A 1-pole hydraulic-magnetic circuit breakers
<b>Physical</b>		
Dimensions (H x W x D)	902 x 62 x 44.4 mm (35.5 x 2.44 x 1.74 in)	1506 x 62 x 44.4 mm (59.29 x 2.44 x 1.74 in)
Input power cord length	3 m (9.8 ft)	3 m (9.8 ft)
Shipping dimensions (H x W x D)	1320 x 160 x 110 mm (52.0 x 6.30 x 4.33 in)	1660 x 160 x 110 mm (65.35 x 6.30 x 4.33 in)
Weight/Shipping weight	1.94 kg (4.27 lb)/ 2.84 kg (6.26 lb)	4.3 kg (9.47 lb)/ 5.5 kg (12.12 lb)
<b>Environmental</b>		
Maximum elevation (above MSL) Operating/Storage	0–3000 m (0–10,000 ft) / 0–15000 m (0–50,000 ft)	
Temperature: Operating/Storage	–5 to 45°C (23 to 113°F)/ –25 to 65°C (–13 to 149°F)	
Humidity: Operating/Storage	5–95% RH, non-condensing	
<b>Compliance</b>		
EMC verification	CE EN55035, EN55032, EN55024	
Safety verification	CE, TUV, EN/IEC62368-1	
CE EU Contact Address	Schneider Electric, 35 rue Joseph Monier 92500 Rueil Malmaison France	
Environmental	RoHS & Reach	

Customer support and warranty information are available on the APC by Schneider Electric website, [www.apc.com](http://www.apc.com).

© 2019 APC by Schneider Electric. APC and the APC logo are owned by Schneider Electric S.E. All other trademarks are property of their respective owners.

**990-91340**  
**11/2019**