


OVERVIEW

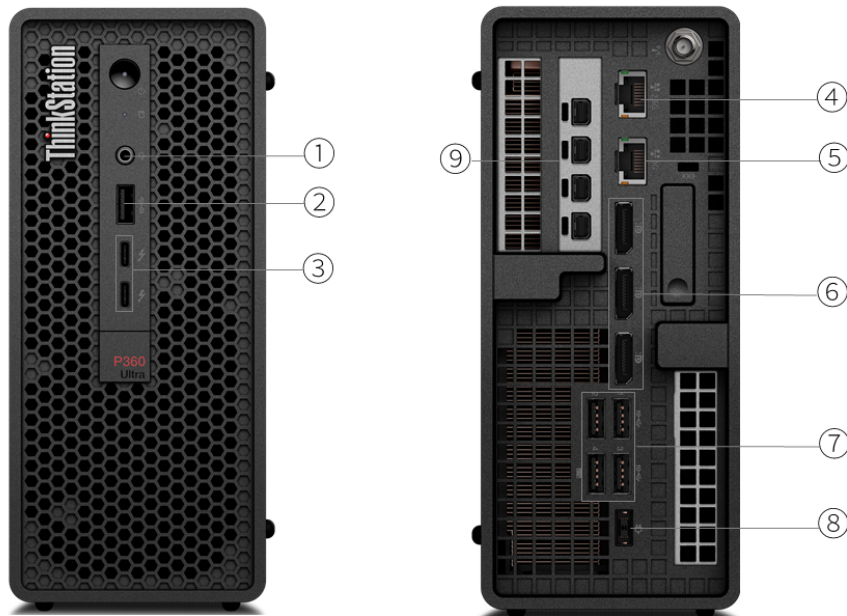

1. Headphone (3.5mm)	6. 3x DisplayPort
2. USB 3.2 Gen 2	7. 4x USB 3.2 Gen 2
3. 2x Thunderbolt 4	8. Power connector
4. Ethernet (2.5GbE RJ-45)	9. Optional ports on expansion cards *
5. Ethernet (GbE RJ-45)	

Notes:

- Ports with * are only available on selected models

PERFORMANCE

Processor

Processor Family

12th Generation Intel® Core™ i3 / i5 / i7 / i9 processor, supports processors up to 16 cores; up to 5.2GHz; up to 125W TDP

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core i3-12100	4 (4 P-core + 0 E-core)	8	P-core 3.3GHz	P-core 4.3GHz	12MB	DDR5-4800	Intel UHD Graphics 730
Core i3-12300	4 (4 P-core + 0 E-core)	8	P-core 3.5GHz	P-core 4.4GHz	12MB	DDR5-4800	Intel UHD Graphics 730
Core i5-12400T	6 (6 P-core + 0 E-core)	12	P-core 1.8GHz	P-core 4.2GHz	18MB	DDR5-4800	Intel UHD Graphics 730
Core i5-12600	6 (6 P-core + 0 E-core)	12	P-core 3.3GHz	P-core 4.8GHz	18MB	DDR5-4800	Intel UHD Graphics 770
Core i5-12400	6 (6 P-core + 0 E-core)	12	P-core 2.5GHz	P-core 4.4GHz	18MB	DDR5-4800	Intel UHD Graphics 730
Core i5-12500	6 (6 P-core + 0 E-core)	12	P-core 3.0GHz	P-core 4.6GHz	18MB	DDR5-4800	Intel UHD Graphics 770
Core i5-12600K	10 (6 P-core + 4 E-core)	16	P-core 3.7GHz / E-core 2.8GHz	P-core 4.9GHz / E-core 3.6GHz	20MB	DDR5-4800	Intel UHD Graphics 770
Core i7-12700	12 (8 P-core + 4 E-core)	20	P-core 2.1GHz / E-core 1.6GHz	P-core 4.8GHz / E-core 3.6GHz	25MB	DDR5-4800	Intel UHD Graphics 770
Core i7-12700K	12 (8 P-core + 4 E-core)	20	P-core 3.6GHz / E-core 2.7GHz	P-core 4.9GHz / E-core 3.8GHz	25MB	DDR5-4800	Intel UHD Graphics 770
Core i7-12700T	12 (8 P-core + 4 E-core)	20	P-core 1.4GHz / E-core 1.0GHz	P-core 4.6GHz / E-core 3.4GHz	25MB	DDR5-4800	Intel UHD Graphics 770
Core i9-12900	16 (8 P-core + 8 E-core)	24	P-core 2.4GHz / E-core 1.8GHz	P-core 5.0GHz / E-core 3.8GHz	30MB	DDR5-4800	Intel UHD Graphics 770
Core i9-12900K	16 (8 P-core + 8 E-core)	24	P-core 3.2GHz / E-core 2.4GHz	P-core 5.1GHz / E-core 3.9GHz	30MB	DDR5-4800	Intel UHD Graphics 770
Core i9-12900T	16 (8 P-core + 8 E-core)	24	P-core 1.4GHz / E-core 1.0GHz	P-core 4.8GHz / E-core 3.6GHz	30MB	DDR5-4800	Intel UHD Graphics 770

Processor Sockets

1x FCLGA1700

Operating System

Operating System**

- Windows® 11 Pro 64
- Windows 11 Home 64
- Windows 11 DG Windows 10 Pro 64
- Ubuntu Linux
- Red Hat Enterprise Linux (certified only)
- No operating system

Graphics

Integrated Graphics**

- Intel UHD Graphics 730
- Intel UHD Graphics 770

Discrete Graphics Support

Supports up to one NVIDIA® RTX A5000 Laptop GPU (available on August 2022, up to RTX A2000 at launch)

Discrete Graphics Offering**

Graphics	Memory	Power	Connector	SLI / NVlink
NVIDIA T400	4GB GDDR6	40W	3x miniDP 1.4	None
NVIDIA T1000	8GB GDDR6	50W	4x miniDP 1.4	None
NVIDIA RTX A2000	12GB GDDR6	70W	4x miniDP 1.4a	None
NVIDIA RTX A5000 Laptop GPU	16GB GDDR6	115W	4x miniDP 1.4a	None

Monitor Support

Monitor Support

Supports up to 8 independent displays, 4 via onboard ports (3x DP and 2x Thunderbolt™, simultaneously supports 4 display) and 4 via discrete graphics.

Onboard ports support (with max simultaneous displays):

- DP supports up to 4096x2160@60Hz
- Thunderbolt supports up to 5120x2880@60Hz

Discrete graphics ports support (with max simultaneous displays):

- miniDP supports up to 5120x2880@60Hz

Chipset

Chipset

Intel W680 chipset

Memory

Max Memory^[1]

Up to 128GB

Memory Type^{**[2]}

- DDR5-4800 ECC
- DDR5-4800 non-ECC

Memory Slots

Four DDR5 SO-DIMM slots, dual-channel capable

Memory Protection

ECC on models with ECC DIMMs and ECC capable processor

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.
2. ThinkStation® P360 Ultra comes with DDR5-4800 memory and will run at DDR5-4000 or DDR5-3600 due to platform limitation: 4x 32GB or four memory DIMMs with WIFI configuration runs at DDR5-3600; other configurations run at DDR5-4000

Storage

Storage Support^[1]

Up to 1x 2.5" HDD + 2x M.2 SSD

- 2.5" HDD up to 1TB
- M.2 SSD up to 4TB each

Storage Type^{***}

Disk Type	Interface	RPM	Offering	Security
2.5" SATA HDD	SATA 6Gb/s	7.2K	1TB / 1TB FIPS	-
M.2 2280 SSD	PCIe® NVMe®, PCIe 4.0 x4 Performance	-	512GB / 1TB / 2TB / 4TB	Opal2

Storage Controllers^{***}

Storage Controller	Type	Interface	RAID	Cache
Integrated NVMe controller	Standard	PCIe NVMe	0/1	None
Integrated SATA controller	Standard	SATA 6.0Gb/s	-	None

Notes:

1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC897-Q codec

Speakers

Single speaker

Power Supply

Power Supply**

Power	Type	Efficiency	Key Features
170W	Adapter	90%	100V - 240V
230W	Adapter	90%	100V - 240V
300W	Adapter	90%	100V - 240V

DESIGN

Mechanical

Form Factor

Mini-tower (3.9L)

Dimensions (WxDxH)

86 x 223 x 202 mm (3.4 x 8.7 x 7.9 inches)

Weight

3.6 kg (7.94 lbs, maximum configuration)

Bays

1x 2.5" disk bay (optional, comes with disk)

M.2 Slots

- Two M.2 PCIe Gen 4x4 slots (for SSD)
- One M.2 slot (for WLAN)

Expansion Slots

- One PCIe 4.0 x16
- One PCIe 3.0 x8 (x4 lanes)

CONNECTIVITY

Network

Onboard Ethernet

Two Ethernet, 2.5GbE + GbE, Intel Ethernet Connection I225-LM and I210-AT, 2x RJ-45, supports Wake-on-LAN

Optional Ethernet

Gigabit Ethernet, Intel I350-T2, 2x RJ-45, PCIe x4

WLAN + Bluetooth®**^[1]

- Intel Wi-Fi® 6 AX201, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2, M.2 Card
- Intel Wi-Fi 6E AX211, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2, M.2 Card
- No WLAN and Bluetooth

Notes:

1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitation

Ports^[1]

Front Ports

- 1x USB 3.2 Gen 2

- 2x Thunderbolt 4
- 1x headphone / microphone combo jack (3.5mm)

Rear Ports^[2]

- 1x Ethernet (GbE RJ-45)
- 1x Ethernet (2.5GbE RJ-45)
- 4x USB 3.2 Gen 2
- 3x DisplayPort™ 1.2

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt 3/4: 40 Gbit/s;
2. For video ports on discrete graphics, please see graphics section

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified

Physical Locks

Kensington® Security Slot, 3 x 7 mm

Chassis Intrusion Switch

Chassis intrusion switch

BIOS Security

- Administrator password
- Power-on password
- UEFI Secure Boot
- Self-healing BIOS

MANAGEABILITY

System Management

System Management**^[1]

- Intel vPro Enterprise with Intel AMT 16.0
- Standard Manageability

Notes:

1. Intel vPro offers a superset of DASH's defined capabilities.

SERVICE

Warranty

Base Warranty**^[1]

- 1-year limited onsite service
- 2-year limited onsite service
- 3-year limited onsite service with 9x5 NBD (for most models)
- No base warranty

Notes:

1. More information of warranty policy, please access <https://pcsupport.lenovo.com/warranty>

ENVIRONMENTAL

Operating Environment

Temperature

- Operating: 10°C (50°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

CERTIFICATIONS

Green Certifications

Green Certifications

- EPEAT™ Gold
- ENERGY STAR® 8.0
- TCO Certified 9.0
- RoHS compliant

Other Certifications

Mil-Spec Test

MIL-STD-810H military test in progress

ISV Certifications

ISV Certifications

Please visit [ISV certifications for Lenovo Workstations](#)

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

