


DATASHEET

USB2.0 Extension Cable A (angled)-A, M-F, 1.8m, black, Classic

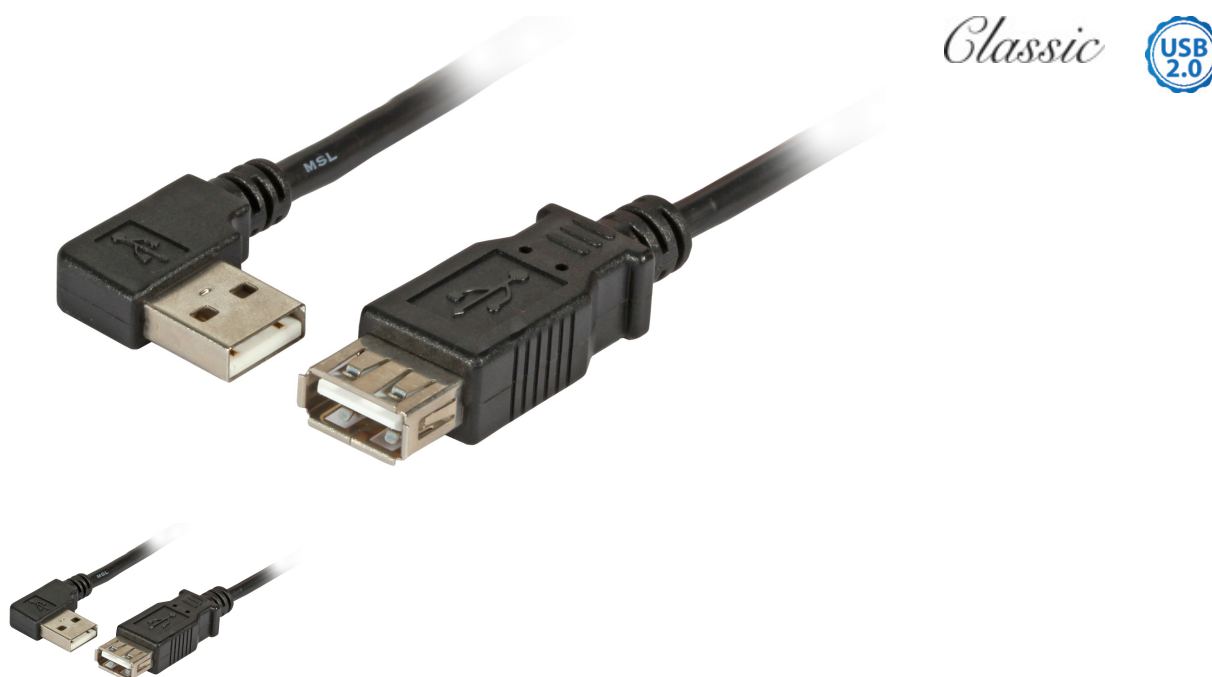

General data

Supports data transmission rates up to 480 Mbit/s. Wire diameter: AWG28 / AWG24. Shielded: folie + braiding. Plug moulded.

Allgemeine Daten

Number of poles connection 1	4
Number of poles connection 2	4

Kabelaufbau

Connection type connection 1	plug
Connection type connection 2	Jack
Type of connector connection 2	USB-A
Type of connector connection 1	USB-A 90°

Available variants

ArtNr.	Bezeichnung	Colour	Length
K5246SW.0,5	USB2.0 Extension Cable A (angled)-A, M-F, 0.5m, black, Classic	black	0.5 m
K5246SW.1	USB2.0 Extension Cable A (angled)-A, M-F, 1.0m, black, Classic	black	1.0 m

This datasheet was created automatically on 10-07-2023 . Technical changes reserved.




DATASHEET

USB2.0 Extension Cable A (angled)-A, M-F, 1.8m, black, Classic

K5246SW.1,5	USB2.0 Extension Cable A (angled)-A, M-F, 1.5m, black, Classic	black	1.5 m
K5246SW.1,8	USB2.0 Extension Cable A (angled)-A, M-F, 1.8m, black, Classic	black	1.8 m
K5246SW.3	USB2.0 Extension Cable A (angled)-A, M-F, 3.0m, black, Classic	black	3.0 m

Drawings

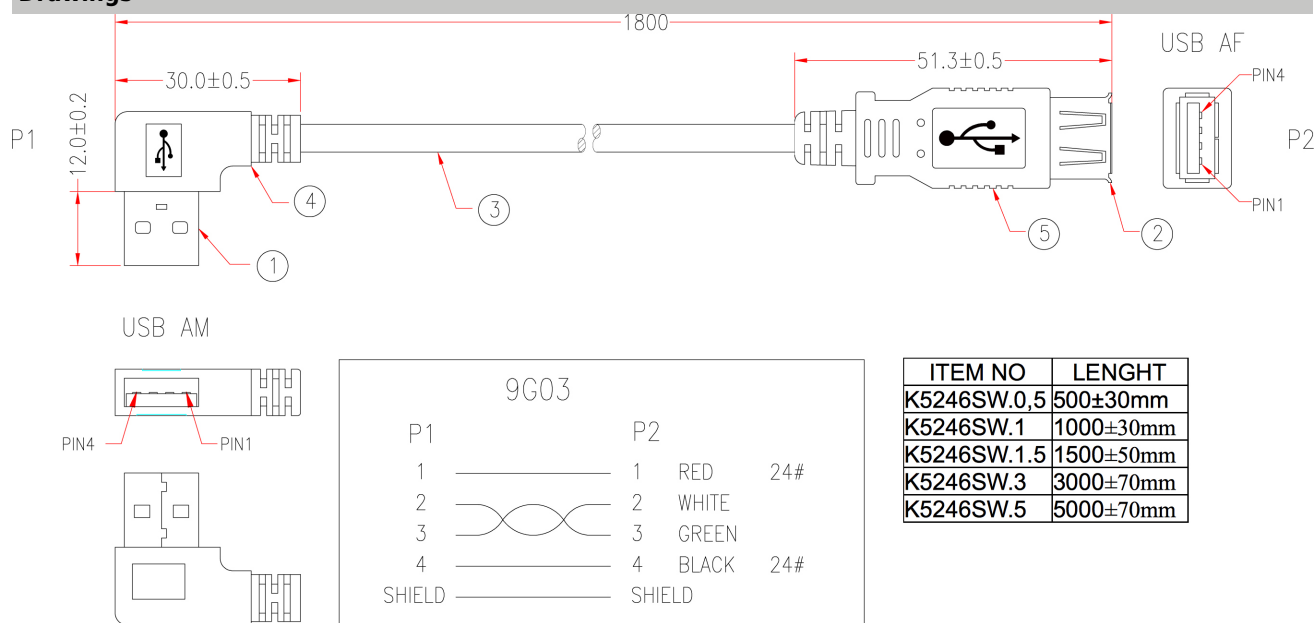

NOTE: ALL relevant materials are complied with RoHS directive

5	BLACK HEAT SHRINK TUBE $\varnothing 1.0 \times 10\text{mm}$	1	M743
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BLACK		M304
4	BLACK HEAT SHRINK TUBE $\varnothing 1.0 \times 10\text{mm}$	1	M743
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BLACK		M304
3	USB 2.0 CABLE, UL STYLE 1 TWISDED PAIR 28AWG AND 2C 24AWG, OD 4.5mm, JACKET BLACK, DRAWING No. EUAB2801P2402C-015	1800mm	M304
2	USB A FEMALE 2.0, GOLD PLATING 30u' ON CONTACTS, WHITE INSULATOR	1	M108
1	USB A MALE 2.0, GOLD PLATING 30u' ON CONTACTS, WHITE INSULATOR, SHORT A PIECE TYPE	1	M108
No.	DESCRIPTION	Q'TY	Supplier

This datasheet was created automatically on 10-07-2023 . Technical changes reserved.