



## EV2456-BK

## Your advantages

The EIZO FlexScan EV2456 meets the most demanding requirements of a modern computer workstation. Its image quality and ergonomic features are particularly impressive. With a resolution of 1920 x 1200 pixels, an IPS LCD panel with LED backlighting, and an anti-glare surface, this display excels at detailed, crystalclear image reproduction. This is fantastic for office work. Auto EcoView ensures a clear, anti-glare view of the screen and adapts the display brightness to the ambient lighting conditions. The ultra-slim monitor is very compact, thanks to its extremely narrow bezel. The monitor is virtually frameless and is particularly impressive when used for multi-screen viewing. Screen InStyle software, included in the delivery, allows you to control the screen from a Windows PC or from the network. You can operate multi-screen solutions in parallel using Screen InStyle.



- 24.1" LCD monitor with 16:10 aspect ratio and IPS technology for outstanding image quality
- Bezel only 1 mm on both sides and at the top: extremely compact and elegant design
- Contrast 1000:1, brightness 350 cd/m<sup>2</sup>, 178° viewing angle
- Flicker-free image reproduction thanks to hybrid brightness control
- Auto EcoView, EcoView Index, and EcoView Optimizer For maximum power savings and superb ergonomics
- Integrated speakers and headphone jack
- USB 3.0 hub with one upstream and two downstream ports
- DisplayPort, HDMI, DVI-D, and D-Sub inputs for digital and analog connection



#### Ultra-slim. Ultra-smooth!

Whether it's in sophisticated black or pristine, eye-grabbing white: The ultra-thin design with its bezel of only 1 mm and its completely flat and smooth front side is truly impressive. A thin black glass frame with a width of just 5.20 mm is all that separates the display and bezel from one another. Even from the thin side and smart-looking back, the monitor will make passers-by do a double take. The EV2456 model also offers a fully flat front surface with integrated sensor buttons.





#### Maximum image quality thanks to the IPS panel

The monitor is capable of all three key elements of excellent image quality: excellent resolution of 1920 x 1200 pixels, maximum contrast of 1000:1, and stable brightness of up to 350 cd  $/m^2$ . That means you will experience razor-sharp text contours, brilliant graphics, and clear images. Thanks to the high-quality IPS panels with LED backlight, contrasts and colors remain stable from every viewing angle.



**EIZO** monitor





EIZO monitor



Conventional monitor

When it comes down to color nuances, the integrated 10 bit look-up table (LUT) offers considerable advantages: the allocation of color information is considerably more precise than in other 8 bit look-up tables. The color gradations are extremely fine and offer customized configuration options: The color temperature control can be used to adjust white points from 4000 K to 10000 K in 500 K increments. In addition, the color saturation for RGB colors can be configured separately.





Without 10 Bit LUT

With 10 Bit LUT

#### Save electricity and your eyes with Auto-EcoView

At day, at night, bright, dark: No matter when and how you work, the Auto-EcoView function continuously measures changes of the ambient light and optimizes the monitor with ideal brightness values fully automatically by using a sensor. The benefits: Annoying glare is reduced, your eyes will not get tired as quickly. A special two-point control takes into account the brightest and darkest environment over the course of the day with the respectively desired screen brightness. Another advantage: Thanks to the automatic brightness adjustment, you will save up to 50% of your electricity costs in comparison to a monitor that is permanently operated at maximum brightness.

Of course, you can also continue to configure the monitor manually. EcoView Index is used for orientation on how environmentally friendly and economical your settings are.

#### Anti-reflection coating: more image, less reflection

The EV2456 offers a surface with optimal anti-reflection coating. By minimizing glare from the spread of the reflected light, the anti-reflection coating effectively protects your eyes from straining. This keeps your eyes from getting as tired and allows you to sit comfortably in front of the screen, without having to sit in a forced position to prevent glare.







#### Absolutely flicker-free:

To help protect your eyes, EIZO has developed a hybrid technology to control the backlight. This combines the benefits of the otherwise standard PWM (pulse width modulation) and DC (direct current) control. PWM control uses refresh rates of 18 kHz. The result: a flicker-free viewing experience Flickering is reduced down to absolute freedom from flickering, without impairing image quality or color stability. In addition, the brightness can be set to less than 1% of the maximum value in darkly lit rooms. The benefit: Your screen remains free from glare even under these conditions.

## FineContrast modes: Optimized display at the press of a button

The FineContrast modes make it easier for you to work and look at images, texts, or films. Because when choosing color settings, it makes a difference whether you are looking at a film, editing an image, surfing the net, or writing texts. You can configure the respective presettings for brightness, gamma correction, and color temperature at the press of a button. An example: Paper mode simulates the pleasant contrast of books by reducing the blue light portion. This protects your eyes while reading and stops them from getting tired.



User 1

Sample display

#### Screen InStyle

You can conveniently control the EV2456 either by using the Screen InStyle software on a Windows PC or by using the onscreen menu. The configuration options include color reproduction, energysaving options, and ergonomic functions that, for example, allow you to reduce the blue light portion (Circadian Dimming). The Screen InStyle software allows the user to apply the settings to all connected screens when using a multi-screen system.

#### More about Screen InStyle


Screen InStyle Server is a server application that allows system administrators to centrally manage and control monitors on which Screen InStyle is installed and which are connected to the network. This optimises power consumption and simplifies monitor asset management.

More about Screen InStyle Server

#### more about Screen InStyle

#### Monitor Configurator for cross-network settings

Reduced workload for network administrators: The software allows you to configure multiple monitors uniformly in a single step – via a USB connection. This saves you time and ensures you have the same settings on all screens. The configuration can be saved as an XML file and transferred to clients.

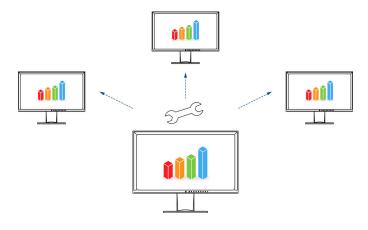

#### Operation made easy thanks to the Button Guide

The Button Guide provides all functions at a glance. Touching the button is enough and the screen will show all functions and the corresponding control panel.



#### Overdrive to quickly change images

Fast, faster, overdrive. The overdrive function accelerates switching time so that the gray-gray change takes only 5 ms on average. You can watch films and rapidly changing images without annoying afterglow.



#### LED backlight: Economical in consumption, free from mercury

The monitors with an LED backlight help save the environment throughout their entire service life – from manufacturing through operation to disposal. For on the one hand they are characterized by particularly low electricity consumption. The typical consumption is just 11 Watt. On the other hand, they are free from mercury – a substance that is harmful to both humans and the environment and is very difficult to dispose of.



#### Save up to 30% of energy with the EcoView Optimizer

Save electricity without compromising quality: The EcoView Optimizer reduces the background lighting fully automatically for dark images. This reduces electricity consumption by up to 30%. At the same time, the signal is amplified and the color tone values adjusted. The result: You will enjoy the image quality you are used to but consume less power.

#### Zero-Watt consumption thanks to the power switch

The monitors have an integrated mechanical power switch, which is extremely practical and energy-saving: If you switch off the monitor using the power switch, the device will stop consuming any power at all. Moreover, it consumes a maximum of 0.50 watt in standby mode.

#### One monitor, many ports

It doesn't get easier than this: You can connect most of your devices, such as PC, laptop or cameras directly to the monitor because the monitor has a number of different ports. That makes your daily work easier.


#### Perfectly organized

The monitor ships with a cable holder, which ensures a clean desk and prevents messy cabling.



#### **Flexible base**

Ergonomic and stable: the adjustable base focuses on ergonomics. The monitor base can be twisted, turned, and tilted so that it is most comfortable for your back, neck, and sitting posture. The height can also be seamlessly adjusted and, depending on the model, lowered to the bottom of the base, allowing you to position the top row of the image ergonomically below eye level.



172° (right/left)

Rotation 90° (right and left) clockwise and anti-clockwise



#### Five-year warranty

EIZO grants a five-year warranty. This is possible thanks to the highly developed production process based on a simple principle of success: sophisticated and innovative monitor technology, made from high-end materials.





# Specification

ltem no.	EV2456-BK	Power consumption (typical) [in watt]	11.00
Case colors	Black	Maximum Power Consumption [ in	44
Solutions	Office	watt ]	
Product line	FlexScan	Power Save Mode [ in watt ]	0.50
EAN	4995047049722	Power Consumption Off [ in watt ]	0
Variants	EV2456-WT (Color: White)	Energy-efficiency class	A++
		Annual Energy Consumption [ in kWh ]	19
Display		Auto-EcoView	$\checkmark$
RadiCS application classes	VIII	EcoView-Index	$\checkmark$
Screen size [in inches]	24.10	EcoView-Optimizer	$\checkmark$
Screen size [in cm]	61.10	Power Supply	AC 100-120 V / 200-240 V, 50/60 Hz
Format	16:10	Power Management	VESA DPMS, DVI-DMPM, DisplayPort Version 1.1a, B
Viewable image size (width x height)	518 x 324		Timer
Ideal and recommended resolution	1920 x 1200	Integrated power unit	$\checkmark$
Pixel Pitch Horizontal [ mm ]	0.27 × 0.27		
Resolution Supported	1920 x 1200, 1600 x 1200, 1680 x 1050, 1280 x 1024, 1024 x 768, 800 x 600, 720 x 400, 640 x 480	Certification & Standards	
Panel technology	IPS	Certification	CE, TÜV/GS, TÜV/Ergonomics, TCO 7, Energy Star,
Max. viewing angle horizontal	178 °		9241-307 Klasse 1**, RCM, CB, cTÜVus, FCC-B, IC
•••	178 °		003-B (CAN), TÜV/S, VCCI-B, RoHS, WEEE, CCC
Max. viewing angle vertical		Software & Accessories	
Number of colors or grayscale	16.7 million colors (display port, 8 Bit), 16.7 million colors (HDMI, 8 Bit), 16.7 million colors (DVI, 8 Bit), 16.7 million colors (Dsub, 8 Bit)	Software & Accessories Accompanying software and other	ScreenManager PRO, ScreenSlicer, Screen InStyle
Max. color space	sRGB	accessories are available for download or on a CD	
Max. brightness (typical) [in cd/m²]	350		
Max. dark room contrast (typical)	1000:1	Additional Supply	Network cable, Signal cable DisplayPort - DisplayPor USB 3.0 cable, Quick guide, Manual on CD, Cable
Typical response time [gray/gray	5 ms	<b>A</b>	protection EIZO ScreenCleaner (for the best possible clean witho
alternation]	60	Accessory	scratching the monitor), HH200HS-K (HDMI (High
Max. refresh rate [ in hertz ] Backlight	LED		Definition Multimedia Interface) cable to transfer digite video and audio signals.), PM200-K (DisplayPort cab to transfer digital video and audio signals.), PCSK-03. (This Clear Manuf for the EIZO Elevend 4
Features			(Thin Client Mount for the EIZO FlexStand 4 Stand)
Color palette / look-up table	1.06 billion color tones / 10 Bit	Warranty	
Overdrive	$\checkmark$	Warranty and service	5 years
No flickering thanks to hybrid controls	$\checkmark$	,	
Signal range amplifier (HDMI)	$\checkmark$		
HDCP Decoder	$\checkmark$	Terms	
Preset color/grayscale modes	sRGB, Paper, Movie, DICOM, 2x free modes for user selection	**) Zero pixel error guarantee for complete	ely lit sub-pixels (partial pixels ISO 9241-307). Valid: si
DICOM tone curve		months from the purchase date.	
OSD language	de, en, fr, es, it, se, ja, zh		
Adjustment options	Brightness, Contrast, Gamma, All EcoView functions, Color saturation, Color temperature, FineContrast, Colour tone, Signal input, Overdrive, Resolution, Audio source, Smoothing, OSD language, Interpolation, Volume		
Button Guide			
Signal inputs	DisplayPort, DVI-D, HDMI, Dsub		
Video Signal	DisplayPort, DVI (TMDS), HDMI (YUV und RGB), RGB Analog		
Input Signal Identification	✓		
Sync Formats	Separate		
Audio Input	3.5 mm stereo jack, DisplayPort, HDMI		
Audio Output	3.5 mm stereo jack		
Built-in speakers	$\checkmark$		
USB hub	1 Up-/ 2 Down-Stream, Rev. 3.0		
Dimensione 8 M/-+- Lu			
Dimensions & Weights	521 - 357 488 - 233		
Dimensions [ mm ]	531 x 357-488 x 233		
Weight [ in kilograms ]	5 70		

Dimensions [ mm ]	531 x 357-488 x 233
Weight [ in kilograms ]	5.70
Dimensions Without Stand [ mm ]	531 x 342 x 46
Weight Without Stand [ in kilograms ]	3.70
Swivel (right/left)	172 °
Incline forward/backward	5 ° / 35 °
Pivot	$\checkmark$
Height Adjustment Range [ mm ]	158.6
Hole Spacing	VESA standard 100 x 100 mm

EIZO Limited

Stylus House | London Road | Bracknell | Berkshire | RG12 2UT

All product names are trademarks or registered trademarks of the FIZO Corporation in Japan and in other countries, or trademarks or registered trademarks of the respective company. Copyright © 2018 FIZO Corporation. All rights reserved, modifications and errors excepted.

Phone: 01344 317 480 | Fax: 01344 308122 www.eizo.co.uk