


Data Sheet

BenQ IL430I

Large format touch screen

- Germ-Resistant Screen
- Anti-Finger-Print Coating
- Android 8.0
- X-Sign 2.0
- DMS
- OPS Slot

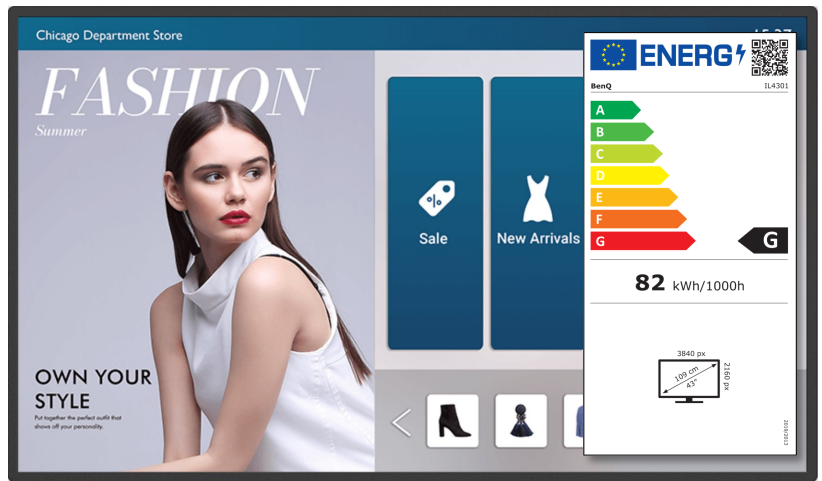

X-Sign



Panel

Modell : IL430I

Item. No. / EAN Code : 9H.F7EPK.RA2 / 471 8755 08662 5

Type : 109,22 cm / 43" Wide TFT

Native Resolution : 3.840 x 2.160 4K / 16:9

Active Display Area B x H : 941,2 x 529,4 mm

Panel / Pixel pitch : 10 Bit / 0,25 x 0,25 mm

Cover Glass Thickness / Hardness : 3,2 mm / 9H

Cover Glass Coating : Haze, 3%

Colour Gamut : 72% NTSC

Backlight : Direct LED, 40.000 Std. (typical)

Brightness : 400 cd/m2

Contrast : 1.200:1 (typ.)

Response time : 8 ms

Inputs

Video : VGA 1x, HDMI (2.0) 2x, DP (1.2) 1x

Audio : 3,5 mm RCA 1x

USB : USB Type A (2.0) 2x, USB Type B (Touch) 1x

Control : RS232 1x, IR In 1x,

Network : RJ45 2x

OPS Slot : 1x

Outputs

Video : HDMI (2.0) 1x

Audio : Line-Out (3,5 mm RCA) 1x, SPDIF 1x

Audio

Build in Loudspeaker : 10W x 2

Touch

Touch Technology : IR-Touch

Resolution / Capacity : 32.768 x 32.768 / 40 Touch points

Accuracy : $\pm 1,0$ mm

OS Compatibility : Windows XP/7/8/10 | Linux | Mac OS X | Android | Chrome

Touch Output : USB (Type B) 1x

Extra

Software : X-Sign Broadcast, X-Sign 2.0, DMS Cloud/Local,
TeamViewer Meeting, WPS, Firefox, TeamViewer QS,
InstaShare I

System / Memory : Android 8.0 / 3 GB System Memory, 32 GB Storage
Memory

VESA Mounting : 200 x 400 mm, M6x8L

Installation : Landscape- / Portrait

Operating time hours / days : 24 / 7

Energy

Power supply : Internal

Operating voltage : 100 ~ 240 VAC ; 50 / 60 Hz

Power consumption (typ.) : < 82 W

Sleep Mode / Off : < 0,5 W

Certifications

Safety / Energy : CE, EnergyStar 8.0

Environment

Operation : 0 ~ +40°C ; 10 ~ 80% air humidity

Storage : -10 ~ +60°C ; 10 ~ 90% air humidity

Physical

Weight : 18,8 kg (nett) / 24,0 kg (gross)

Frame width : 16,6 mm (left / up) ; 16,6 mm (right / down)

Size (W x H x D) : 1011,0 x 599,2 x 97,4 mm

Accessories : IR-Remote, Power cable, VGA cable (1,5 m), HDMI cable
(1,5 m), DP cable (1,5 m), USB-Touch cable (1,5 m),
Quick start Guide, User manual (online)

Warranty terms : 3 years OSE (on site exchange)

BenQ IL430I

Dimension:

