

ProArt Display PA34VCNV



Key Features

WQHD
3440x1440

The WQHD resolution is 2.5 times than Full HD, providing much more detailed graphics



Curved 3800R

Frameless design in 3800R curvature for immersive visual enjoyment



Ultra-wide

More space to spread out your various work windows for more productive multitasking



International color standard 100% sRGB / 100% Rec. 709 color space for digital images and video production



IPS technology is optimized for the finest image quality with 178° wide-viewing-angle



Factory pre-calibrated with ASUS advanced gray-scale tracking technology to guarantee the ΔE color difference value is less than 2



USB Type-C Monitor

USB-C connection for DisplayPort, USB data transmission and supports 96W power delivery



RJ-45

Delivers stable Internet connection and one-cable docking to your laptop with RJ45 and USB-C connection



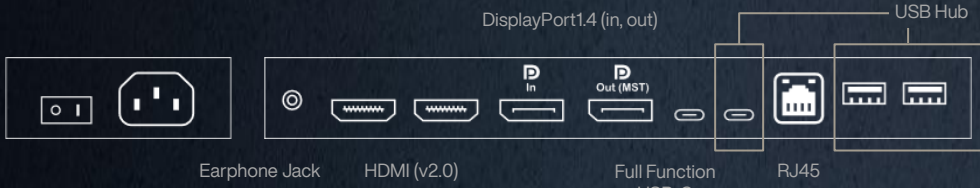
Ergonomic Stand

With an ergonomically-designed stand with tilt, swivel and height adjustments



ProArt Display PA34VCNV

Spec Sheet

Display	<p>Panel Size (inch) : 34.1 Aspect Ratio : 21:9 Display Viewing Area (H x V) : 799.8 x 334.8 mm Display Surface : Non-Glare Backlight Type : LED Panel Type : IPS Viewing Angle (CR≥10, H/V) : 178° / 178° Curvature : 3800R Pixel Pitch : 0.2325mm Resolution : 3440x1440 Color Space (sRGB) : 100% Brightness (Typ.) : 300cd/m² Contrast Ratio (Typ.) : 1000:1 Display Colors : 1073.7M (10 bit) Response Time : 5ms(GTG) Refresh Rate (Max) : 60Hz HDR (High Dynamic Range) Support : HDR-10 Flicker-free : Yes LCD ZBD Warranty : Yes(3 yr)</p>
Video Feature	<p>Trace Free Technology : Yes ProArt Preset : Native / sRGB / DCI-P3 / DICOM / Rec. 709 / HDR / User Mode 1 / User Mode 2 Gamma Adjustment : Yes (Support Gamma 1.8/2.0/2.2/2.4/2.6) Color Accuracy : $\Delta E < 2$ ProArt Palette : Yes QuickFit Plus : Yes PIP / PBP Technology : Yes HDCP : Yes, 2.2 VRR Technology : Adaptive-Sync Low Blue Light : Yes (Hardware Solution)</p>
Audio Feature	<p>Speaker : Yes (2Wx2)</p>
IO ports	<p>USB-C x 1 (DP Alt Mode) DisplayPort 1.4 x 2 (Daisy Chain) HDMI (v2.0) x 2 USB-C Power Delivery : 96W</p> <p>USB Hub : Yes (USB 3.2 Gen 1 Type-C x 1, USB 3.2 Gen 1 Type-A x 2) Earphone Jack : Yes RJ45 x 1</p> 
Signal Frequency	<p>Digital Signal Frequency : HDMI: 15~135 KHz (H) / 48~60 Hz (V) USB-C, DisplayPort: 135~135 KHz (H) / 48~60 Hz (V)</p>
Power Consumption	<p>Power On (Typical): < 26.9W Power Saving Mode: < 0.5W ; Power Off Mode : 0W (Hard Switch) 100~240V, 50/60Hz</p>
Mechanical Design	<p>Tilt : Yes (+23° ~ -5°) Swivel : Yes (+15° ~ -15°)</p> <p>Height Adjustment : 0~130mm VESA Wall Mounting : 100x100mm Kensington Lock : Yes</p>
Dimensions (Est.)	<p>Phys. Dimension with Stand (W x H x D) : 817.2 x (439.2~569.2) x 240.0 mm Phys. Dimension without Stand (W x H x D) : 817.2 x 369.7 x 91.7 mm Box Dimension (W x H x D) : 1080 x 520 x 190 mm</p>
Weight (Est.)	<p>Net Weight with Stand : 10.8 Kg Net Weight without Stand : 7.8 Kg Gross Weight : 16.3 Kg</p>
Accessories	<p>Power cord, USB-C cable (optional), HDMI cable (optional), DisplayPort cable (optional), Calibration Report, Quick Start Guide, Warranty Card, Welcome Card</p>
Compliance Standard	<p>UL/cUL, FCC, ICES-3, EPEAT Silver, OB, CE, ErP, WEEE, TUV-GS, TUV-Ergo, ISO 9241-307, UkrSEPRO, Ukraine Energy, CU, CCC, CEL, BSMI, RCM, VCCI, PSE, PC Recycle, J-MOSS, KC, KCC, e-Standby, PSB, Energy Star[®], TCO, CEC, RoHs, Windows 10/11 WHQL, TÜV Flicker-free, TÜV Low Blue Light, Calman Verified, CECP</p>

* Power Consumption is measuring a screen brightness of 200 nits without audio / USB / Card reader connection

**All specifications are subject to change without notice

