

# Rittal – The System.

Faster – better – everywhere.

## ► Second pair of mounting angles for Data Rack – DK 7299.000

Date : Jun 29, 2021

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# Second pair of mounting angles for Data Rack – DK 7299.000

created: 29.06.2021 on [www.rittal.com/com-en](http://www.rittal.com/com-en)

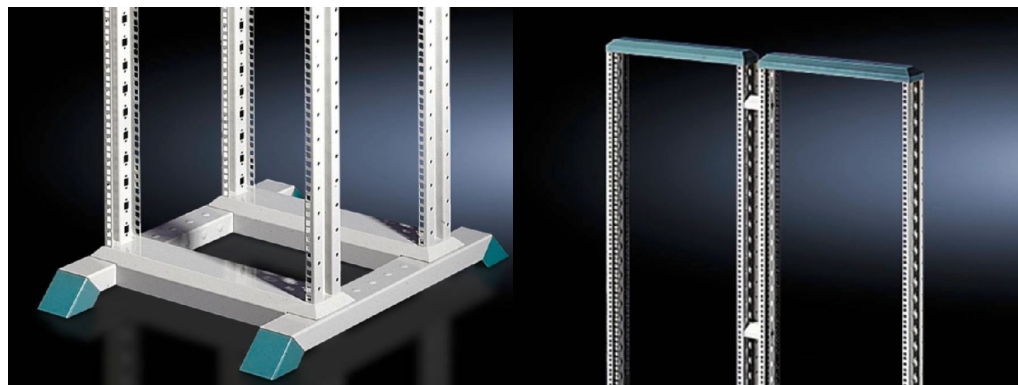

## Product description

<b>Description:</b>	To accommodate 482.6 mm (19") network components or for the attachment of component shelves and slide rails. 482.6 mm (19") punched profile at the front, hole centre distance 465 mm (470 mm at the rear), tailored to the attachment of patch panels and cable routing rails. The mounting level may be positioned on a 50 mm pitch pattern. Minimum distance between levels 150 mm, maximum distance between levels 350 mm.
<b>Material:</b>	Sheet steel, 2 mm
<b>Surface finish:</b>	Spray-finished
<b>Colour:</b>	Profile frame: RAL 7035 Trim panel: RAL 5018
<b>Supply includes:</b>	Torsionally stiff profile frame with 482.6 mm (19") punchings Mounting accessories

## Product description

<b>Units:</b>	45 U
<b>Installation dimensions:</b>	Installation width: 482,6 mm / 19"
<b>Packs of:</b>	1 pc(s).
<b>Weight/pack:</b>	14.63 kg
<b>Copper weight (kg)</b>	0

per piece):

---

**EAN:** 4028177128859

---

**Customs tariff number:** 94039010

---

**ETIM 7.0:** EC002620

---

**ETIM 6.0:** EC002620

---

**eCl@ss 8.0/8.1:** 27189261

---

**eCl@ss 6.0/6.1:** 27182590

---

**Product description:** DK Second pair of mounting angles, 45 U, 482.6 mm (19"), For Data Rack

---

## Approvals

---

**Certificates:** NA

---