


OVERVIEW

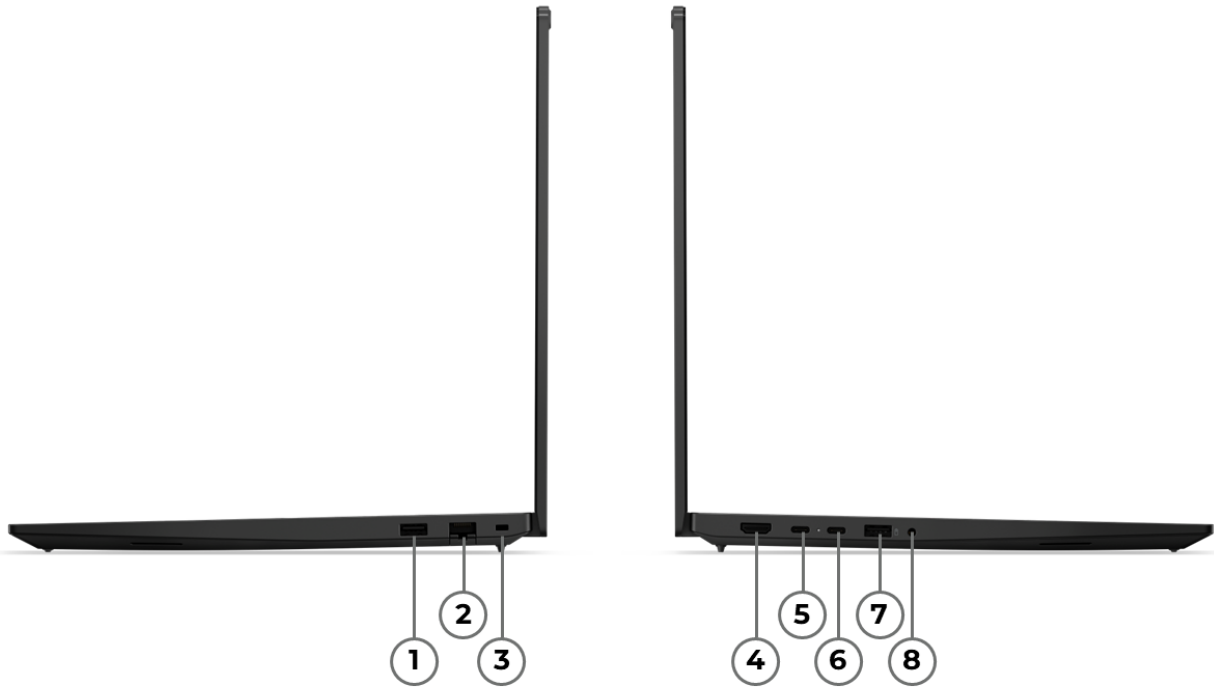

1. USB-A (USB 5Gbps)	5. USB-C (USB4 40Gbps), USB PD 45-65W & DP1.4a
2. Ethernet (RJ-45)	6. USB-C (USB4 40Gbps), USB PD 45-65W & DP1.4a
3. Kensington Nano Security Slot	7. USB-A (USB 10Gbps), Always On
4. HDMI	8. Headphone / microphone combo jack (3.5mm)

PERFORMANCE

Processor

Processor Family

- AMD Ryzen™ AI 5 / 7 400 Series Processor
- AMD Ryzen™ AI 5 PRO and Ryzen™ AI 5 / 7 300 Series Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics	NPU	Overall TOPS
AMD Ryzen™ AI 5 330	4	8	2.0GHz	4.5GHz	4MB L2 / 8MB L3	AMD Radeon™ 820M	AMD Ryzen™ AI, up to 50 TOPS	Up to 56 TOPS
AMD Ryzen™ AI 5 430	4	8	2.0GHz	4.5GHz	4MB L2 / 8MB L3	AMD Radeon™ 840M	AMD Ryzen™ AI, up to 50 TOPS	Up to 58 TOPS
AMD Ryzen™ AI 5 435	6	12	2.0GHz	4.5GHz	6MB L2 / 8MB L3	AMD Radeon™ 840M	AMD Ryzen™ AI, up to 50 TOPS	Up to 59 TOPS
AMD Ryzen™ AI 5 PRO 340 ^[1]	6	12	2.0GHz	4.8GHz	6MB L2 / 16MB L3	AMD Radeon™ 840M	AMD Ryzen™ AI, up to 50 TOPS	Up to 59 TOPS
AMD Ryzen™ AI 7 345	6	12	2.0GHz	4.6GHz	4MB L2 / 8MB L3	AMD Radeon™ 820M	AMD Ryzen™ AI, up to 50 TOPS	Up to 56 TOPS
AMD Ryzen™ AI 7 445	6	12	2.0GHz	4.6GHz	6MB L2 / 8MB L3	AMD Radeon™ 840M	AMD Ryzen™ AI, up to 50 TOPS	Up to 59 TOPS
AMD Ryzen™ AI 7 450	8	16	2.0GHz	5.1GHz	8MB L2 / 16MB L3	AMD Radeon™ 860M	AMD Ryzen™ AI, up to 50 TOPS	Up to 66 TOPS

Notes:

[1] AMD Ryzen™ AI 5 PRO 340 is for special bid only.

AI (Artificial Intelligence)

AI PC Category

Copilot+ PC^[1]

NPU

Integrated AMD Ryzen™ AI, up to 50 TOPS

Notes:

[1] Copilot+ PCs have at least 16GB RAM, 256GB storage, and a NPU that runs 40+ TOPs to run the latest AI tools build-in latest Windows® 11 to accelerate productivity and creativity.

Operating System

Operating System**

- Windows® 11 Pro
- Windows® 11 Home
- Ubuntu Linux^[1]
- No preload operating system

Notes:

[1] Some features may not be supported on the system with Linux preload, including but not limited to Intel® RST RAID, MIPI computer vision camera, WWAN, Human Presence Detection, etc.

Graphics

Graphics**

Graphics	Type	Memory	Key Features
AMD Radeon™ 820M	Integrated	Shared	DirectX® 12
AMD Radeon™ 840M	Integrated	Shared	DirectX® 12

AMD Radeon™ 860M	Integrated	Shared	DirectX® 12
------------------	------------	--------	-------------

Monitor Support

Monitor Support^[1]

Supports up to 4 independent displays (native display and 3 external monitors via HDMI® and USB4®)

- HDMI® supports up to 4096x2160@60Hz
- USB4® supports up to 7680x4320@60Hz^[2]

Notes:

[1] Refresh rates >60hz also supported, however max resolution will be limited.

[2] 8K resolution support needs 2 display pipes. That is, simultaneous display number will “-1” when 8K resolution displayed.

Chipset

Chipset

AMD SoC (System on Chip) platform

Memory

Max Memory^[1]

Up to 64GB DDR5-5600

Memory Slots

Two DDR5 SODIMM slots, dual-channel capable

Memory Type

DDR5-5600

Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.

Storage

Max Storage Support^[1]

Up to two drives, 2x M.2 SSD

- M.2 2242 SSD up to 1TB
- M.2 2280 SSD up to 1TB

Storage Slot^[2]

Two M.2 slots

- One M.2 2242 PCIe® 4.0 x4 slot
- One M.2 2280 PCIe® 4.0 x4 slot

Storage Type

Disk Type	Interface	Offering	Security
M.2 2242 SSD	PCIe® NVMe®, PCIe® 4.0 x4	256GB / 512GB / 1TB	Opal 2.0
M.2 2242 SSD	PCIe® NVMe®, PCIe® 4.0 x4	512GB / 1TB	-

Notes:

[1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.

[2] The actual data transfer rate of the following PCIe® interface also depends on the capabilities of the connected PCIe® device. The listed values represent theoretical maximums.

PCIe® 3.0 (x2 / x4): 2 GB/s (16 Gbps) / 4 GB/s (32 Gbps);
 PCIe® 4.0 (x2 / x4): 4 GB/s (32 Gbps) / 8 GB/s (64 Gbps);
 PCIe® 5.0 (x2 / x4): 8 GB/s (64 Gbps) / 16 GB/s (128 Gbps).

Removable Storage

Card Reader

No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Senary SN6147 codec

Speakers

Stereo speakers, 2W x2, Dolby Atmos®, audio by HARMAN

Microphone

Dual-microphone array, 360° far-field, smart noise-cancelling

Camera**

- 5.0MP, with privacy shutter, fixed focus, temporal noise reduction
- FHD 1080p + IR hybrid, with privacy shutter, fixed focus, temporal noise reduction
- HD 720p, with privacy shutter, fixed focus

Battery

Battery**

- 48Wh Rechargeable Li-ion Battery, supports Rapid Charge Pro (charge up to 50% in 30min)^[1]
- 64Wh Rechargeable Li-ion Battery, supports Rapid Charge (charge up to 80% in 1hr)^[2]

Battery Life^[3]

Configuration 1 (max battery life)

MobileMark® 30: up to 14.86 hr with 974 performance score @250nits

JEITA-BAT 3.0 (Video/Idle): up to 14.76 hr / 24.06 hr @200nits

Local video playback: up to 22.53 hr @150nits

Alternate configuration 2

MobileMark® 30: up to 14.23 hr with 975 performance score @250nits

JEITA-BAT 3.0 (Video/Idle): up to 13.75 hr / 23.61 hr @200nits

Local video playback: up to 22.3 hr @150nits

Alternate configuration 3

MobileMark® 30: up to 13.58 hr with 1014 performance score @250nits

JEITA-BAT 3.0 (Video/Idle): up to 14.35 hr / 22.45 hr @200nits

Local video playback: up to 23.03 hr @150nits

Notes:

[1], [2] Rapid charge is only guaranteed when the computer is turned off or in standby mode or in hibernation mode. When the computer is powered on, the Charge Time will vary depending on system power consumption and AC adapter power.

[3] Configuration 1: WUXGA (non-touch), AMD Ryzen™ AI 7 445, 16GB DDR5, Win 11, 64Wh battery, best power efficiency power mode

Configuration 2: WUXGA (non-touch), AMD Ryzen™ AI 7 345, 16GB DDR5, Win 11, 64Wh battery, best power efficiency power mode

Configuration 3: WUXGA (non-touch), AMD Ryzen™ AI 7 450, 16GB DDR5, Win 11, 64Wh battery, best power efficiency power mode

All battery life claims are approximate maximum and based on results using [MobileMark® 30](#), JEITA 3.0, continuous 1080p local video playback (using default Media Player in Fullscreen mode with 150nits brightness and default volume level). Actual battery life will vary and depends on many factors such as product configuration, software, wireless functionality, power management settings, and screen brightness.

The maximum capacity of the battery will decrease with time, ambient temperature and use. Refer to [Microsoft® link](#) for more information about the Windows® Performance power slider.

Power Adapter

Power Adapter**^[1]

- 65W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® slim (2-pin, wall-mount) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- No power adapter

Notes:

[1] AC adapter offerings depend on the country.

DESIGN

Display

Display**

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Refresh Rate	Viewing Angle (L/R/U/D)	Key Features
16"	WUXGA (1920x1200)	Non-touch	IPS ^[1]	400nits	Anti-glare	16:10	1000:1	45% NTSC	60Hz	89° / 89° / 89° / 89°	AICCP color calibration, TÜV Rheinland® Low Blue Light (Software Solution)
16"	WUXGA (1920x1200)	In-cell touch	IPS ^[2]	400nits	Anti-glare	16:10	1200:1	100% sRGB	120Hz VRR	89° / 89° / 89° / 89°	TÜV Rheinland® Low Blue Light (Hardware Solution)
16"	WQXGA (2560x1600)	Non-touch	IPS ^[3]	400nits	Anti-glare	16:10	1200:1	100% sRGB	120Hz VRR	89° / 89° / 89° / 89°	Eyesafe® Certified 2.0

Touchscreen

- In-cell multi-touch, supports 10-point touch
- Non-touch

Screen-to-Body Ratio

90.7%

Color Calibration

- AICCP color calibration (selected WUXGA display)
- No color calibration

Notes:

[1], [2], [3] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

Input Device

Pen

No support

Keyboard

6-row, spill-resistant, multimedia Fn keys, numeric keypad, key travel 1.5mm / 1.35mm (Fn row & G/H/B), Copilot key

Keyboard Backlight

- LED backlight
- Non-backlight

UltraNav™

TrackPoint® pointing device, double-tap to open the TrackPoint® Quick Menu
Mylar® surface multi-touch 3-button Trackpad, 67 x 115 mm (2.64 x 4.53 inches)

Mechanical

Dimensions (WxDxH)^[1]

Models	Dimensions
Models with aluminium (top) and aluminium (bottom)	356 x 249 x 10.1/17.05 (front/rear), 21.15 (maximum) mm; 14.01 x 9.80 x 0.40/0.67 (front/rear), 0.83 (maximum) inches
Models with aluminium (top) and PC-ABS (bottom)	356 x 249 x 10.1/17.05 (front/rear), 21.95 (maximum) mm; 14.01 x 9.8 x 0.40/0.67 (front/rear), 0.86 (maximum) inches

Weight^[2]

Starting at 1.63 kg (3.59 lbs)

Case Color

Black

Case Material**

- Aluminium (top), PC-ABS (bottom)
- Aluminium (top), aluminium (bottom)

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Network

WLAN + Bluetooth®**[1]

- Wi-Fi® 7, 802.11be 2x2 Wi-Fi® + Bluetooth® 5.4, M.2 card
- MediaTek Wi-Fi® 7 MT7925, 802.11be 2x2 Wi-Fi® + Bluetooth® 5.4, M.2 card
- Realtek® Wi-Fi® 7 RTL8922AE, 802.11be 2x2 Wi-Fi® + Bluetooth® 5.4, M.2 card

WWAN

No support

SIM Card

No physical SIM card inbox

Ethernet

Gigabit Ethernet, 1x RJ-45, supports Wake-on-LAN

NFC

No support

Notes:

[1] Wi-Fi® operation (including Wi-Fi® 6, Wi-Fi® 6E, Wi-Fi® 7, etc.) is subject to the regulatory requirements of each country. Bluetooth® may operate at a lower version than hardware design depending on the factors such as operating system, driver, etc.

Ports^[1]

Standard Ports

- 1x USB-A (USB 5Gbps)
- 1x USB-A (USB 10Gbps), Always On
- 2x USB-C® (USB4® 40Gbps), with USB PD 15-65W and DisplayPort™ 1.4a
- 1x HDMI® 2.1, up to 4K/60Hz
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Ethernet (RJ-45)

Notes:

[1] The transfer speed of the ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

Docking

Docking

Various docking solutions supported via USB-C®.

For more compatible docking solutions, please visit [Docking for ThinkPad® E16 Gen 4 \(AMD\)](#)

SECURITY & PRIVACY

Security

ThinkShield

ThinkShield is a comprehensive security solution that encompasses hardware, software, and supply chain components. For more details, visit [here](#)

Security Chip

Discrete TPM 2.0, TCG certified, FIPS 140-3 certified

Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

Smart Card Reader

No smart card reader

Fingerprint Reader

- Touch style fingerprint reader integrated in power button, match-on-chip
- No fingerprint reader

BIOS Security

- Certificate-based BIOS authentication
- FIDO (Fast Identity Online) authentication
- NVMe® password
- Power-on password
- Supervisor password
- System management password
- Self-healing BIOS
- More BIOS security features, please visit [BIOS Simulator](#)

Other Security

- Camera privacy shutter
- (Optional) IR camera for Windows® Hello (facial recognition)

MANAGEABILITY

System Management

System Management

Non-DASH

SERVICE

Warranty

Base Warranty**

- 1-year mail-in service
- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 1-year limited onsite service
- No base warranty

ACCESSORIES

Bundled Accessories

Bundled Accessories^[1]

None

Notes:

[1] For more compatible accessory solutions, please visit [Accessories for ThinkPad® E16 Gen 4 \(AMD\)](#).

OPERATING REQUIREMENTS

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Relative Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

- [1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

ENVIRONMENTAL

Sustainability

Material^[1]

50% recycled aluminium on top cover
50% PCC recycled plastic used in display panel frame
50% recycled aluminium on metal bottom cover
50% PCC recycled plastic used in PC-ABS bottom cover
90% PCC recycled plastic used in battery pack enclosure
85% PCC recycled plastic used in key caps (backlight)
70% PCC recycled plastic used in key caps (non-backlight)
90% PCC recycled plastic used in speaker enclosure
90% PCC recycled plastic used in standard 65W adapter
FSC carton and accessory box
Bamboo fiber NB bag and screen sheet
Paper cushion and sealing label

Notes:

- [1] PCC: Post Consumer Content, recycled materials from customers.

CERTIFICATIONS

Green Certifications^[1]

Green Certifications^[2]

- ENERGY STAR® 9.0
- EPEAT™ Gold Registered^[3]
- ErP Lot 6/26
- RoHS compliant
- TCO Certified, generation 10

Notes:

- [1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

- [2] EPEAT™ registration and ENERGY STAR® certification are optional and only available on the models with preloaded OS. Please visit epeat.net and energystar.gov for more information.

- [3] EPEAT™ is registered where applicable, please visit epeat.net for registration status by country.

Other Certifications

Mil-Spec Test

Work in progress

Other Certifications

- (Optional) Eyesafe® Certified 2.0
- (Optional) TÜV Rheinland® Low Blue Light (Hardware Solution)
- (Optional) TÜV Rheinland® Low Blue Light (Software Solution)

- Feature with ** means that only one option listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.

- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS", WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES

OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.

- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



AMD



AMD



AMD



AMD



AMD



AMD