


# 1-Port RS232 Serial Adapter Card with 16950 UART

Product ID: PEX1S953LP

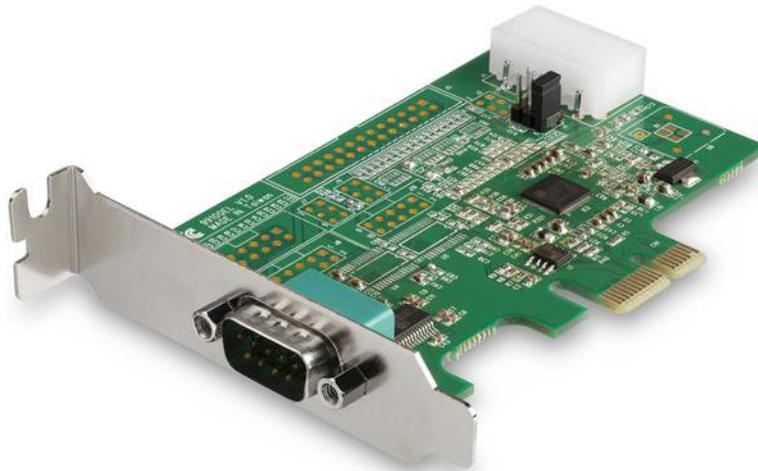

This RS232 Serial Adapter Card lets you add an RS232 DB9 serial port to your computer through a PCI Express (PCIe) slot. It enables you to interact with serial devices such as card readers, printers, PIN pads, and modems, at speeds of up-to 921.4Kbps.

## Maximum Compatibility

With broad OS support, including for Windows and Linux, this PCI Express card is easy to integrate into mixed environments. The card comes pre-configured with a low-profile bracket, and includes an optional full-profile bracket, so installation is easy regardless of the case form factor.

## Experience Optimal Technology

This PCIe to serial adapter supports the following features:

- Compatible with industry standard 16950 UART
- Supports max baud rate of up-to 921.4Kbps
- Provides 5/12V power output on Pin 9 when external power is connected
- 128-byte depth FIFO per transmitter and receiver

- Supports 9, 8, 7, 6, 5 data bits
- Asix AX99100 chipset
- PCI Express 1.1 compliant

PEX1S953LP is backed by a StarTech.com lifetime warranty and free lifetime technical support.

### Certifications, Reports and Compatibility



### Applications

- Install in home or office workstations
- Connect in retail POS applications
- Connect to automated self-service kiosks or ATM machines
- Interact with RS232 serial devices like card readers or printers

### Features

- Add RS232 DB9 capabilities without purchasing a new server or computer
- PCI Express 1.1 compliant ensuring a reliable performance
- Maximize case form factor integration with a low-profile or full-profile bracket
- High-speed data transfer rates of up to 921.4Kbps
- Supports 256-byte depth FIFO per transmitter and receiver

<b>Hardware</b>	Warranty	Lifetime
	Bus Type	PCI Express
	Card Type	Low Profile (SP bracket incl.)
	Chipset ID	Asix AX99100
	Interface	Serial
	Port Style	Integrated on Card
	Ports	1
<b>Performance</b>	Data Bits	5, 6, 7, 8, 9
	FIFO	256 Bytes
	Flow Control	None, Xon/Xoff, RTS/CTS
	Max Baud Rate	921.6 Kbps
	Parity	None, Odd, Even, Space, Mark
	Serial Protocol	RS-232
	Stop Bits	1, 1.5, 2
<b>Connector(s)</b>	Connector Type(s)	1 - PCI Express x1 Male
	External Ports	1 - DB-9 (9 pin, D-Sub) Male
	Internal Ports	1 - LP4 (4 pin; Large Drive Power) Male Input
<b>Software</b>	Microsoft WHQL Certified	Yes
	OS Compatibility	Windows Server® 2003, 2008 R2, 2012, 2012 R2, 2016 Linux 2.4.x to 2.6.x <i>LTS Versions only</i>
<b>Special Notes / Requirements</b>	<b>Note</b>	Selectable power output on pin 9 of the serial port
<b>Environmental</b>	Humidity	20~80% RH
	Operating Temperature	0°C to 70°C (32°F to 158°F)
	Storage Temperature	-20°C to 80°C (-4°F to 176°F)
<b>Physical Characteristics</b>	Product Height	1.8 cm [0.7 in]
	Product Length	98 mm [3.9 in]
	Product Width	67 mm [2.6 in]
	Weight of Product	46.2 g [1.6 oz]
<b>Packaging Information</b>	Package Height	30 mm [1.2 in]
	Package Length	17 cm [6.7 in]

	Package Width	14.2 cm [5.6 in]
	Shipping (Package) Weight	124.6 g [4.4 oz]
<b>What's in the Box</b>	Included in Package	1 - PCIe Serial Card 1 - Full-Profile Bracket 1 - User Manual

Product appearance and specifications are subject to change without notice.