

Philips Curved Business  
Monitor  
32:9 SuperWide curved  
monitor with USB-C

### 6000 series

45 (44.5" / 113 cm diag.)  
5120 x 1440 (Dual QHD)

45B1U6900CH



## Beyond well-equipped

with a pop-up webcam

This USB-C monitor is for data transfer, power delivery and watching videos. The integrated 5 MP webcam delivers sharp images, and the noise cancelling mic lets people hear you fine. Windows Hello Webcam for quick access and strong security.

#### Single cable USB-C connection

- RJ-45 to USB-C gives easy network connection with security
- USB 3.2 high-speed data transfer

#### Superb Picture Quality

- VA display delivers awesome images with wide viewing angles
- DisplayHDR 400 for more lifelike and outstanding visuals

#### Designed for the way you work

- Curved display design for a more immersive experience
- 32:9 SuperWide screen designed to replace multiscreen setups
- Built-in KVM switch to easily switch between sources
- Webcam with noise-cancelling microphone for collaboration
- Tilt, swivel and height-adjust for an ideal viewing position
- Eyesafe-certified blue light protection and colour accuracy

#### Designed for sustainability

- PowerSensor saves up to 80% energy costs



# PHILIPS

# Highlights

## USB-C Docking with RJ45



Simplify all peripherals from monitor to PC using one-cable docking USB Type-C connector, including networking, high-resolution video output from PC to monitor, and surfing on the Internet without an additional network cable, even without a LAN port on your notebook. RJ45 connection through USB-C offers a fast and secure connection when needed. Getting the fastest data speeds allows you to transfer data from a HDD to your PC faster than ever. Additionally, USB-C with power delivery can even enable you to power and charge your notebook from the monitor, eliminating the need for extra power cables.

## DisplayHDR 400




VESA-certified DisplayHDR 400 delivers a significant step up from normal SDR displays. Unlike, other "HDR-compatible" screens, true DisplayHDR 400 produces astonishing brightness, contrast and colours. With global dimming and peak brightness up to 400 nits, images come to life with notable highlights while featuring deeper, more nuanced blacks. It renders a fuller palette of rich new colours, delivering a visual experience that engages your senses.

## Curved display design



Desktop monitors offer a personal user experience, which suits a curved design very well. The curved screen provides a pleasant yet subtle immersion effect, which focuses on you at the centre of your desk.

## 32:9 SuperWide

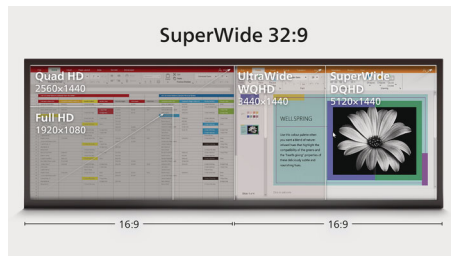

32:9 SuperWide 49" screen with 5120 x 1440 resolution is designed to replace multiscreen setups for a massive wide view. It's like having two 27" 16:9 Quad HD displays side by side. SuperWide monitors offer the screen area of dual monitors without the complicated setup.

## MultiClient Integrated KVM




With the MultiClient Integrated KVM switch, you can control two separate PCs with one monitor-keyboard-mouse setup. A convenient button allows you to quickly switch between sources. Handy with setups that require dual PC computing power or sharing one large monitor to show two different PCs.

## Webcam and noise-cancelling mic



This Philips monitor comes with a built-in 5 MP webcam, a noise-cancelling microphone, and speakers, making it perfect for working from home and collaborating remotely. The webcam is certified for Windows Hello and is equipped with advanced sensors for Windows Hello™ facial recognition, which conveniently logs you into your Windows devices in less than 2 seconds. The physical camera switch offers extra privacy when not in use. The noise-cancelling microphone and dual 5 watt integrated speakers deliver clear communications.

## PowerSensor

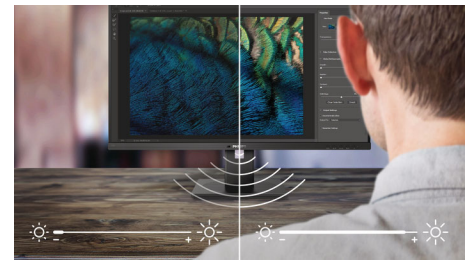

PowerSensor is a built-in 'people sensor' that transmits and receives harmless infrared signals to determine if the user is present and then automatically reduces monitor brightness when then user steps away from the desk, cutting energy costs by up to 80 percent and prolonging monitor life

## TUV Rheinland Eyesafe

Philips display meets the TUV Rheinland Eyesafe® standard to truly protect you from long exposure to blue light. The always-on blue light filter not only helps reduce digital eye strain, but also guarantees colour integrity.



# Specifications

## Picture/Display

- LCD panel type: VA LCD
- Backlight type: W-LED system
- Panel Size: 44.5 inch / 113 cm
- Display Screen Coating: Anti-Glare, 2H, Haze 25%
- Effective viewing area: 1087.488 (H) x 305.856 (V) - at a 1500R curvature\*
- Aspect ratio: 32:9
- Maximum resolution: 5120 x 1440 @ 75 Hz
- Pixel Density: 120 PPI
- Response time (typical): 4 ms (Grey to Grey)\*
- Brightness: 450 cd/m<sup>2</sup>
- Contrast ratio (typical): 3000:1
- SmartContrast: 80,000,000:1
- Pixel pitch: 0.2124 x 0.2124 mm
- Viewing angle: 178° (H)/178° (V), @ C/R > 10
- Flicker-free
- Picture enhancement: SmartImage
- Display colours: 16.7 M (8 bit)
- Colour gamut (typical): NTSC 107%\*, sRGB 123%\*
- HDR: DisplayHDR 400 certified
- Scanning Frequency: 30–114 kHz (H)/48–75 Hz (V)
- SmartUniformity: 93 ~ 105%
- Delta E: < 2
- sRGB
- LowBlue Mode
- EasyRead
- Adaptive sync

## Connectivity

- Signal Input: HDMI 2.0 x 2, DisplayPort 1.4 x 1, USB-C x 2 (upstream, DP Alt mode, Data, PD up to 100 W)
- HDCP: HDCP 1.4 (HDMI/DisplayPort/USB-C), HDCP 2.2 (HDMI/DisplayPort/USB-C)
- HBR3: HBR3 (USB-C/DisplayPort)
- USB Hub: USB 3.2 Gen 2 / 10 Gbps, USB-A downstream x 4 (with 1 for fast charge B.C 1.2), USB-C downstream x 1 (Data, PD 15 W)
- Audio (In/Out): Audio out/Microphone in combo jack
- RJ45: Ethernet LAN up to 1 G\*, Wake on LAN
- Sync Input: Separate Sync

## Power Delivery

- Version: USB PD version 3.0
- Max power delivery: Up to 100 W\* (5 V/3 A, 7 V/3 A, 9 V/3 A, 10 V/3 A, 12 V/3 A, 15 V/3 A, 20 V/4.8 A)

## Convenience

- Built-in Speakers: 5 W x 2
- Built-in webcam: Pop-up 5.0 megapixel camera with a microphone and LED indicator (for Windows Hello)
- Noise cancellation
- MultiView: PIP/PBP mode, 2 x devices
- KVM: Yes (USB-C/USB-C)
- User convenience: Mic, SmartImage, Input, User, Menu, Power On/Off
- Control software: SmartControl
- OSD Languages: Brazil Portuguese, Czech, Dutch, English, French, Finnish, German, Greek,

- Hungarian, Italian, Japanese, Korean, Portuguese, Polish, Russian, Simplified Chinese, Spanish, Swedish, Traditional Chinese, Turkish, Ukrainian
- Other convenience: Kensington lock, Earphone hook, VESA mount (100 x 100 mm)
- Plug and Play Compatibility: DDC/CI, Mac OS X, sRGB, Windows 11/10/8.1/8

## Stand

- Height adjustment: 150 mm
- Swivel: -/+45 degree
- Tilt: -5/15 degree

## Power

- ECO mode: 39.4 W (typ.)
- On mode: 46.3 W (typ.) (EnergyStar test method)
- Standby mode: 0.3 W (typ.)
- Off mode: Zero watts with AC switch
- Energy Label Class: G
- Power LED indicator: Operation - White, Standby mode - White (flashing)
- Power supply: Built-in, 100–240 VAC, 50–60 Hz

## Dimensions

- Product with stand (max height): 1085 x 515 x 238 mm
- Product without stand (mm): 1085 x 337 x 158 mm
- Packaging in mm (W x H x D): 1180 x 235 x 535 mm

## Weight

- Product with stand (kg): 12.96 kg
- Product without stand (kg): 9.90 kg
- Product with packaging (kg): 17.26 kg

## Operating conditions

- Temperature range (operation): 0°C to 40 °C
- Temperature range (storage): -20°C to 60 °C
- Relative humidity: 20%-80 %
- Altitude: Operation: +12,000 ft (3658 m), Non-operation: +40,000 ft (12,192 m)
- MTBF (demonstrated): 70,000 hrs (excluded backlight)

## Sustainability

- Environmental and energy: PowerSensor, LightSensor, EnergyStar 8.0, EPEAT\*, RoHS, TCO Certified Edge
- Recyclable packaging material: 100 %
- Post-consumer recycled plastic: 85%
- Specific Substances: Mercury free, PVC/BFR free housing

## Compliance and standards

- Regulatory Approvals: CB, CE Mark, FCC Class B, ICES-003, CU-EAC, EAEU RoHS, TUV Ergo, TUV/GS, TUV Eyesafe certified, cETLus

## Cabinet

- Front bezel: Black
- Rear cover: Black
- Foot: Black
- Finish: Texture

## What's in the box?

- Monitor with stand
- Cables: HDMI cable, DisplayPort cable, USB-C to C/A Y cable, Power cable
- User Documentation



Issue date 2023-02-08

Version: 2.2.3

12 NC: 8670 001 85669  
EAN: 87 12581 79743 0

© 2023 Koninklijke Philips N.V.  
All Rights reserved.

Specifications are subject to change without notice.  
Trademarks are the property of Koninklijke Philips N.V.  
or their respective owners.

[www.philips.com](http://www.philips.com)

\* Radius of the arc of the display curvature in mm

\* Response time value equal to SmartResponse

\* NTSC Area based on CIE 1976

\* sRGB Area based on CIE1931

\* For Video transmission via USB-C, your Notebook/device must support USB-C DP Alt mode

\* Activities such as screen sharing and online streaming over the Internet can impact your network performance. Your hardware and network bandwidth will determine the overall audio and video quality.

\* For USB-C power and charging function, your Notebook/device must support USB-C standard Power Delivery specifications. Please check with your Notebook user manual or manufacturer for more details.

\* If your Ethernet connection seems slow, please enter the OSD menu and select USB 3.0 or a higher version that can support the LAN speed up to 1G.

\* The USB-C power delivery of this display is up to 100 W (96 W in typical). The maximum power delivery will depend on your device.

\* When calculating energy costs saving from PowerSensor, both USB and Power delivery are excluded.

\* EPEAT rating is valid only where Philips registers the product. Please visit <https://www.epeat.net/> for registration status in your country.

\* The monitor may look different from feature images.