


LED desk lamp MAULatlantic

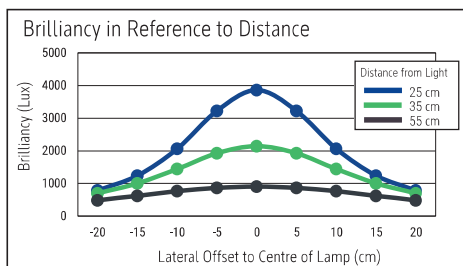

- **Head and cooling element specially adapted to the LED operation**
- **Intertek GS-label for checked safety**
- **Extremely economical: Latest LED technology**
- **Discreet: Long head and filigree designed parallelogram arm fit discreetly in any office environment**
- **Three dimensional adjustment of the lamp head**
- **Technical safety concept Made by MAUL**
- Reflector for optimal light distribution
- Protection rating IP20
- Light source and operating device replaceable by an electrician
- Recyclable packaging

Illuminance of the : 2.140 lux illuminance at 35 cm distance
 Colour temperature per light source: 6.500 Kelvin (daylight white)
 Number of light sources: 1
 Energy efficiency class per light source: D (spectrum A to G)
 Weighted energy consumption per light source: 6 kWh/1000 h
 Service life L70B50 per light source: 10.000 h
 Useful luminous flux per light source: 860 lm
 Material: Head: plastic - Arm: metal
 Dimensions: Head: 33 x 7 cm
 Movement: Head: inclinable, rotatable
 Position of the switch: Lamp head

- Metal clamp with desk protection (max. clamping width 5,5 cm). Lower arm length: 33 cm, upper arm length: 34 cm. Height 38 cm. Arm: Inclinable, rotatable
- Guarantee: 2 years

Art. No.	Colour	EAN-Code	Tariff-No.	Base	Cable length (approx.)	Protection class	Pack size / PU	Weight (incl. packaging)	PU
8203502	white	4002390055291	94052140	clamp	1.80 m	II europlug	45 x 20 x 6 cm	0.963 kg	1 pc(s).
8203590	black	4002390055314	94052140	clamp	1.80 m	II europlug	45 x 20 x 6 cm	0.963 kg	1 pc(s).
8203595	silver	4002390057189	94052140	clamp	1.80 m	II europlug	45 x 20 x 6 cm	0.963 kg	1 pc(s).