

## Open Frame





## 15.6" Open Frame Display Commercial Grade **DT15VW3-O**

#### The features:

- 15.6", 1920 x 1080 resolutions
- 300nits, PCAP multi-touch panel
- IP65 dust- and waterproof grade in front panel
- Anti-fingerprint coating glass panel
- Tempered safety glass
- IK08 Impact Protection\*
- Quality panel for landscape, portrait mode
- VESA mounting holes 75 x 75 mm

\*IKO8 rated products are protected against 5 joules of impact. This is the equivalent of a 1.7kg mass being dropped from 300mm above the protect.

#### **Self-Service Kiosk**



#### **Industrial Monitor**



#### **Smart Locker**



EMC and DoC









## DT15VW3-O

#### **Dimensions**

Front View

Unit: mm

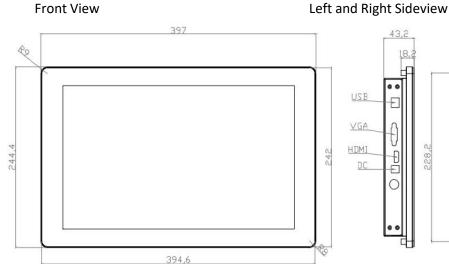



**Rear View** 

# **Top View** 366,2 394,6

### **Specifications**

DT15VW3-O			
Chassis	Mechanical Design	Metal with implanted IP design	
	Dimension (W x H x D)	397 x 244.2 x 43.2 mm	
Thermal Solution		Fanless technology	
Panel	Resolution	15.6", 16:9, 1920 x 1080, 60Hz	
	Туре	VA	
	Maximum Brightness	300cd/m2	
	Response Time	30ms	
	Contrast Ratio	1000:1	
	View Angle (Horizontal)	85/85	
	View Angle (Vertical)	85/85	
	Backlight	LED backlight	
Touch	Touch Glass	Projected capacitive touch, 15.6 inch, 1.8mm chemically strengthened glass, 7H	
	Touch Controller	10 points touch	
Temper ature	Operation	0°C ~ 50°C (32°F~ 122°F)	
	Storage	-20°C ~ 60°C (-4°F~ 140°F)	
OS of Drive	er Software Support	Windows, Linux and Android	

IP Level		IP65 (front)		
I/O Interface On Rear Site		HDMI type A, USB for touch (5V input from USB host), VGA DB-15 female, RJ45 for OSD remoter, DC-in for adapter		
Net Weight		1.50 Kg		
Mounting	Rear	75 x 75mm VESA mount		
	Side	Mounting brackets on all four sides		
Input Voltage		DC input 12V/3A		
Warranty		3 years		
Environment				
MTBF		30,000hrs demonstrated		
Relative Humidity		90% RH (40°C non-condensing)		
Certification		FCC / CE(Class B) / ROHs		
Packing				
Dimension (Packing)		520 x 340 x 135 mm		
Gross Weight		5.85 Kg		
Accessory In Box		HDMI cable, USB cable, OSD remote, AC cable, Adapter, Side mount bracket x8, M4 screws x16, M3 screws x16		
*Please note that product specifications are subject to change without notice				

<sup>\*</sup>Please note that product specifications are subject to change without notice



**AOPEN Headquarter** New Taipei City, Taiwan

**AOPEN America** San Jose, USA

**AOPEN Europe** Rosmalen, Netherland

**AOPEN Australia** Melbourne, Australia

**AOPEN Japan** Tokyo, Japan

**AOPEN China** Shanghai, China