


Enhanced BZ35P

85"	75"	65"
55"	50"	43"

500cd/m² | 25% Haze

4K professional display with unique DBNG Standard enhanced with IP5X rating and brightness for optimal viewing in various environments.

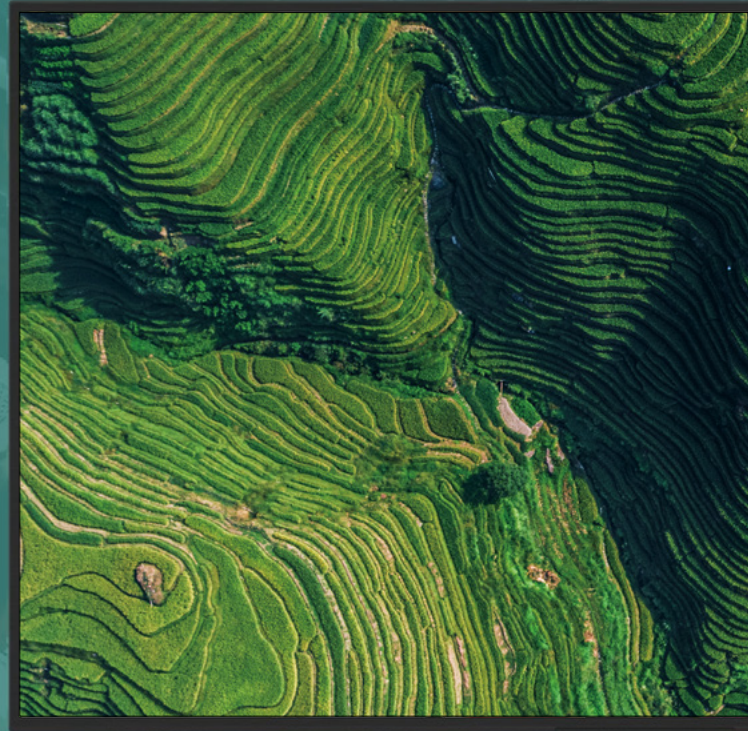

Deep Black Non-Glare
Standard



Deep Black Non-Glare Standard

DBNG
Standard

Combines a high-haze (25%), glare-reducing coating with advanced contrast processing powered by the XR Processor. Reflections are suppressed to deliver high-contrast visual performance.



Conventional display



High Haze Coating minimises glare



XR Processor with AI Scene Recognition further enhances contrast, delivering even greater visibility

Slim, dust-resistant (IP5X-rated) design with flexible installation


The Pro BRAVIA BZ35P Series features a slim 47mm* chassis with narrow bezels for a clean, modern look. Its IP5X-rated housing ensures dust resistance, while the centrally positioned VESA pattern offers flexible horizontal or vertical installation for signage and other applications.

*For models up to 65"



Lower power consumption

Thanks to an efficient new optical system and intelligent backlight control that works with the XR Processor's AI scene recognition, power consumption is reduction of approx 30% compared to previous models.

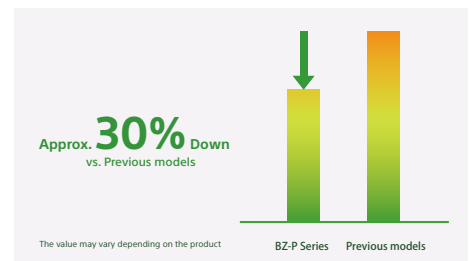

BZ35P Series Specifications

Enhanced						
Series	BZ35P					
Model	FW-85BZ35P	FW-75BZ35P	FW-65BZ35P	FW-55BZ35P	FW-50BZ35P	FW-43BZ35P
Screen Size	85"	75"	65"	55"	50"	43"
Brightness (cd/m ²)	500					
Display Resolution (HxV, pixels)	3,840 x 2,160					
Deep Black Non-Glare	Deep Black Non-Glare Standard					
Haze	25%					
Picture Processor	XR Processor					
Color Gamut (DCI-P3)	92%					
Viewing Angle (H/V)	178°/178° (CR >10)					
Panel Type	VA	IPS			VA	IPS
Backlight Type	Direct LED			Edge LED		
Response Time (Gray to gray, Typical, ms)	8				6	8
Video/Audio Input	HDMI x4 (HDCP2.3)					
Video/Audio Output	-					
Headphone Out	YES (x1)					
Terminals for Control	USB x2, RJ45 (Ethernet) x1, RS-232C x1					
Wi-Fi	YES					
Bluetooth	YES					
Operating System	Android					
Real-Time Clock	YES					
Internal Memory	32GB*1					
Control Protocols	IP Control, RS232C Control, HDMI-CEC					
HDMI Signal	4096x2160p(24,50,60Hz), 3840x2160p(24,25,30,50,60Hz), 1080p(24,30,50,60Hz), 1080i(50,60Hz), 720p(24,30,50,60Hz), 576p, 480p					
USB Playback Codecs	MPEG1:MPEG1 / MPEG2PS:MPEG2 / MPEG2TS(HDV,AVCHD):MPEG2,AVC / MP4(XAVC S):AVC,MPEG4,HEVC / AVI,MotionJpeg / MOV:AVC,MPEG4,MotionJpeg / MKV,AVC,MPEG4,VP8.HEVC / WEBM:VP8 / 3GPP:MPEG4,AVC / MP3 / ASF(WMA) / LPCM / WAV / MP4AAC / FLAC / JPEG					
Speaker	20W					
Operation Temperature	0°C - 40°C					
Storage Temperature	-20°C - 60°C					
Power Requirement	AC 220V-240V, 50Hz					
Power Consumption (Rated)	252W	191W	136W	110W	97W	94W
Power Consumption (On-Mode, EPREL)	113 kWh/1000h	94 kWh/1000h	67 kWh/1000h	56 kWh/1000h	54 kWh/1000h	50 kWh/1000h
Power Consumption (in Standby)	0.5W					
IP Rating (Dust Resistant)	IP5X					
Operation Time	24 / 7					
Orientation	Landscape/Portrait					
Tilt	Yes*2					
EMC*3	Class-B					
Environmental Certification	ENERGY STAR*5 and EPEAT*4					
VESA® Hole Pitch (W x H)	400 x 400 mm	300 x 300 mm			200 x 200 mm	
Set Dimensions (W x H x D)	1910 x 1091 x 73 mm	1684 x 962 x 72 mm	1459 x 834 x 47 mm	1240 x 711 x 47 mm	1126 x 647 x 47 mm	972 x 560 x 47 mm
Set Weight	41.5 kg	29.2 kg	23 kg	17.3 kg	11.5 kg	8.9 kg
Package Dimensions (W x H x D)	2045 x 1242 x 238 mm	1812 x 1118 x 189 mm	1593 x 972 x 163 mm	1357 x 838 x 143 mm	1228 x 774 x 133 mm	1070 x 680 x 132 mm
Package Weight	55 kg	39 kg	30 kg	23 kg	16 kg	12 kg

*1 Includes storage used by the operating system.

*2 Please refer to the manual for allowable installation angles.

*3 Applicable EMC standards and regulatory requirements vary by country or region.

*4 Certification is underway.

*5 Certifications vary depending on region.

* All dimensions and weights are approximate.