


X600 PRO FULLY RUGGED LAPTOP



- 11th Generation Intel® Core™ i7 / i5 vPro® Processor
- 15.6" FHD LumiBond display with Getac sunlight readable technology (1,000 nits) and optional capacitive touchscreen
- Enhanced enterprise security features with TPM 2.0, Kensington lock, triple user-replaceable storage and Smart card reader
- Versatile I/Os connectivity including Thunderbolt™ 4 and docking solutions
- Optional discrete graphic NVIDIA® Quadro® RTX3000
- Expandable modules for additional ports, batteries, DVD super multi drive, and connectivity



X600 Pro 3D demo

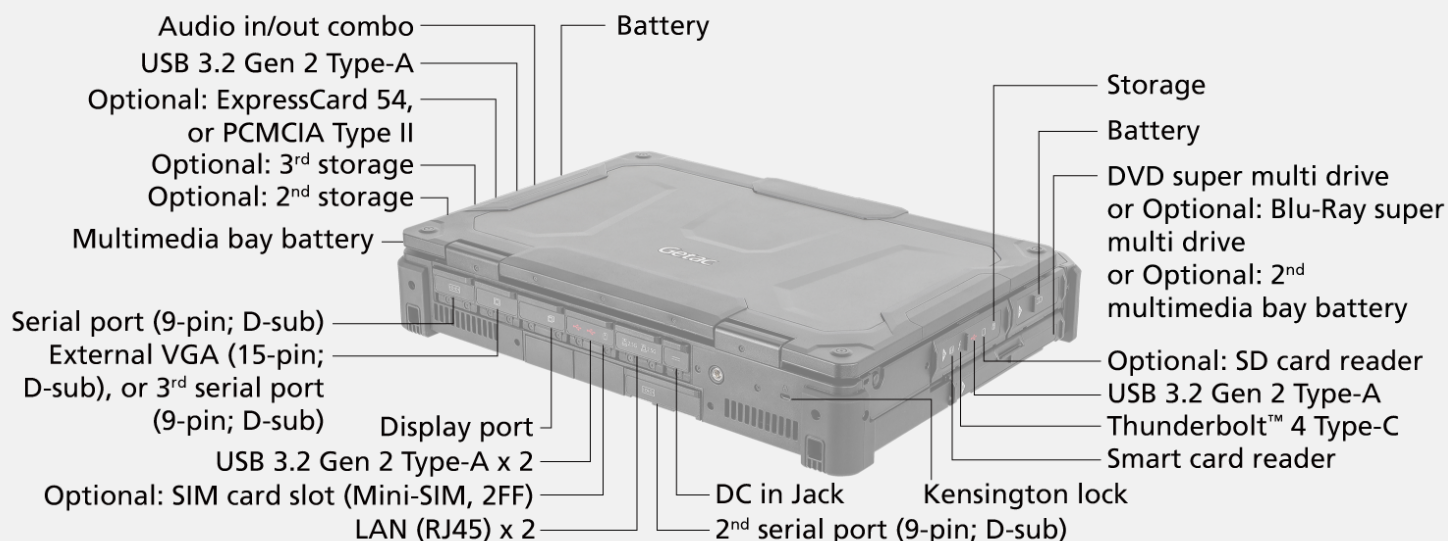

SPECIFICATIONS

Generation

G1

Operating System

Windows 11 Pro

Mobile Computing Platform

Intel® Core™ i5-11500HE vPro® Processor
Max. 4.5GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Platform options:

Intel® Core™ i7-11850HE vPro® Processor
Max. 4.7GHz with Intel® Turbo Boost Technology
- 24MB Intel® Smart Cache

Intel® Xeon® W-11865MRE vPro® Processor
Max. 4.7GHz with Intel® Turbo Boost Technology
- 24 MB Intel® Smart Cache

Graphics

Intel® UHD Graphics
Optional: NVIDIA® Quadro®
RTX3000 6GB discrete graphics controller ^{i, ii, iii}
Optional: NVIDIA® GeForce®
GTX1650 4GB discrete graphics controller ^{i, ii}
Optional: NVIDIA®
RTX™ A4500 16GB discrete graphics controller ^{i, ii, iii}

Display

15.6" TFT LCD FHD (1920 x 1080)
Protection film
1,000 nits LumiBond display
with Getac sunlight readable technology
Optional: Capacitive multi-touch screen

Storage & Memory

16GB DDR4
Optional: 32GB / 64GB / 128GB DDR4

512GB PCIe SSD
Optional: 1TB / 2TB PCIe SSD
Optional 2nd storage: 512GB / 1TB / 2TB PCIe SSD
Optional 3rd storage: 512GB / 1TB / 2TB PCIe SSD

Keyboard

LED backlit membrane keyboard
with integrated numeric keypad

Pointing Device

Touchscreen
- Optional: Capacitive multi-touch screen
Touchpad
- Touchpad with two buttons

Audio

Integrated stereo speakers
Integrated dual-array microphone

Expansion Slot

Smart card reader
Optional: ExpressCard 54 or PCMCIA Type II ^{iv}
Optional: SD card reader

Multimedia Bay

Multimedia bay battery (11.1V, typical 4200mAh;
min. 3980mAh)
DVD super multi drive ^v
Optional: Multimedia bay 2nd battery
(11.1V, typical 4200mAh; min. 3980mAh)
or Blu-Ray super multi drive ^v

I/O Interface

5MP webcam x 1
Thunderbolt™ 4 Type-C x 1 ^{xiii}
USB 3.2 Gen 2 Type-A x 4
LAN (RJ-45) x 2
Audio in/out combo x 1
DC in Jack x 1
HDMI 2.0 x 1
Display port x 1
Docking connector x 1
Serial port (9-pin; D-sub) x 2
External VGA (15-pin; D-sub) x1 or 3rd serial
port (9-pin; D-sub) x 1 ^{vi}
Optional: SIM card slot x 1 (Mini-SIM, 2FF) ^{vii}
Optional: RF antenna pass-through for GPS,
WWAN and WLAN x 1

Communication Interface

2.5GBASE-T Ethernet
Intel® Wi-Fi 6E AX210, 802.11ax
Bluetooth (v5.2) ^{xiii}
Optional: Dedicated GPS with L1/L5 ^{ix}
Optional: 4G LTE mobile broadband
with integrated GPS ^{xii, ix}

Security Feature

TPM 2.0
Kensington lock
Smart card reader
Intel® vPro® Technology
Getac Disk Wipe
Optional: Absolute Persistence®

Power

AC adapter (230W, 100-240VAC, 50/60Hz) ⁱ
Battery (10.8V, typical 6900mAh;
min. 6600mAh) x 2
Multimedia bay battery (11.1V, typical 4200mAh;
min. 3980mAh) x 1
Optional: Multimedia bay 2nd battery
(11.1V, typical 4200mAh; min. 3980mAh) ^v

Dimension (W x D x H) & Weight

412 x 322 x 77.4mm (16.22" x 12.68" x 3.05") ^x
6.05kg (13.34lbs) ^x

Rugged Feature

MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified ^{xi}
Vibration and 4ft (1.2m) drop resistant
Optional: ANSI/UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D)
Optional: Salt fog certified

Environmental Specification

Temperature ^{xii} :
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software

Getac Utility
Getac Geolocation
Optional: Absolute Secure Endpoint

Optional software

Getac VGPS Utility
Absolute Secure Access

Accessories

Battery (10.8V, typical 6900mAh; min. 6600mAh) x 2
Multimedia bay battery (11.1V, typical 4200mAh;
min. 3980mAh) x 1
AC adapter (230W, 100-240VAC, 50/60Hz) ⁱ
Capacitive stylus with tether

Optional:

Backpack
Battery (10.8V, typical 6900mAh; min. 6600mAh)
Multimedia bay battery (11.1V, typical 4200mAh;
min. 3980mAh)
Multi-Bay charger (Dual-Bay)
Multimedia bay DVD super multi drive ^v
Multimedia bay Blu-Ray super multi drive ^v
AC adapter (230W, 100-240VAC, 50/60Hz) ⁱ
Office dock AC adapter (230W, 100-240VAC,
50/60Hz) ⁱ
MIL-STD-461 AC adapter (230W, 100-240VAC) ^{xi}
DC-DC vehicle adapter (230W, 11-32VDC)
Capacitive stylus with tether
Protection film
Vehicle dock
Office dock
Spare SSD kit

Bumper-to-Bumper warranty

Accidents can take your equipment out of
service when you least expect it, especially in a
rugged environment, which can cause costly
equipment downtime.
That is why Getac has introduced accidental
damage as standard under our Bumper-toBumper
warranty, to help minimize your
enterprise IT costs.
Bumper-to-Bumper is your hassle-free
guarantee.
That means you can depend on us to have your
unit back in service within days.

Standard

3 years Bumper-to-Bumper

X600 PRO FULLY
RUGGED LAPTOP

- I. The configuration with a discrete graphic controller requires the 230W AC adapter.
- II. 150W AC adaptor is not applicable with discrete graphic controller nor office dock.
- III. For X600 Pro optional NVIDIA® Quadro® RTX3000, the operating temperature is 0°C to 63°C / 32°F to 145°F.
- IV. ExpressCard 54 and PCMCIA Type II card readers are mutually exclusive.
- V. DVD super multi drive, Blu-Ray super multi drive, and the 2nd multimedia bay battery are mutually exclusive.
- VI. The 3rd Serial port is optional and mutually exclusive with External VGA.
- VII. Units with 4G LTE option comes with an embedded SIM card slot.
- VIII. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- IX. Dedicated GPS and 4G LTE are mutually exclusive options.
- X. Weight and dimensions vary from configurations and optional accessories.
- XI. MIL-STD-461 230W AC adapter sold separately.
- XII. Tested by an independent third-party test lab following MIL-STD-810H.
- XIII. Does not support USB power delivery.

Information provided herewith is for reference only,
available specification shall be subjected to quotation by
request.

	Office Dock	Vehicle Dock
Serial Port	1	1
External VGA	1	1
Microphone	1	-
Audio Output	1	-
DC in Jack	1	1
USB	5	6
LAN	2	2
HDMI	1	1
Display port	1	1
RF Antenna Connector	-	1 (GPS, WWAN, WLAN)
Kensintonlock	1	1



Getac (UK) Ltd.

Getac House, Stafford Park 12, Telford,
Shropshire TF3 3BJ, United Kingdom
Tel : +44 (0) 1952 207 222
Sales-Getac-UK@getac.com |
www.getac.com/en/

Copyright © 2026 Getac Technology Corporation
and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference
only,available specification shall be subjected to
quotation by request.