
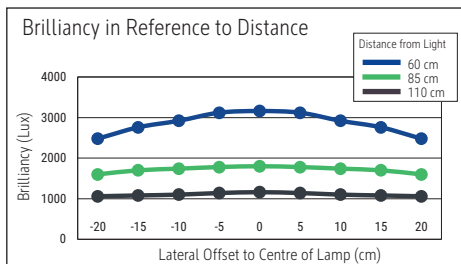


LED floor lamp MAULjava, dimmable



- **Continuously adjustable dimmer depending on the task and individual needs**
- **Comfortable for everyone: Combined direct/indirect workstation lighting**
- **Approx. 50% light directed upward and approx. 50% downward**
- **Dual benefit: Direct light for the work surface and indirect light for general room illumination**
- **Enclosed lamp head**
- **Zero power consumption when switched off via the on/off switch**
- **GS mark, Technical Safety Concept Made by MAUL**
- Glare control with UGR <19 for fatigue-free viewing
- Practical: Diffuser for minimal shadow casting
- Switzerland: Also available with an adapter. Please add the abbreviation .CH to the item number
- IP20 protection rating
- Light source and ballast can be replaced by a qualified electrician

Illuminance of the : indirect: 2.520 lux illuminance at 85 cm distance, 1.560 lux illuminance at 110 cm distance - direct: 2.520 lux illuminance at 85 cm distance, 1.560 lux illuminance at 110 cm distance
 Colour temperature per light source: 4.000 Kelvin (neutral white)
 Number of light sources: 3
 Energy efficiency class per light source: C (spectrum A to G)
 Weighted energy consumption per light source: 68 kWh/1000 h (34 kWh/1000 h & 2 x 17 kWh/1000 h)
 Service life L70B50 per light source: 50.000 h
 Useful luminous flux per light source: 13060 lm (6500 lm & 2 x 3280 lm)
 Material: Head: Aluminium - Column: Aluminium
 Dimensions: Head: 28 x 61 x 4.2 cm - Column: 3.5 x 5.3 cm
 Position of the switch: Column

- Stable, massive steel base, 30 x 45 cm. Split base fits around table legs. Hight: 196 cm

Art. No.	Colour	EAN-Code	Tariff-No.	Base	Cable length (approx.)	Protection class	Pack size / PU	Weight (incl. packaging)	PU
8258402	white	4002390081108	94052190	base	2,50 m	I shock-proof plug	118 x 39,5 x 14 cm	14,764 kg	1 pc(s).
8258490	black	4002390087230	94052190	base	2,50 m	I shock-proof plug	118 x 39,5 x 14 cm	14,764 kg	1 pc(s).
8258495	silver	4002390075060	94052190	base	2,50 m	I shock-proof plug	118 x 39,5 x 14 cm	14,764 kg	1 pc(s).