



HP Compaq 6200 Pro Small Form Factor Business PC

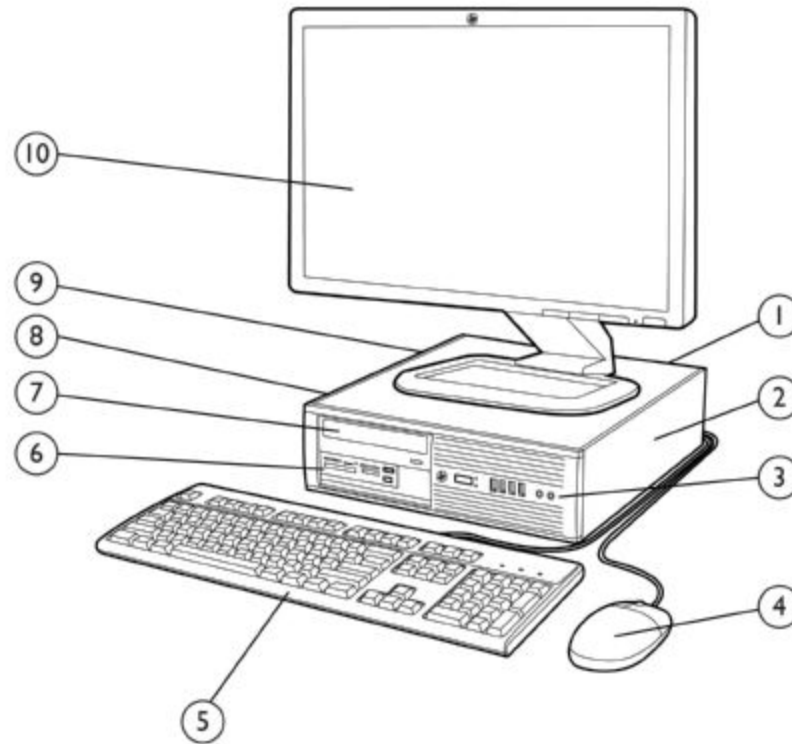

- 1 Rear I/O includes (6) USB 2.0 ports, serial port, PS/2 mouse and keyboard ports, RJ-45 network interface, DisplayPort v1.1a and VGA video interfaces, and 3.5mm audio in/out jacks
- 2 Low profile expansion slots include (1) PCI, (2) PCI Express x1 and (1) PCI Express x16 graphics
- 3 Front I/O includes (4) USB 2.0 ports, dedicated headphone output, and a microphone/headphone jack
- 4 HP Mouse
- 5 HP Keyboard
- 6 3.5" external drive bay supporting a media card reader or a secondary hard disk drive
- 7 5.25" external drive bay supporting an optical disk drive
- 8 3.5" internal drive bay supporting primary hard disk drive
- 9 240W standard or 90% high efficiency Power Supply
- 10 HP Monitor (sold separately)

Overview

HP Compaq 6200 Pro Microtower Business PC

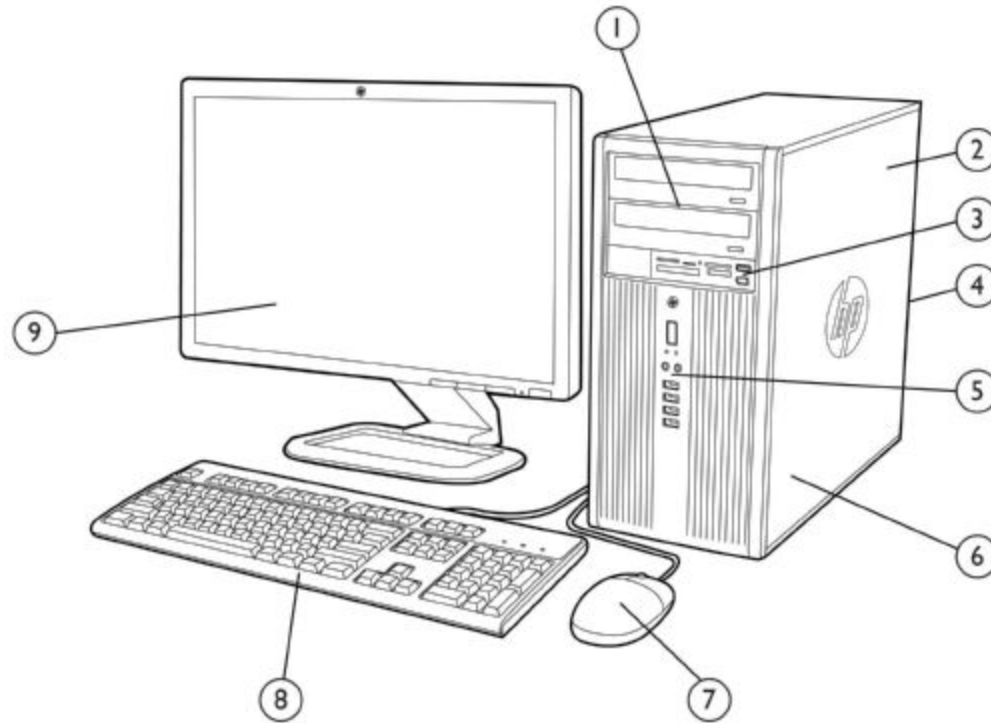

- 1 (2) 5.25" external drive bays supporting optical disk drives or removable hard disk drives; (2) 3.5" internal drive bays supporting hard disk drives
- 2 320W standard or 90% high efficiency Power Supply
- 3 3.5" external drive bay supporting the HP Media Card Reader
- 4 Rear I/O includes (6) USB 2.0 ports, serial port, PS/2 mouse and keyboard ports, RJ-45 network interface, DisplayPort v1.1a and VGA video interfaces, and 3.5mm audio in/out jacks
- 5 Front I/O includes (4) USB 2.0 ports, dedicated headphone output, and a microphone/headphone jack
- 6 Full height expansion slots include (1) PCI, (2) PCI Express x1 and (1) PCI Express x16 graphics
- 7 HP Mouse
- 8 HP Keyboard
- 9 HP Monitor (sold separately)

Overview

At A Glance

- Choice of two professional chassis form factors: SFF & MT
- PC chassis and all internal components and modules are 100% free of brominated flame retardants (BFRs) and Polyvinyl Chloride (PVC).
- UEFI BIOS developed and engineered by HP for better security, manageability and software image stability
- Intel Q65 Express chipset supporting Intel 2nd generation Core processors and featuring Intel HD Graphics)
- Intel 82579LM GbE integrated network connection
- DDR3 Synchronous Dynamic Random Access Memory (SDRAM)
- Integrated dual independent monitor support via VGA and digital DisplayPort v1.1a video interfaces
- Standard efficiency or 90% high efficiency energy saving power supplies available ENERGY STAR qualified
- Guaranteed lengthy purchase lifecycles and image stability
- Software image fully compatible across all models and form factors
- Created using industry leading Design for Environment standards
- Selected configurations with global availability easily set up and ordered through HP.com Business to Business portals (<http://h10019.www1.hp.com/business-site/index.html>)
- Tailored HP Factory Express deployment and lifecycle services available (<http://h71028.www7.hp.com/enterprise/cache/97688-0-0-225-121.aspx>)
- Protected by HP Services, including standard warranties up to 5-5-5 (terms and conditions vary by country; certain restrictions and exclusions apply)
- Tool-less serviceability features for easier upgrades and repairs

Standard Features and Configurable Components (availability may vary by country)

Operating Systems

| | |
|---------------------|--|
| Preinstalled | Genuine Windows Vista Home Basic ¹ Genuine Windows Vista Business ¹ Free Linux 2.0 Genuine Windows 7 Professional Edition (32-bit or 64-bit) Genuine Windows 7 Ultimate Edition (32-bit or 64-bit) FreeLnx Genuine Windows 7 Professional Edition (32-bit or 64-bit) ² Genuine Windows 7 Ultimate Edition (32-bit or 64-bit) Free Linux 2.0 |
| Supported | Genuine Windows XP Professional Edition Genuine Windows 7 Home Basic Edition (32-bit) Genuine Windows 7 Home Premium Edition (32-bit or 64-bit) Genuine Windows Vista Enterprise Edition ¹ Genuine Windows 7 Enterprise Edition |
| Certified | Novell SUSE Linux Enterprise Desktop 11† |

¹ Certain Windows Vista product features require advanced or additional hardware. Refer to the following web sites for details:

www.microsoft.com/windowsvista/getready/hardwarereqs.msp#

www.microsoft.com/windowsvista/getready/capable.msp#

Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit:

www.windowsvista.com/upgradeadvisor

† The following features are not supported by Novell SUSE Linux Enterprise Desktop:

- Intel Gigabit CT Desktop NIC
- Broadcom NetXtreme Gigabit Ethernet Plus
- HP 22-in-1 Media Card Reader
- HP ProtectTools
- HP Blu-ray Writer playback of commercial movies
- DisplayPort video interface
- HP 2nd serial port adapter
- Power Management features
- Systems configured with Linux do not qualify for ENERGY STAR

Value Added Software (included with all models; not included when configured with FreeDOS)

| | |
|---------------------------------------|------------------------------|
| HP Vision Diagnostics | PDF Complete Special Edition |
| Microsoft Office Starter Edition 2010 | |

Value Added Software (included with select models; not included when configured with FreeDOS)

| | |
|--|------------------------------------|
| HP Power Assistant v2.0 | HP Virtual Rooms |
| Computer Setup Utility | Corel WinDVD |
| Roxio Creator Business | Mozilla Firefox for Solutions 2011 |
| Norton Internet Security 2011 ¹ | HP Direct Connect |
| HP MyRoom | Box Online Storage - 10GB |

¹ Includes a 60 day subscription for virus definition and minor program revision updates. Internet access required to receive updates.

HP Business PC Services and Feature

| | |
|-------------------------------|---|
| HP Stable Platform Program | Factory Express Deployment and Lifecycle Services |
| Intel Stable Platform Program | Trusted Platform Module (TPM v1.2 *) |
| Business-to-Business Portals | HP Global Series Services |

* TPM module disabled where restricted by law, i.e. Russia.

Service and Support



Standard Features and Configurable Components (availability may vary by country)

On-site warranty and service¹: This limited warranty and service offering delivers parts, labor and on-site repair for terms up to 5 years. Response time is next business day² and includes free telephone support³ 24 x 7. Global coverage² ensures any product purchased in one country and transferred to another non-restricted country will remain fully covered under the original warranty and service offering. Some countries/regions do not offer one year onsite and labor.

¹ Terms and conditions may vary by country. Certain restrictions and exclusions apply

² On-site services may be provided pursuant to a service contract between HP and an authorized HP third party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country

³ Technical telephone support applies only to HP configured, HP and HP qualified third party hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

Chipset

Intel Q65 Express

Processor

Intel® Celeron® Processors

Intel Celeron G440 Processor

1.60 GHz, 1M cache, 1 core/1 thread
Intel HD Graphics

Intel Celeron G460 Processor

1.80 GHz, 1M cache, 1 core/2 threads
Intel HD Graphics

Intel® Pentium® Processors

Intel Pentium G620 Processor

2.60 GHz, 3M cache, 2 cores/2 threads
Intel HD Graphics

Intel Pentium G630 Processor

2.70 GHz, 3M cache, 2 cores/2 threads
Intel HD Graphics

Intel Pentium G840 Processor

2.80 GHz, 3M cache, 2 cores/2 threads
Intel HD Graphics

Intel Pentium G850 Processor

2.90 GHz, 3M cache, 2 cores/2 threads
Intel HD Graphics

Intel Pentium G860 Processor

3.00 GHz, 3M cache, 2 cores/2 threads
Intel HD Graphics

Intel® 2nd Generation Core™ i3 Processors

Intel Core i3-2100 Processor

3.10 GHz, 3M cache, 2 cores/4 threads
Intel HD Graphics 2000

Intel Core i3-2105 Processor

3.10 GHz, 3M cache, 2 cores/4 threads
Intel HD Graphics 3000

Intel Core i3-2120 Processor

3.30 GHz, 3M cache, 2 cores/4 threads
Intel HD Graphics 2000

Intel Core i3-2130 Processor

3.40 GHz, 3M cache, 2 cores/4 threads
Intel HD Graphics 2000

Intel® 2nd Generation Core™ i5 Processors

Intel Core i5-2400 Processor

3.10 GHz, 6M cache, 4 cores/4 threads
Intel HD Graphics 2000
Intel Stable Image Platform Program (SIPP)

Intel Core i5-2500 Processor

3.30 GHz, 6M cache, 4 cores/4 threads
Intel HD Graphics 2000
Intel Stable Image Platform Program (SIPP)

Intel® 2nd Generation Core™ i7 Processors

Intel Core i7-2600 Processor

3.40 GHz, 8M cache, 4 cores/8 threads
Intel HD Graphics 2000
Intel Stable Image Platform Program (SIPP)

Standard Features and Configurable Components (availability may vary by country)

System Memory Support

The HP Compaq 6200 Elite Series supports the 2nd generation Intel® Core™ processor family. Based on a new PC micro-architecture, the processor is designed for a two-chip platform consisting of a processor and Platform Controller Hub (PCH). Unlike previous generations, the processor includes an integrated memory controller (IMC). The IMC supports DDR3 protocols with two independent, 64-bit wide channels each accessing one or two DIMMs.

- Two channels of non-ECC unbuffered DDR3 memory with a maximum of two UDIMMs per channel
- Single-channel and dual-channel memory organization modes
- Data burst length of eight for all memory organization modes
- DDR3 memory data transfer rates of 1066 MT/s (PC3-8500) and 1333 MT/s (PC3-10600)
- 64-bit wide channels
- DDR3 I/O voltage of 1.5V
- Maximum memory bandwidth of 10.6 GB/s in single-channel mode or 21 GB/s in dual-channel mode assuming DDR3 1333 MT/s (PC3-10600)
- The largest memory capacity possible is 32GB using four (4) 8GB DIMMs

CAUTION: You must shut down the computer and disconnect the power cord before adding or removing memory modules. Regardless of the power-on state, voltage is always supplied to the memory modules as long as the computer is plugged in to an active AC outlet. Adding or removing memory modules while voltage is present may cause irreparable damage to the memory modules or system board.


Memory Configurations:

Slot 1 is black and must always be populated. Not all memory configurations possible are represented below.


NOTE: For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

| Total Memory | Slot | | | |
|---------------------------------|-----------|-------------|-------------|-------------|
| | Channel A | | Channel B | |
| | 1 (black) | 2 (white) | 3 (white) | 4 (white) |
| 2 GB | 2 GB | unpopulated | unpopulated | unpopulated |
| 4 GB (dual channel) | 2 GB | unpopulated | 2 GB | unpopulated |
| 8 GB (dual channel) | 2 GB | 2 GB | 2 GB | 2 GB |
| 16 GB (dual channel) | 4 GB | 4 GB | 4 GB | 4 GB |

Small Form Factor

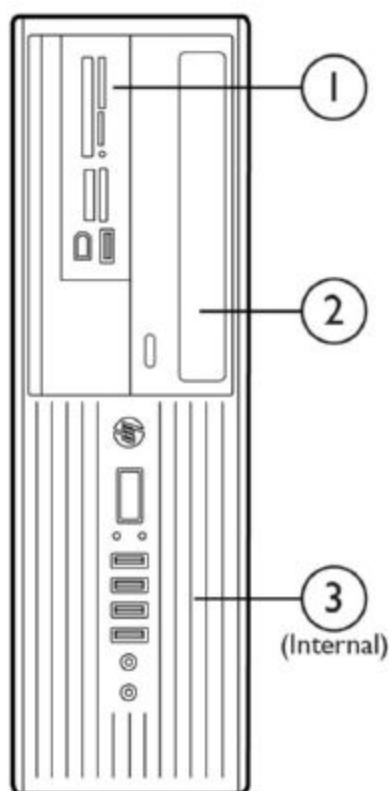

Microtower

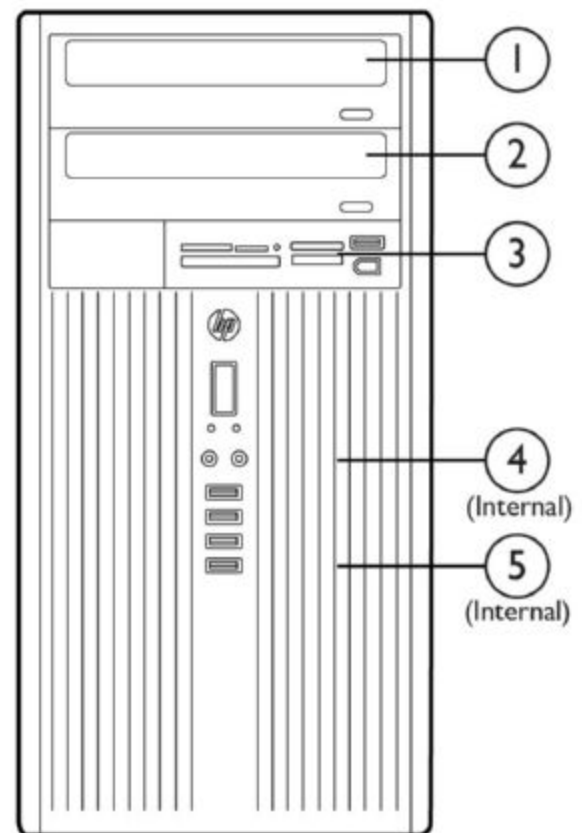

Standard Features and Configurable Components (availability may vary by country)

| Storage Drive Support | | | | | | |
|-----------------------|-----|-----|-----|-----|-----|-----|
| | SFF | | | MT | | |
| | MCR | ODD | HDD | MCR | ODD | HDD |
| Quantity Supported | 1 | 1 | 2 | 1 | 2 | 2 |
| Position | 1 | 2 | 1,3 | 3 | 1,2 | 4,5 |

Data Storage Drives

160-GB Hard Disk Drives

[HP 160GB 10K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive](#)
Includes 3.5" adapter

250-GB Hard Disk Drives

[HP 250-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive](#)

300-GB Hard Disk Drives

[HP 300GB 10K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive](#)
Includes 3.5" adapter

320-GB Hard Disk Drives

[HP 320-GB 7.2K rpm SATA 3.0Gb/s 2.5" Self-Encrypting Drive](#)
Includes 3.5" adapter

500-GB Hard Disk Drives

[HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive](#)

750-GB Hard Disk Drives

[HP 750-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive](#)

1-TB Hard Disk Drives

[HP 1-TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive](#)

Solid State Drives

[HP 80-GB SATA 3.0Gb/s Solid State Drive](#)
Includes 3.5" adapter

[HP 120-GB SATA 3.0Gb/s Solid State Drive](#)
Includes 3.5" adapter when installed in SFF, MT

[HP 128-GB SATA 3.0Gb/s Solid State Drive](#)
Includes 3.5" adapter when installed in SFF, MT

[HP 160-GB SATA 3.0Gb/s Solid State Drive](#)
Includes 3.5" adapter

[HP 256-GB SATA 3.0Gb/s Solid State Drive](#)
Includes 3.5" adapter when installed in SFF, MT

Optical Disc Drives

[HP DVD-ROM Drive¹](#)

[HP SuperMulti DVD Writer Drive^{1,2,3}](#)

[HP Blu-ray Writer Drive](#)

¹ For playing DVDs, Corel WinDVD 8

² For writing CDs, choice of Sonic/Roxio Easy Media Creator 9 or Roxio Business Creator 10

³ For writing CDs and DVDs, video editing and authoring DVDs, choice of Sonic/Roxio Easy Media Creator 9 or Roxio Business Creator 10

Media Card Readers

[HP 22-n-1 Media Card Reader](#)

Standard Features and Configurable Components (availability may vary by country)

Security Solutions and Capabilities

Trusted Platform Module (TPM) 1.2¹
SATA port disablement (via BIOS)
Drive lock
Serial, parallel, USB enable/disable (via BIOS)
Optional USB Port Disable at factory (user configurable via BIOS)
Removable media write/boot control
Power-On password (via BIOS)
Setup password (via BIOS)
HP Solenoid Hood Lock / Sensor
Support for chassis padlocks and cable lock devices
Intel Identify Protection Technology (IPT):

Models configured with Intel 2nd generation Core processors have the ability to utilize advanced security protection for online transactions. IPT, used in conjunction with participating web sites, provides double identity authentication by adding a hardware component in addition to the usual user name and password. IPT is initialized through an HP ProtectTools module (sold separately).

¹ TPM module disabled where use is restricted by law; for example, Russia.

Network Interface Connections

Intel 82579LM integrated GbE Network Connection
Intel Gigabit CT Desktop NIC (PCIe x1)
HP 802.11 b/g/n Wireless NIC (PCIe x1)

Graphics

Intel HD Graphics 2000/3000 (integrated)
AMD FirePro 2270 Graphics (PCIe x16)
AMD Radeon HD 6350 Graphics (PCIe x16)
AMD Radeon HD 6450 Graphics (PCIe x16)
AMD Radeon HD 6570 Graphics (PCIe x16)
[Available on the Microtower only](#)
Nvidia NVS 295 Graphics (PCIe x16)
Nvidia NVS 300 Graphics (PCIe x16)
Nvidia NVS 300 Graphics (PCIe x1)
Nvidia NVS 310 Graphics (PCIe x16)
NVIDIA GeForce 405 Graphics (PCIe x16)
[Available in China only](#)

HP DisplayPort Cable
HP DisplayPort to DVI-D Adapter
HP DisplayPort to HDMI Adapter
HP DisplayPort to VGA Adapter
Surround View (enable/disable via F10)*

* For Windows 7 systems, this enables the Surround View option that allows the integrated graphics controller and an AMD PCI Express graphics card to work at the same time for multi-monitor support.

Standard Features and Configurable Components (availability may vary by country)

Multi-Media

High Definition Audio with Realtek ALC261 codec (all ports are stereo)
Microphone/Headphone* and dedicated headphone front ports (3.5mm)
Line-out and Line-In rear Ports* (3.5mm)
Multi-streaming capable*
Internal Speaker (standard)
HP Thin USB Powered Speakers
HP USB HD 720P Business Webcam
HP Business Headset
SRS Premium Sound

* The front microphone port is re-taskable as a Line-in, Microphone-in or Headphone-in port. Rear audio input ports are re-taskable as a Line-in or Microphone-in port. External speakers must be powered externally. Multi-streaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks. This allows for different audio applications to use separate audio ports on the system. For example, the front jacks could be used with a headset for a communications application while the rear jacks are being used with external speakers and a multimedia application.

Input/Output Devices

HP PS/2 Standard Keyboard
HP USB Standard Keyboard
HP USB Keyboard with USB ports
HP USB Smart Card (CCID) Keyboard
HP USB Mini Keyboard
HP USB and PS/2 Washable Keyboard

HP PS/2 Optical Mouse
HP USB Optical Mouse
HP USB Laser Mouse
HP USB and PS/2 Washable Mouse

Miscellaneous Devices and Configurations

HP FireWire IEEE 1394 PCIe x1 Card
HP SuperSpeed USB 3.0 PCIe x1 Card
HP Serial Port Adapter (RS-232 compatible); provides 2nd Serial Port
HP Parallel Port Adapter
HP eSATA Port Adapter
HP SFF Tower Stand

After-Market Options (availability may vary by region)

Communication Devices

| | Part Number |
|--|-------------|
| Intel Gigabit CT Desktop NIC (PCIe x1) | FH969AA |
| Broadcom NetXtreme GbE Ethernet Plus NIC (PCIe x1) | FS215AA |
| HP Wireless 802.11 b/g/n NIC (PCIe x1) | FH971AA |

Graphics Solutions

| | Part Number |
|--|-------------|
| AMD Radeon HD 6350 Graphics (PCIe x16) | QK638AA |
| AMD Radeon HD 6450 Graphics (PCIe x16) | QM229AA |
| AMD Radeon HD 6570 Graphics (PCIe x16) (Available in Microtower only) | QP027AA |
| Nvidia Quadro NVS 295 Graphics (PCIe x16) | FY943AA |
| Nvidia Quadro NVS 300 Graphics (PCIe x16) | BV456AA |
| Nvidia NVS 300 Graphics (PCIe x1) | BV457AA |
| Nvidia GeForce 405 Graphics (PCIe x16) (Available in China only) | QM194AA |

| | |
|---|---------|
| HP DisplayPort Cable Kit | VN567AA |
| HP DisplayPort To Dual Link DVI-D Adapter | NR078AA |
| HP DisplayPort To DVI-D Adapter | FH973AA |
| HP DisplayPort to HDMI Adapter | BP937AA |
| HP DisplayPort to VGA Adapter | AS615AA |
| HP DMS-59 to Dual DVI Cable | DL139A |
| HP DMS-59 to Dual DisplayPort Adapter | XP688AA |

Data Storage Drives and Accessories

| | Part Number |
|---|-------------|
| HP 160GB 10K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive Includes 3.5" adapter | EW222AA |
| HP 300GB 10K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive Includes 3.5" adapter | FM802AA |
| HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive | QK554AA |
| HP 750-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive | QR469AA |
| HP 1-TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive | QK555AA |

| | |
|--|---------|
| HP 128-GB SATA 3.0Gb/s Solid State Drive | QV063AA |
| HP 160-GB SATA 3.0Gb/s Solid State Drive | QV064AA |
| HP 180-GB SATA 3.0Gb/s Solid State Drive | C1N42AA |

NOTE: Use of HP System Software Recovery Disks (SSRD) is not supported on 128GB SSD models due to minimum image size requirements (>=140GB) for the SSRD.

| | |
|--|---------|
| HP eSATA Adapter | FH966AA |
| HP Removable SATA Hard Drive Enclosure (frame & carrier) | RY102AA |
| HP Removable SATA Hard Drive Enclosure (carrier only) | RY103AA |

After-Market Options (availability may vary by region)

Input Devices

Part Number

| | |
|-----------------------------------|---------|
| HP PS/2 Standard Keyboard | DT527A |
| HP USB Standard Keyboard | DT528A |
| HP USB Keyboard with USB ports | BT330AA |
| HP USB Mini Keyboard | AS601AA |
| HP USB Gray Keyboard | DT529A |
| HP USB Smart Card (CCID) Keyboard | BV813AA |
| HP USB Keyboard and Mouse Kit | RC465AA |

| | |
|---|---------|
| HP USB Washable Keyboard | VF097AA |
| HP USB and PS/2 Washable Mouse | BM866AA |
| HP USB and PS/2 Washable Keyboard and Mouse Kit | BU207AA |

| | |
|-----------------------|---------|
| HP PS/2 Optical Mouse | EY703AA |
| HP USB Optical Mouse | DC172AT |
| HP USB Laser Mouse | GW405AT |
| HP USB Travel Mouse | RH304AA |

| | |
|---------------------------------------|---------|
| HP 2.4GHz Wireless Keyboard and Mouse | NB896AA |
|---------------------------------------|---------|

System Memory

Part Number

| | |
|--------------|---------|
| HP 1 GB DIMM | AT023AA |
| HP 2 GB DIMM | AT024AA |
| HP 4 GB DIMM | VH638AA |

Multi-Media Devices

Part Number

| | |
|--------------------------------|---------|
| HP Thin USB Powered Speakers | KK912AA |
| HP DVD-ROM Drive | AR629AA |
| HP SuperMulti DVD Writer Drive | AR630AA |
| HP Blu-ray Writer Drive | AR482AA |
| HP USB HD 720P Business Webcam | QP896AA |
| HP Business Headset | QK550AA |

Removable Media Storage

Part Number

| | |
|--------------------------------|---------|
| HP USB External Diskette Drive | DC141B |
| HP 22-n-1 Media Card Reader | AR941AA |

Security Devices

Part Number

| | |
|--------------------------------------|---------|
| HP/Kensington MicroSaver Cable Lock | PC766A |
| HP Business PC Security Lock | PV606AA |
| HP SFF Solenoid Lock and Hood Sensor | BP428AA |
| HP MT Solenoid Lock and Hood Sensor | DE618A |
| HP SFF Wall Mount/Security Sleeve | VN570AA |
| HP Keyed Lock Cable | BV411AA |

HP Client Automation Software

Part Number

| | |
|---|---------|
| HP Client Automation - Standard Edition (single seat) | T3488AA |
| HP Client Automation - Standard Edition (10 seats) | TA599AA |
| HP Client Automation - Standard Edition (100 seats) | TA600AA |
| HP Client Automation - Standard Edition (500 seats) | TA601AA |
| HP Client Automation - Standard Edition (1,000 seats) | T3489AA |



After-Market Options (availability may vary by region)

Stands and Accessories

| | Part Number |
|--|--------------------|
| HP Integrated Work Center Stand (SFF) | QP897AA |
| HP SFF Tower Stand | VN569AA |
| HP Serial Port Adapter (RS-232 compatible) | PA716A |
| HP Parallel Port Adapter | KD061AA |
| HP 5.25" Blank Bezel Kit (50 pack) | DC177B |
| HP FireWire IEEE 1394 Card | PA997A |
| HP SuperSpeed USB 3.0 Card | BM867AA |

Technical Specifications

Weights & Dimensions

Dimensions

(configured with 1 HDD and 1 ODD)

| | SFF | MT |
|--|---|--|
| Chassis (H x W x D) | 4.0 x 13.3 x 14.9 in (100 x 338 x 379 mm) | 14.9 x 7.0 x 17.0 in (377 x 177 x 431 mm) |
| System Volume | 782.77 cu in (12.8 L) | 1757.48 cu in (28.8 L) |
| Tower Stand (H x W x D) | 1.1 x 7.0 x 7.9 in (29 x 178 x 200 mm) | N/A |
| Packaging (H x W x D) | 9.0 x 19.7 x 23.4 in (229 x 500 x 594 mm) | 19.7 x 12.2 x 23.6 in (500 x 310 x 600 mm) |
| System Weight* | 16.7 lb (7.6 kg) | 20.5 lb (9.3 kg) |
| Shipping Weight* | 17.9 lb (8.1 kg) | 28.8 lb (13.1 kg) |
| Max Supported Weight (desktop orientation) | 77.0 lb (35.0 kg) | N/A |

I/O Ports

| | |
|------------|--|
| USB 2.0 | Front - four (4) ports Rear - six (6) ports |
| Serial | one RS-232 compatible port standard second port available optionally |
| Parallel | one port available as an option |
| eSATA | one port available as an option |
| PS/2 | color coded support for keyboard (purple) and mouse (green) |
| Video | VGA and DisplayPort v1.1a provide integrated dual independent monitor support |
| DVI output | available via optional DisplayPort to DVI Adapter |
| Audio | Front - microphone & headphone Rear - line input (supports microphone or line input), line out All ports are 3.5mm in diameter NOTE: See Audio/Visual section for information on re-taskable audio ports. |
| NIC | Industry standard RJ-45 port accesses the integrated network interface controller |

Slots

| | SFF | MT |
|---|--|--|
| Conventional PCI Revision 2.3 5 volt | 1 each 2.5" low profile 6.6" length 25W max. power | 1 each 4.2" full height 6.6" length 25W max. power |
| PCI Express 2.0 | 2 each x1 slots 2.5" low profile 6.6" length 10W max. power | 2 each x1 slots 4.2" full height 6.6" length 10W max. power |
| | 1 each x16 slot 2.5" low profile 6.6" length 25W max. power | 1 each x16 slot 4.2" full height 6.6" length 75W max. power |

Bays

| | SFF | MT |
|-------------------|--|-----------------------|
| 3.5" external | 1 bay available for Media Card Reader unless used for a secondary hard drive | |
| 5.25" external | 1 each 8.19" depth | 2 each 8.19" depth |
| Internal HDD Bays | 1 each 3.5" drives | 2 each 3.5" drives |

Controller

| | |
|-----------------------|--|
| Hard Drive Controller | These systems provide four serial ATA (SATA) interfaces that support transfer rates up to 6.0 Gb/s (for ports 0 and 1, 3 Gb/s on all others). These systems can also support an external SATA (eSATA) device through an optional bracket/cable assembly. |
|-----------------------|--|

Technical Specifications

| | |
|----------------------|---|
| SATA Interfaces | 2 ea. SATA 3.0 1 ea. SATA 2.0 1 ea. eSATA |
| Host SATA Controller | Advanced Host Controller Interface (AHCI) Revision 1.2. The specification includes a description of the hardware/software interface between system software and the host controller hardware. |

Unit Environment and Operating Conditions

General Unit Operating Guidelines

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

| | |
|----------------------------------|---|
| Temperature Range | Operating: 50° to 95° F (10° to 35° C)* Non-operating: -22° to 140° F (-30° to 60° C) |
| Relative Humidity | Operating: 10% to 90% (non-condensing at ambient) Non-operating: 5% to 95% (non-condensing at ambient) |
| Maximum Altitude (unpressurized) | Operating: 10,000 ft (3048 m) Non-operating: 30,000 ft (9144 m) |

* Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.

Power Supply

| | SFF | MT |
|---|--|--|
| Standard Efficiency | 240W active PFC | 320W active PFC |
| High Efficiency* | 240W active PFC 87/90/87% efficient @ 20/50/100% load | 320W active PFC 87/90/87% efficient @ 20/50/100% load |
| Operating Voltage Range | | 90 - 264 VAC |
| Rated Voltage Range | | 100 - 240 VAC |
| Rated Line Frequency | | 50/60 Hz |
| Operating Line Frequency Range | | 47 - 63 Hz |
| Rated Input Current | 4A | 5.5A |
| Rated Input Current with Energy Efficient* Power Supply | 4A | 5.5A |
| Current Leakage (NFPA 99) | < 275 µA | < 450 µA |
| Power Supply Fan | | 92mm variable speed |
| Power Cord Length | | 6.0 ft. (1.83 m) |

* High efficiency power supply is a requirement for ENERGY STAR qualification in conjunction with a select range of processors and modules

Technical Specifications

ROM BIOS Information

Key features of the HP BIOS include:

- Deployment and manageability - HP BIOS provides several technologies that help integrate the HP Compaq 6200 Pro Series PC into the enterprise, such as PXE, remote configuration, remote control, and F10 Setup support for 12 languages.
- Stability - HP BIOS supports the HP stable product roadmap by releasing only critical BIOS changes to the factory and advanced change notification.
- Supports UEFI specification 2.1
- Thermal and power management - The HP BIOS provides and enables thermal and power management technologies so component temperatures are managed for high reliability and to assist in operating the HP Business Desktop computer in any enterprise environment.
- Acoustic performance - Industry leading acoustic emissions across the range of operating conditions.
- Serviceability - HP BIOS provides diagnostic and detailed service information.
- Upgrades and recovery - HP BIOS provides numerous ways to upgrade HP Business Desktop computers, including BIOS updates from within DOS (DOSFlash), BIOS updates from within Windows (HPQFlash), HP Client Manager, and fail-safe recovery. In addition, the HP Business Desktop BIOS Utilities tool enables replicated BIOS setup throughout the Enterprise; it is available from within the BIOS software and from the support website.
- HP BIOS uses PKI signing of the BIOS for trusted BIOS upgrades and recovery.

Additional HP BIOS Features

- Power-On password - Helps prevent an unauthorized user from powering on the system.
- Administrator password - Also known as the setup password, this helps prevent unauthorized changes to the system configuration. If the administrator password is not known, the BIOS version cannot be changed and changes cannot be made to BIOS settings using F10 setup or under the OS.
- Advanced Configuration and Power Interface (ACPI) - Represents a significant innovation in power and configuration management, allowing operating systems and applications to manage power based on activity and usage. HP Compaq business PCs use ACPI to provide power conservation features. S5 Max Power Savings setting supports EU Lot6 requirement and allows the computer to power down below 1W in S5 (when turned off). When S5 Max Power Savings feature is enabled power to slots is turned off along with WOL functionality.

Other Features

- Advanced Configuration and Power Management Interface (ACPI). Allows the system to wake from a low power mode. Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.
- System Management BIOS v2.6
- Intel Wired for Management support; industry wide initiative to make Intel architecture based PCs, servers and mobile computers more inherently manageable out-of-the-box and over the network
- Dual State Power Button; acts as both an on/off button and a suspend-to-sleep button

Serviceability Features

- Dual colored power LED on front of computer to indicate either normal or fault condition
- Diagnostic LED Explanation Table:
 - Number of 1-second red LED blinks followed by a 2-second pause, then repeats:
 - 2 - processor thermal protection activated
 - 3 - processor not installed
 - 4 - power supply failure
 - 5 - memory error
 - 6 - video error
 - 7 - PCA failure (ROM detected failure prior to video)
 - 8 - invalid ROM, bootblock recovery mode
 - 9 - system not fetching code
 - 10 - system hang while loading an option ROM
- System/Emergency ROM
- Flash ROM
- CMOS Battery Holder for easy replacement
- Flash Recovery with Video Configuration Record Software
- 5 Aux Power LED on System PCA
- Processor ZIF Socket for easy Upgrade
- Over-Temp Warning on Screen (Requires IM Agents)
- Clear Password Jumper
- DIMM Connectors for easy Upgrade
- Clear CMOS Button
- NIC LEDs (integrated) (Green & Amber)
- Dual Color Power and HD LED - To Indicate Normal Operations and Fault Conditions
- Color coordinated cables and connectors
- Tool-less Hood Removal
- Front power switch

Technical Specifications

- System memory can be upgraded without removing the system board or any internal components
- Tool-less Hard Drive, CD & Diskette Removal
- Green Pull Tabs, and Quick Release Latches for easy identification

Additional Features

| Additional Features | Description |
|---|---|
| Towerable Orientation | SFF can be oriented as either a desktop or a tower |
| Drive Lock | Implementation of the industry standard ATA Security feature set. When enabled, it prevents software access to user data on the drive until one or two user-defined passwords are provided. DPS Access through F10 Setup during Boot |
| Drive Protection System | A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user Running independently of the operating system, it can be accessed through a Windows-based diagnostics utility or through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced |
| SMART Technology (Self-Monitoring, Analysis and Reporting Technology) | The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures |
| SMART I - Drive Failure Prediction | Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted |
| SMART I - Drive Failure Prediction | Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count |
| SMART II - Off-Line Data Collection | By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure |
| SMART III - Off-Line Read Scanning with Defect Reallocation | IOEDC: I/O Error Detection Circuitry |
| SMART IV - End-to-End CRC for hard drives | Detects errors in Read/Write buffers on HDD cache RAM Interface in F10 setup provides confirmation of SMART IV support. |

Technical Specifications - Audio

High Definition Audio

| | |
|--|---|
| Type | Integrated |
| HD Stereo Codec | Realtek 2-channel ALC261 codec |
| Audio I/O Ports | Front microphone-In (150-K ohm Input Impedance) Rear Line-In/Microphone input (150-K ohm Input Impedance, function is configurable by audio driver) Rear Line-Out* (190 ohms Output Impedance, expects at least a 10-K ohm load) Front Headphone-Out (0.5 Ohm Output Impedance, expects at least a 32 ohm load) Front Microphone/Headphone jack is re-task able to provide Microphone input, line-in or Headphone output to support connecting two headphones to the front of the system. When configured as a second front headphone output, both front headphone outputs are always driven with the same signal. All ports are 3.5mm in diameter |
| Internal Speaker Amplifier | For the internal speaker only. External speakers must be powered externally. Rear Line-in audio port is re-taskable as either Line-in or Microphone-In. |
| Multi-streaming Capable | Multi-streaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks. |
| Sampling | 8 kHz - 192 kHz |
| Wavetable Syntheses (software) | Yes - Uses OS soft wavetable |
| Analog Audio | Yes |
| # of Channels on Line-Out (mono/stereo) | Stereo (Left & Right channels) |
| Internal Audio Speaker Power Rating | 1.5 W |
| Internal Speaker | Yes |
| External Speaker Jack (Line-Out) | Yes |

HP Thin USB Powered Speakers

| | |
|--|--|
| On/Off/Volume Controls | Right side of right speaker |
| Power LED | Front of right speaker (green) |
| Frequency Response | FO to 20kHz |
| Watts | 2/3 watt (normal/maximum) |
| Dimensions/Speaker (H x W x D) | 5.72 x 3.74 x 0.96 in 14.52 x 9.50 x 2.45 cm |
| Net Weight | 0.68 lbs 0.31kg |
| Color | Black |
| Environmental (all conditions non-condensing) | Operating 14° to 104° F Temperature: -10° to 40° C Relative Humidity 40% to 90% |
| Speaker Cable Length | Input Cord: 5.91 ft 1800mm L-channel Cord: 3.28 ft 1000mm USB Cord: 5.91 ft 1800mm |

Technical Specifications - Audio

SRS Premium Sound Technology

SRS Premium Sound™ is a state-of-the-art solution suite which optimizes the audio experience for all business applications including VoIP, computer based training, business presentations and digital content creation for any speaker configuration (notebook / desktop speakers or headphones). SRS Premium Sound delivers natural and immersive surround sound complete with deep, enveloping bass and crystal clear dialog which allows users to clearly hear audio and voice in communications or presentations and ensures that digital content can be experienced with uncompromised quality.

SRS Premium Sound Features

- Premium audio experience for all applications including VoIP, Video Conferencing, Webcasts, Multimedia Presentations and Digital Content Creation
- Natural and Immersive sound from two speakers or headphones
- Custom-tuned solutions to provide superior natural sound from desktop speakers and headphones
- Crystal clear dialog
- Deep, rich bass
- Intuitive user interface with presets for ease of use

SRS Premium Sound Benefits

- Turn your desktop into a multimedia powerhouse!
- Bring your business communication to life with natural sounding voice and clear dialog
- Increase productivity by making computer based training, webcasts and VoIP available anytime and anywhere with crystal clear audio
- Make presentations shine with rich, expansive sound without the need for external speakers
- Take digital content creation to a new level with deep bass, enhanced fidelity and immersive surround sound which ensures that your content is heard with uncompromised quality and detail

Technical Specifications - Communications

Intel 82579LM GbE Network Connection (integrated)

| | |
|------------------------------|--|
| Connector | RJ-45 |
| System Interface | Integrated on PCA |
| Controller | Intel 82579LM GbE platform LAN connect networking controller |
| Memory | 24 KB FIFO packet buffer memory |
| Data rates supported | 10/100/1000 Mbps |
| IEEE Compliance | 802.1P 802.1Q 802.2 802.3 802.3ab 802.3az 802.3u |
| Bus architecture | PCI Express and SMBus |
| Data transfer mode | PCIe-based interface for active state operation (S0 state) and SMBus for host and management traffic (Sx low power state) |
| Power requirement | Requires 3.3V and 1.05V or just 3.3V with integrated regulators Power consumption 0.697 Watts |
| Boot ROM support | Yes |
| Network transfer mode | Full-duplex Half-duplex (not supported for the 1000BASE-T transceiver) |
| Network transfer rate | 10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps |
| Environmental | Operating Temperature: 0° to 85° C Operating Humidity: 60% RH |
| Management | WOL, auto MDI crossover, PXE, Multi-port teaming, RSS, Advanced cable diagnostic. |
| Alerting | ASF 2.0 support |

Intel Gigabit CT Desktop Network Interface Controller

| | |
|--------------------------------|---|
| Connector | RJ-45 |
| System Interface | PCI Express x1 |
| Controller | Intel WG82574L Gigabit Ethernet Controller |
| Memory | Integrated Dual 48K configurable transmit receive FIFO Buffers |
| Data rates supported | 10/100/1000 Mbps |
| Compliance | IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control |
| Bus architecture | PCI-E 1.0a |
| Data path width | X1, 250 MB/s, Bi-directional interface |
| Data transfer mode | Bus-master DMA |
| Hardware certifications | FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union |
| Power requirement | Aux 3.3V, 3.0 Watts in 1000base-T and 2.0 Watts in 100Base-T |
| Boot ROM support | Yes |
| Network Transfer Rate | 10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps (actual rate limited by PCI Bus) |
| Environmental | Operating Temperature: 32° to 131°F (0° to 55° C) Operating Humidity: 85% at 131° F (55° C) |
| Dimensions | 4.75 x 2.25 x 0.8 in (12.1 x 5.7 x 2.0 cm) |
| Management | WOL, PXE, DMI, WFM 2.0 |

Technical Specifications - Communications

HP 802.11 b/g/n Wireless Network Connection

| | |
|------------------------------|--|
| Dimensions (L x H) | 2.8 x 2.2 in (7.0 x 5.7 cm) |
| Weight | 0.08 lbs (40 g) |
| Controller | Ralink RT2790 |
| System interface | PCI Express x1 |
| Network standard | 802.11 b/g/n |
| Frequency band | 2.400 - 2.497 GHz |
| Operating temperature | 14° to 149°F, operating (-10° to 65°C, operating) |
| Storage temperature | -40° to 176°F, non-operating (-40° to 80°C, non-operating) |
| Humidity | 10-90% operating 5-95% non-operating |
| Operating voltage | 3.3V +/- 9% 12V +/- 8% |

| Power Consumption | Platform/WLAN Mode | Power Consumption |
|-----------------------------------|--|---|
| | Maximum Power Consumption: | 10 Watts |
| | Transmit Only | 4 Watts maximum averaged power over 1 second |
| | Transmit Packet or Active Scanning | 1000 mA peak current for 100 microseconds or longer |
| | Receive Only Mode or Idle without IEEE PSP mode enabled | 3 Watts maximum averaged over 1 second |
| | Idle, with IEEE PSP mode enabled | 1.0 Watts maximum averaged over 1 second |
| | Transmit Disabled (turned off in software) | 50 mW maximum, averaged over 1 second |
| | Platform in S3 or S4 (power removed from Low Profile PCI Express Card) | 5 mW maximum, averaged over 1 second |
| Output Power (approximate) | 802.11b mode | +19 dBm +/- 1.0 dB maximum |
| | 802.11g mode | +17 dBm +/- 1.0 dB maximum |
| | EWC mode | +17 dBm +/- 1.0 dB maximum (total power in all transmit chains) |

| Receive Sensitivity | Mode | Data Rate | Sensitivity |
|----------------------------|---------------|------------------|--------------------|
| | 802.11b | 1 Mbps | -94 dBm |
| | 802.11b | 11 Mbps | -85 dBm |
| | 802.11g | 6 Mbps | -91 dBm |
| | 802.11g | 18 Mbps | -85 dBm |
| | 802.11g | 48 Mbps | -75 dBm |
| | 802.11g | 54 Mbps | -72 dBm |
| | EWC (2.4 GHz) | 6.5 Mbps | -87 dBm |
| | EWC (2.4 GHz) | 54 Mbps | -82 dBm |
| | EWC (2.4 GHz) | 81 Mbps | -78 dBm |
| | EWC (2.4 GHz) | 162 Mbps | -74 dBm |
| | EWC (2.4 GHz) | 270 Mbps | -68 dBm |
| | EWC (2.4 GHz) | 300 Mbps | -64 dBm |

Technical Specifications - Communications

| Data Transfer Rate | Data Rate (MCS) | Minimum Throughput |
|--|---|--------------------|
| | 1 Mbps (802.11 b) | 700 kbps |
| | 2 Mbps (802.11 b) | 1.4 Mbps |
| | 5.5 Mbps (802.11 b) | 3.5 Mbps |
| | 11 Mbps (802.11 b) | 5.9 Mbps |
| | 12 Mbps (802.11 g) | 6 Mbps |
| | 18 Mbps (802.11 g) | 9 Mbps |
| | 24 Mbps (802.11 g) | 12 Mbps |
| | 36 Mbps (802.11 g) | 18 Mbps |
| | 48 Mbps (802.11 g) | 21 Mbps |
| | 54 Mbps (802.11 g) | 22.5 Mbps |
| | 6.5 Mbps (20 MHz EWC) | 4.5 Mbps |
| | 13 Mbps (20 MHz EWC) | 9 Mbps |
| | 19.5 Mbps (20 MHz EWC) | 13.5 Mbps |
| | 26 Mbps (20 MHz EWC) | 18 Mbps |
| | 39 Mbps (20 MHz EWC) | 27 Mbps |
| | 52 Mbps (20 MHz EWC) | 36 Mbps |
| | 58.5 Mbps (20 MHz EWC) | 40 Mbps |
| | 65 Mbps (20 MHz EWC) | 45 Mbps |
| | 78 Mbps (20 MHz EWC) | 54 Mbps |
| | 104 Mbps (20 MHz EWC) | 72 Mbps |
| | 117 Mbps (20 MHz EWC) | 81 Mbps |
| | 130 Mbps (20 MHz EWC) | 91 Mbps |
| | 13.5 Mbps (40 MHz EWC) | 8 Mbps |
| | 27 Mbps (40 MHz EWC) | 16 Mbps |
| | 40.5 Mbps (40 MHz EWC) | 24 Mbps |
| | 54 Mbps (40 MHz EWC) | 32 Mbps |
| | 81 Mbps (40 MHz EWC) | 48 Mbps |
| | 108 Mbps (40 MHz EWC) | 64 Mbps |
| | 121.5 Mbps (40 MHz EWC) | 72 Mbps |
| | 135 Mbps (40 MHz EWC) | 81 Mbps |
| Security | IEEE and WiFi compliant 64 / 128 bit WEP encryption | |
| | AES: CCM | |
| | 802.1x authentication | |
| | WPA: 802.1x. WPA-PSK and TKIP | |
| | WPA2 certification | |
| | IEEE 802.11i | |
| | Cisco Certified Extensions, all versions through V5 | |
| Antenna | HP part number 497317-003 | |
| Certifications | Wi-Fi certified | |
| Certifications for use by country | United States, Canada, Peru, Taiwan | |

Technical Specifications - Graphics

Intel HD Graphics (integrated)

| | |
|--------------------------------------|---|
| 3D/2D Controller | Microsoft DirectX 10.1 based with support for Pixel Shader 4.1 |
| VGA Controller | Integrated |
| DisplayPort | v1.1a; integrated, multimode capable; supports HDCP and audio over DisplayPort |
| Bus Type | Intel® Flexible Display Interface (Intel® FDI) - a proprietary link for carrying display traffic from the Processor Graphics controller to the PCH display I/Os. Graphics memory is shared with system memory. Graphics memory usage varies depending on the amount of system memory installed, BIOS settings, operating system, and system load. 32 MB is pre-allocated for graphics use at system boot time. Additional memory can be allocated at boot time by the BIOS for PAVP (Protected Audio Video Playback) support for playback of protected video content. |
| Memory | Additional memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use. |
| HW Video Decode | Hardware Accelerated decode for MPEG2 encrypted video; support for PAVP |
| Maximum Color Depth | 32 bits/pixel |
| Maximum Vertical Refresh Rate | 85 Hz at up to 1920x1440, 75 Hz at 2048x1536. Varies with mode and configuration. See table below. |
| Multi-display Support | Integrated dual independent monitor support facilitated via one VGA port and one DisplayPort v1.1a integrated on the back plane of the system board and presented as part of the rear I/O set of interfaces. Support for DVI, HDMI, dual link DVI or second VGA monitor provided by optional HP DisplayPort adapters (see complete listing of available optional adapters elsewhere in this QuickSpec). The system can support greater than two monitors with the addition of an optional discrete graphics card. Both integrated graphics and discrete graphics can be utilized simultaneously. |
| Graphics/Video API Support | DirectX 10.1 support in hardware OpenGL 3.0 support in hardware |

Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

| Resolution | Maximum Refresh Rates (Hz) | |
|------------|----------------------------|---------|
| | Analog | Digital |
| 640x480 | 85 | 60 |
| 800x600 | 85 | 60 |
| 1024x768 | 85 | 60 |
| 1280x720 | 85 | 60 |
| 1280x1024 | 85 | 60 |
| 1440x900 | 75 | 60 |
| 1600x900 | 75 | 60 |
| 1600x1200 | 85 | 60 |
| 1680x1050 | 75 | 60 |
| 1920x1080 | 85 | 60-R |
| 1920x1200 | 85 | 60-R |
| 1920x1440 | 85 | N/A |
| 2048x1536 | 75 | N/A |
| 2560x1600 | N/A | 60* |

* Only supported when using a DisplayPort connection

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

NOTE: 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

Technical Specifications - Graphics

AMD FirePro 2270 Graphics Card

| | |
|--------------------------------|--|
| Form Factor | PCI Express x16 (generation 2.0) Low Profile, half length, 2.3" x 6.6" Full height bracket utilized when configured to CMT or MT |
| Graphics Controller | AMD FirePro 2270 GPU |
| Output Connector | Single DMS-59 connector Supports dual analog displays with included DMS-59 to dual VGA Y cable. Supports dual digital displays with optional DMS-59 to dual DVI cable. |
| Core Clock | 600MHz |
| Memory Clock | 600MHz |
| Memory Frame Buffer | 512MB, DDR3, 64-bit wide |
| Supported Graphics APIs | DirectX 11 support in hardware OpenGL 4.0 support in hardware |

Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

| Resolution | Maximum Refresh Rate (Hz) | |
|-------------|---------------------------|---------|
| | Analog | Digital |
| 640 x 480 | 85 | 60 |
| 800 x 600 | 85 | 60 |
| 1024 x 768 | 85 | 60 |
| 1280 x 720 | 85 | 60 |
| 1280 x 1024 | 85 | 60 |
| 1440 x 900 | 75 | 60 |
| 1600 x 1200 | 85 | 60 |
| 1680 x 1050 | 75 | 60 |
| 1920 x 1080 | 85 | 60-R |
| 1920 x 1200 | 85 | 60-R |
| 1920 x 1440 | 85 | N/A |
| 2048 x 1536 | 75 | N/A |

NOTE: 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.

AMD Radeon HD 6350 Graphics Card

| | |
|--------------------------------|--|
| Form Factor | PCI Express x16 (generation 2.0) Low Profile, half length, 2.3" x 6.6" Full height bracket utilized when configured to CMT or MT |
| Graphics Controller | AMD HD 6350 GPU |
| Output Connector | Single DMS-59 connector Supports dual analog displays with included DMS-59 to dual VGA cable. Supports dual DVI displays with optional DMS-59 to dual DVI cable. |
| Core Clock | 650MHz |
| Memory Clock | 800MHz |
| Memory Frame Buffer | 512MB, DDR3, 64-bit wide |
| Supported Graphics APIs | HDPCP supported on DVI output using optional DMS-59 to dual DVI cable. DirectX 11 support in hardware. OpenGL 4.0 support in hardware. |

Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

| Resolution | Maximum Refresh Rate (Hz) | |
|-------------|---------------------------|---------|
| | Analog | Digital |
| 640 x 480 | 85 | 60 |
| 800 x 600 | 85 | 60 |
| 1024 x 768 | 85 | 60 |
| 1280 x 720 | 85 | 60 |
| 1280 x 1024 | 85 | 60 |
| 1440 x 900 | 75 | 60 |
| 1600 x 1200 | 85 | 60 |
| 1680 x 1050 | 75 | 60 |
| 1920 x 1080 | 85 | 60-R |
| 1920 x 1200 | 85 | 60-R |
| 1920 x 1440 | 85 | N/A |



Technical Specifications - Graphics

2048 x 1536

75

N/A

NOTE: 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.

AMD Radeon HD 6450 Graphics Card

| | |
|-----------------------------------|---|
| Form Factor | PCI Express x16 (Generation 2.0) Low Profile, half length, 2.3" x 6.6" Full height bracket utilized when configured to CMT or MT |
| Graphics Controller | AMD HD 6450 GPU One (1) DisplayPort1.1 One (1) Dual Link DVI-I |
| Output Connector | Includes a DVI to VGA adapter. Other optional adapter kits are available to support DVI-D, and HDMI monitor inputs (see a complete listing of available optional adapters elsewhere in this QuickSpec). Supports audio with video through the DisplayPort 1.1 connector. DisplayPort v1.2 support will be provided in a future driver update. |
| Core Clock | 625MHz |
| Memory Clock | 800MHz |
| Memory Frame Buffer | 512MB, DDR3, 64-bit wide |
| Display Maximum Resolution | Digital: 2560 x 1600 Analog: 2048 x 1536 (see chart below for more resolutions) |
| Supported Graphics APIs | HDCP supported on DisplayPort 1.1 and DVI output. DirectX 11 support in hardware. |

Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

| Resolution | Maximum Refresh Rate (Hz) | |
|-------------|---------------------------|---------|
| | Analog | Digital |
| 640 x 480 | 85 | 60 |
| 800 x 600 | 85 | 60 |
| 1024 x 768 | 85 | 60 |
| 1280 x 720 | 85 | 60 |
| 1280 x 1024 | 85 | 60 |
| 1440 x 900 | 75 | 60 |
| 1600 x 1200 | 85 | 60 |
| 1680 x 1050 | 75 | 60 |
| 1920 x 1080 | 85 | 60-R |
| 1920 x 1200 | 85 | 60-R |
| 1920 x 1440 | 85 | 60* |
| 2048 x 1536 | 75 | 60* |
| 2560 x 1600 | N/A | 60* |

* Only supported when using a dual link DVI or DisplayPort monitor connection

NOTE: 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.

Technical Specifications - Graphics

AMD Radeon HD 6570 Graphics Card

| | |
|--------------------------------|--|
| Form Factor | PCI Express x16 (generation 2.0) Low Profile, half length, 2.3" x 6.6" Includes full height bracket when configured in MT chassis. |
| Graphics Controller | AMD HD 6570 GPU |
| Output Connector | Two (2) DisplayPort 1.1 One (1) Dual Link DVI-I Includes a DVI-I to VGA adapter. Other optional adapter kits are available to support DVI-D, and HDMI monitor inputs (see complete listing of available optional adapters elsewhere in this QuickSpec). Supports audio with video through the DisplayPort 1.1 connector. Audio is also supported with an optional DisplayPort to HDMI Adapter. DisplayPort 1.2 support will be provided in a future driver update. |
| Core Clock | 650MHz |
| Memory Clock | 900MHz |
| Memory Frame Buffer | 1GB of DDR3, 128-bit wide HDCP supported on DisplayPort and DVI output. |
| Supported Graphics APIs | DirectX 11 support in hardware. OpenGL 4.0 support in hardware |

Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

| Resolution | Maximum Refresh Rate (Hz) | |
|-------------|---------------------------|---------|
| | Analog | Digital |
| 640 x 480 | 85 | 60 |
| 800 x 600 | 85 | 60 |
| 1024 x 768 | 85 | 60 |
| 1280 x 720 | 85 | 60 |
| 1280 x 1024 | 85 | 60 |
| 1440 x 900 | 75 | 60 |
| 1600 x 1200 | 85 | 60 |
| 1680 x 1050 | 75 | 60 |
| 1920 x 1080 | 85 | 60-R |
| 1920 x 1200 | 85 | 60-R |
| 1920 x 1440 | 85 | 60 |
| 2048 x 1536 | 75 | 60 |
| 2560 x 1600 | N/A | 60 |

NOTE: 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.

NVIDIA NVS 295 Graphics Card

| | |
|--------------------------------|---|
| Form Factor | PCI Express x16 (generation 2.0) Low Profile, half length, 2.3" x 6.6" Full height bracket utilized when configured to CMT or MT |
| Graphics Controller | NVIDIA NVS 295 Graphics Board |
| Output Connectors | Two (2) DisplayPort Includes two (2) DisplayPort to VGA Adapters |
| Memory Frame Buffer | 256 MB DDR3 SDRAM |
| Display Output | Drives DisplayPort enabled digital displays at resolutions up to 2560 x 1600 at 60 Hz with reduced blanking Drives DVI enabled digital displays at resolutions up to 1920 x 1200 at 60 Hz with reduced blanking (through DisplayPort to DVI-D (single link) cable) |
| Supported Graphics APIs | OpenGL 3.0 in hardware DirectX 10.0 in hardware |

Technical Specifications - Graphics

NVIDIA NVS 300 PCIe x1 512MB Graphics Card

| | |
|--------------------------------|---|
| Form Factor | PCI Express x1 Low Profile, half length, 2.3" x 6.6" Full height bracket utilized when configured to CMT or MT |
| Graphics Controller | Nvidia GT218 GPU |
| Memory Frame Buffer | 512MB DDR3, 64-bit wide Single DMS-59 connector |
| Output Connectors | Supports dual analog displays with included DMS-59 to dual VGA Y cable. Support dual digital displays with an optional adapters (see complete listing of available optional adapters elsewhere in this QuickSpec). |
| Core Clock | 520MHz |
| Memory Clock | 790MHz |
| Supported Graphics APIs | OpenGL 3.3 support in hardware DirectX 10.0 support in hardware |

Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

| Resolution | Maximum Refresh Rate (Hz) | |
|-------------|---------------------------|---------|
| | Analog | Digital |
| 640 x 480 | 85 | 60 |
| 800 x 600 | 85 | 60 |
| 1024 x 768 | 85 | 60 |
| 1280 x 720 | 85 | 60 |
| 1280 x 1024 | 85 | 60 |
| 1440 x 900 | 75 | 60 |
| 1600 x 1200 | 85 | 60 |
| 1680 x 1050 | 75 | 60 |
| 1920 x 1080 | 85 | 60-R |
| 1920 x 1200 | 85 | 60-R |
| 1920 x 1440 | 85 | N/A |
| 2048 x 1536 | 75 | N/A |

NOTE: 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.

NVIDIA NVS 300 PCIe x16 512MB Graphics Card

| | |
|--------------------------------|---|
| Form Factor | PCI Express x16 (generation 2.0) Low Profile, half length, 2.3" x 6.6" Full height bracket utilized when configured to CMT or MT |
| Graphics Controller | Nvidia GT218 GPU |
| Memory Frame Buffer | 512MB DDR3, 64-bit wide Single DMS-59 connector |
| Output Connectors | Supports dual analog displays with included DMS-59 to dual VGA cable. Supports dual DVI displays with an optional DMS59 to dual DVI cable. |
| Core Clock | 520MHz |
| Memory Clock | 790MHz |
| Supported Graphics APIs | OpenGL 3.3 support in hardware DirectX 10.0 support in hardware |

Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

| Resolution | Maximum Refresh Rate (Hz) | |
|-------------|---------------------------|---------|
| | Analog | Digital |
| 640 x 480 | 85 | 60 |
| 800 x 600 | 85 | 60 |
| 1024 x 768 | 85 | 60 |
| 1280 x 720 | 85 | 60 |
| 1280 x 1024 | 85 | 60 |
| 1440 x 900 | 75 | 60 |
| 1600 x 1200 | 85 | 60 |
| 1680 x 1050 | 75 | 60 |
| 1920 x 1080 | 85 | 60-R |
| 1920 x 1200 | 85 | 60-R |
| 1920 x 1440 | 85 | N/A |



Technical Specifications - Graphics

2048 x 1536

75

N/A

NOTE: 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.

NVIDIA NVS 310 Graphics Card

Introduction

The NVIDIA® NVS™ 310 Graphics Card is a PCI Express low profile form factor graphics add-in card targeted as an active low cost graphics solution for the corporate business and enterprise markets.

The NVIDIA® NVS 310 graphics card is an ideal solution for customers requiring a small form factor graphics add-in card for either standard or small form factor PC designs.

Performance and Features

The NVIDIA® NVS 310 Graphics Card offers 512 MB of ultrafast DDR3 memory and is capable of supporting up to 2 displays.

- DisplayPort connector supports multimode technology to support connection to DVI-D, VGA and HDMI monitors with optional adapters in kits [NR078AA](#), [FH973AT](#), [BP937AA](#), [AS615AA](#).
- For a DisplayPort to DisplayPort connections use the optional DisplayPort Cable Kit VN567AA.

| | |
|----------------------------|--|
| Form Factor (H x L) | Low Profile: 2.713 × 6.15 in |
| Bus Type | PCI Express x16, 2.0 compliant |
| Graphics Controller | NVIDIA® NVS 310 |
| Memory Size | 512 MB DDR3 |
| Memory Clock | 875MHz |
| Memory Bandwidth | 14 GB/s |
| Connectors | 2 x DisplayPort 1.2 |
| Maximum Resolution | Up to 2560 x 1600 (digital display) per display. |
| Display Output | Up to 2 displays in the following configurations |

DisplayPort output:

- Drives two DisplayPort enabled digital display at resolutions up to 2560 × 1600 at 60 Hz with reduced blanking, when connected natively using the 2 DisplayPort connectors on the NVS 310 graphics card
- Supports 2 monitors up to resolution of 1920 × 1200 at 60 Hz with reduced blanking using DisplayPort 1.2 multi stream topology technology.

DVI-D output:

- Drives two digital display at resolutions up to 1920 × 1200 at 60 Hz with reduced blanking using DisplayPort to DVI-D single-link cable adaptors
- Drives two digital display at resolutions up to 2560 × 1600 at 60 Hz with reduced blanking using DisplayPort to DVI-D dual-link cable adaptors

HDMI output:

- NVS 310 is capable of driving two high definition (HD) panels up to resolutions of 1920 × 1080P at 60 Hz using DisplayPort to HDMI cable adaptors

VGA display output:

- Drives two analog display at resolutions up to 1920 × 1200 at 60 Hz using DisplayPort to VGA cable adaptors

Max. Power 19.5 W

Display Resolutions and Refresh Rates

Note: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

| Resolution | Maximum Refresh Rates (Hz) by Connection | | | |
|-------------|--|----------------------|---------------------|-------------|
| | DisplayPort to VGA | DisplayPort to DVI-D | DisplayPort to HDMI | DisplayPort |
| 640 x 480 | 85 | 60 | 60 | 60 |
| 800 x 600 | 85 | 60 | 60 | 60 |
| 1024 x 768 | 85 | 60 | 60 | 60 |
| 1280 x 720 | 85 | 60 | 60 | 60 |
| 1280 x 1024 | 85 | 60 | 60 | 60 |
| 1440 x 900 | 75 | 60 | 60 | 60 |
| 1600 x 1200 | 60 | 60 | 60 | 60 |
| 1680 x 1050 | 60 | 60 | 60 | 60 |
| 1920 x 1080 | 60-R | 60-R | 60 | 60 |
| 1920 x 1200 | 60-R | 60-R | | 60 |



Technical Specifications - Graphics

| | |
|-------------|----|
| 1920 x 1440 | 60 |
| 2048 x 1536 | 60 |
| 2560 x 1600 | 60 |

Note: 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.

NVIDIA GeForce 405 Graphics Card

| | |
|----------------------------|--|
| Form Factor | PCI Express x16 (Generation 2.0) Low Profile, half length, 2.3" x 6.6" Full height bracket utilized when configured to CMT or MT |
| Graphics Controller | NVIDIA GeForce 405 |
| Output Connectors | One (1) VGA analog One (1) DVI-I digital |
| Memory Frame Buffer | 512MB DDR3, 64-bit wide |
| Maximum Resolution | Analog: 1920 x 1440 x 32bpp @ 75Hz Digital: 1600 x 1200 x 32bpp @ 60Hz |

Technical Specifications – Hard Disk Data Storage

Introduction:

HP Serial Advanced Technology Attachment (SATA) Hard Drives maximize the performance of HP Business PCs by providing the technologies to meet your increasing storage demands with high-capacity drives offering superior reliability and performance.

SATA provides faster data transfer speeds, better system cooling airflow, more bandwidth, more headroom for speed increases in future generations and better data integrity. A next-generation technology, the SATA interface connects hard drives to the PC platform enabling easy aggregation of multiple hard drives into a single PC. This offers you the additional benefits of dedicated bandwidth, the ability to more easily identify device failures and scalability. The HP Compaq 6200 Pro Series supports the latest SATA 6.0Gb/s specification.

HP Drive Lock

HP Serial ATA Hard Drives offer enhanced security via a new Drive Lock. When enabled, this ATA security feature set prevents software access to user data on the drive until one or two user-defined passwords are provided.

SMART IV Technology

Self Monitoring Analysis and Reporting Technology (SMART) hard drive technology allows hard drives to monitor their own health and to raise flags if imminent failures are predicted. If the drive determines that a failure is imminent, the SMART hard drive technology enables the intelligent manageability or management software to generate a fault alert. While the current versions of SMART hard drives do a good job monitoring the data on the hard drive media, the ever increasing emphasis on reliability and quality has promoted HP to implement SMART IV technology which constantly checks that the data flow from host interface to media and media to host interface is not compromised. This is accomplished by inserting a 2 byte parity code into every 512 byte block in the data path of the hard drive's Cache RAM. This unique parity checking performed by HP's SMART IV technology hard drives, allows for more complete error detection coverage encompassing the entire data path between the host and the hard drive.

Smart IV is also known as IOEDC: I/O Error Detection Code.

Native Command Queuing

NCQ or Native Command Queuing is a SATA protocol extension that allows the hard drive to have several write or read commands outstanding at the same time. In contrast, normal non-queued operation requires each command to be completed before the next command is issued by the host system. Queuing allows the drive to complete the commands in the order that allows for best overall throughput. It also involves an advanced method of transferring data to or from the host, called First Party Direct Memory Access (FPDMA), which allows the hard drive and the host controller to manage the data transfers for multiple outstanding commands, without involving the host processor. NCQ can contribute to better performance but the results are dependent on many factors, including the access patterns of the various applications and operating system functions that are initiating drive accesses. Enabling NCQ features in the hard drive requires AHCI support from the host system BIOS, controller, and driver. AHCI support is typically implemented in RAID configurations.

NOTE: GB = 1 billion bytes. Actual available capacity is less.

HP 160-GB 7.2K SATA 3.0Gb/s 2.5" Hard Disk Drive

| | |
|--|---|
| Capacity | 160,041,885,696 bytes |
| Rotational Speed | 7,200 rpm |
| Interface | Serial ATA 2.0 (3.0 Gb/s) |
| Buffer Size | 16 MB |
| Logical Blocks | 312,581,808 |
| Seek Time (typical reads, includes controller overhead, including settling) | Single Track: 2.0 ms Average: 12 ms Full-Stroke: 22 ms |
| Height (nominal) | 0.374 in/9.5 mm |
| Width (nominal) | Media diameter: 2.5 in/63.5 mm Physical size: 2.75 in/70 mm |
| Operating Temperature | 41° to 131° F (5° to 55° C) |

Technical Specifications – Hard Disk Data Storage

HP 160-GB 10K SATA 3.0Gb/s 2.5" Hard Disk Drive

| | |
|--|---|
| Capacity | 160,041,885,696 bytes |
| Rotational Speed | 10,000 rpm |
| Interface | Serial ATA 2.0 (3.0 Gb/s) |
| Buffer Size | 16 MB |
| Logical Blocks | 312,581,808 |
| Seek Time (typical reads, includes controller overhead, including settling) | Single Track: 2.0 ms Average: 12 ms Full-Stroke: 22 ms |
| Height (nominal) | 0.6 in (1.53 cm) |
| Width (nominal) | Media diameter: 2.5 in/63.5 mm Physical size: 2.75 in/70 mm |
| Operating Temperature | 41° to 131° F (5° to 55° C) |

HP 250-GB 7.2K SATA 3.0Gb/s 2.5" Hard Disk Drive

| | |
|--|---|
| Capacity | 250,059,350,016 bytes |
| Rotational Speed | 7,200 rpm |
| Interface | Serial ATA 2.0 (3.0 Gb/s) |
| Buffer Size | 16 MB |
| Logical Blocks | 488,397,168 |
| Seek Time (typical reads, includes controller overhead, including settling) | Single Track: 2.0 ms Average: 12 ms Full-Stroke: 22 ms |
| Height (nominal) | 0.374 in/9.5 mm |
| Width (nominal) | Media diameter: 2.5 in/63.5 mm Physical size: 2.75 in/70 mm |
| Operating Temperature | 41° to 131° F (5° to 55° C) |

HP 250-GB 7.2K SATA 6.0Gb/s 3.5" Hard Disk Drive

| | |
|--|--|
| Capacity | 250,059,350,016 bytes |
| Rotational Speed | 7,200 rpm |
| Interface | Serial ATA 3.0 (6.0 Gb/s) |
| Buffer Size | 16 MB |
| Logical Blocks | 488,397,168 |
| Seek Time (typical reads, includes controller overhead, including settling) | Single Track: 1.0 ms Average: 8.5 ms Full-Stroke: 18 ms |
| Height (nominal) | 1 in/2.54 cm |
| Width (nominal) | Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm |
| Operating Temperature | 41° to 131° F (5° to 55° C) |

HP 300-GB 10K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive

| | |
|--|---|
| Capacity | 300,069,052,416 bytes |
| Rotational Speed | 10,000 rpm |
| Interface | Serial ATA 2.0 (3.0 Gb/s) |
| Buffer Size | 16 MB |
| Logical Blocks | 586,072,368 |
| Seek Time (typical reads, includes controller overhead, including settling) | Single Track: 0.7 ms Average: 4.4 ms Full-Stroke: 9.5 ms |
| Height (nominal) | 0.6 in (1.53 cm) |
| Width (nominal) | Media diameter: 2.5 in (6.36 cm) Physical size: 2.75 in (6.99 cm) |
| Operating Temperature | 41° to 131° F (5° to 55° C) |



Technical Specifications – Hard Disk Data Storage

HP 320-GB 7.2K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive

| | |
|--|---|
| Capacity | 320,072,933,376 bytes |
| Rotational Speed | 7,200 rpm |
| Interface | Serial ATA 2.0 (3.0 Gb/s) |
| Buffer Size | 16 MB |
| Logical Blocks | 488,397,168 |
| Seek Time (typical reads, includes controller overhead, including settling) | Single Track: 2.0 ms Average: 12 ms Full-Stroke: 22 ms |
| Height (nominal) | 0.374 in/9.5 mm |
| Width (nominal) | Media diameter: 2.5 in/63.5 mm Physical size: 2.75 in/70 mm |
| Operating Temperature | 41° to 131° F (5° to 55° C) |

HP 320-GB 7.2K rpm SATA 3.0Gb/s 2.5" Self-Encrypting Hard Disk Drive

| | |
|--|---|
| Capacity | 320,072,933,376 bytes |
| Rotational Speed | 7,200 rpm |
| Interface | Serial ATA 2.0 (3.0 Gb/s) |
| Buffer Size | 16 MB |
| Logical Blocks | 488,397,168 |
| Seek Time (typical reads, includes controller overhead, including settling) | Single Track: 2.0 ms Average: 12 ms Full-Stroke: 22 ms |
| Height (nominal) | 0.374 in/9.5 mm |
| Width (nominal) | Media diameter: 2.5 in/63.5 mm Physical size: 2.75 in/70 mm |
| Operating Temperature | 41° to 131° F (5° to 55° C) |

HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

| | |
|--|---|
| Capacity | 500,107,862,016 bytes |
| Rotational Speed | 7,200 rpm |
| Interface | Serial ATA 3.0 (6.0 Gb/s) |
| Buffer Size | 16 MB |
| Logical Blocks | 976,773,168 |
| Seek Time (typical reads, includes controller overhead, including settling) | Single Track: 2.0 ms Average: 11 ms Full-Stroke: 21 ms |
| Height (nominal) | 1 in/2.54 cm |
| Width (nominal) | Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm |
| Operating Temperature | 41° to 131° F (5° to 55° C) |

HP 750-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

| | |
|--|---|
| Capacity | 750,107,862,016 bytes |
| Rotational Speed | 7,200 rpm |
| Interface | Serial ATA 3.0 (6.0 Gb/s) |
| Buffer Size | 16 MB |
| Logical Blocks | 976,773,168 |
| Seek Time (typical reads, includes controller overhead, including settling) | Single Track: 2.0 ms Average: 11 ms Full-Stroke: 21 ms |
| Height (nominal) | 1 in/2.54 cm |
| Width (nominal) | Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm |
| Operating Temperature | 41° to 131° F (5° to 55° C) |



Technical Specifications – Hard Disk Data Storage

HP 1-TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

| | |
|--|---|
| Capacity | 1,000,204,886,016 bytes |
| Rotational Speed | 7,200 rpm |
| Interface | Serial ATA 3.0 (6.0 Gb/s) |
| Buffer Size | 32 MB |
| Logical Blocks | 1,953,525,168 |
| Seek Time (typical reads, includes controller overhead, including settling) | Single Track: 2.0 ms Average: 11 ms Full-Stroke: 21 ms |
| Height (nominal) | 1 in/2.54 cm |
| Width (nominal) | Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm |
| Operating Temperature | 41° to 131° F (5° to 55° C) |

Technical Specifications – Solid State Data Storage

HP 80-GB Solid State Drive

| | |
|--|--|
| Unformatted Capacity | 80-GB |
| Architecture | Multi Level Cell (MLC) NAND Flash with wear leveling 10 channel controller |
| Interface | Serial ATA 2.0 (3.0 Gb/s) |
| Dimensions (W x H x D) | 2.74 x 0.37 x 4 in/6.98 x 0.95 x 10.2 cm |
| Weight | 0.18 lb/80 g |
| Bandwidth Performance | Sustained Sequential Read: Up to 250 MB/s |
| | Sustained Sequential Write: Up to 70 MB/s |
| | Random Read: Up to 35K IOPs |
| | Random Write: Up to 6.6K IOPs |
| Latency | Read: 65-ms |
| | Write: 85-ms |
| Power | DC power requirement: 5 VDC 5%-100 mV ripple p-p |
| | Total power consumption: 0.15W (active); 0.075W (idle) |
| Useful Drive Life | 35TB written, up to 20GB/day for 5 years |
| Environmental (all conditions, non-condensing) | Operating Temperature: 32° to 158° F (0° to 70° C) |
| | Relative Humidity: 5% to 95% |
| | Maximum Wet Bulb Temperature (operating): 84° F (29° C) |
| | Shock: 1,500 G/0.5-ms |

NOTE:

For solid state disk drives, GB means 1 billion bytes. 16GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity varies by content and will be less than 15.8GB.

HP 120-GB Solid State Drive

| | |
|--|--|
| Unformatted Capacity | 120 GB |
| Architecture | Multi Level Cell (MLC) NAND Flash with wear leveling 10 channel controller |
| Interface | Serial ATA 2.0 (3.0 Gb/s) |
| Dimensions (W x H x D) | 2.74 x 0.37 x 4 in (6.98 x 0.95 x 10.2 cm) |
| Weight | 0.18 lb (80 g) |
| Bandwidth Performance | Sustained Sequential Read: Up to 250 MB/s |
| | Sustained Sequential Write: Up to 70 MB/s |
| | Random Read: Up to 35K IOPs |
| | Random Write: Up to 6.6K IOPs |
| Latency | Read: 65-ms |
| | Write: 85-ms |
| Power | DC power requirement: 5 VDC 5%-100 mV ripple p-p |
| | Total power consumption: 0.15W (active); 0.075W (idle) |
| Useful Drive Life | 35TB written, up to 20GB/day for 5 years |
| Environmental (all conditions, non-condensing) | Operating Temperature: 32° to 158° F (0° to 70° C) |
| | Relative Humidity: 5% to 95% |
| | Maximum Wet Bulb Temperature (operating): 84° F (29° C) |
| | Shock: 1,500 G/0.5-ms |

NOTE:

For solid state disk drives, GB means 1 billion bytes. 16GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity varies by content and will be less than 15.8GB.

Technical Specifications – Solid State Data Storage

HP 160-GB Solid State Drive

| | |
|--|--|
| Unformatted Capacity | 160-GB |
| Architecture | Multi Level Cell (MLC) NAND Flash with wear leveling 10 channel controller |
| Interface | Serial ATA 2.0 (3.0 Gb/s) |
| Dimensions (W x H x D) | 2.74 x 0.37 x 4 in/6.98 x 0.95 x 10.2 cm |
| Weight | 0.18 lb/80 g |
| Bandwidth Performance | Sustained Sequential Read: Up to 250 MB/s |
| | Sustained Sequential Write: Up to 70 MB/s |
| | Random Read: Up to 35K IOPs |
| | Random Write: Up to 6.6K IOPs |
| Latency | Read: 65-ms |
| | Write: 85-ms |
| Power | DC power requirement: 5 VDC 5%-100 mV ripple p-p |
| | Total power consumption: 0.15W (active); 0.075W (idle) |
| Useful Drive Life | 35TB written, up to 20GB/day for 5 years |
| | Operating Temperature: 32° to 158° F (0° to 70° C) |
| Environmental (all conditions, non-condensing) | Relative Humidity: 5% to 95% |
| | Maximum Wet Bulb Temperature (operating): 84° F (29° C) |
| | Shock: 1,500 G/0.5-ms |

NOTE:

For solid state disk drives, GB means 1 billion bytes. 16GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity varies by content and will be less than 15.8GB.

Technical Specifications - Input/Output Devices

HP USB Standard Keyboard

| | | | |
|---------------------------------|---|---|--------------------------------|
| Physical characteristics | Keys | 104, 105, 106, 107, 109 layout (depending upon country) | |
| | Dimensions (L x W x H) | 18.0 x 6.4 x 0.98 in 45.8 x 16.3 x 2.5 cm | |
| | Weight | 2 lb 0.9 kg | |
| Electrical | Operating voltage | + 5VDC ± 5% | |
| | Power consumption | 50-mA maximum (with three LEDs ON) | |
| | System interface | USB Type A plug connector | |
| | ESD | CE level 4, 15-kV air discharge | |
| | EMI - RFI | Conforms to FCC rules for a Class B computing device | |
| | Microsoft® PC 99 - 2001 | Functionally compliant | |
| | Mechanical | Languages | 38 available |
| Keycaps | | Low-profile design | |
| Switch actuation | | 55-g nominal peak force with tactile feedback | |
| Switch life | | 20 million keystrokes (using Hasco modified tester) | |
| Switch type | | Contamination-resistant switch membrane | |
| Key-leveling mechanisms | | For all double-wide and greater-length keys | |
| Cable length | | 6 ft (1.8 m) | |
| Microsoft PC 99 - 2001 | | Mechanically compliant | |
| Acoustics | | 43-dBA maximum sound pressure level | |
| Environmental | | Operating temperature | 50° to 122° F (10° to 50° C) |
| | | Non-operating temperature | -22° to 140° F (-30° to 60° C) |
| | Operating humidity | 10% to 90% (non-condensing at ambient) | |
| | Non-operating humidity | 20% to 80% (non-condensing at ambient) | |
| | Operating shock | 40 g, six surfaces | |
| | Non-operating shock | 80 g, six surfaces | |
| | Operating vibration | 2-g peak acceleration | |
| | Non-operating vibration | 4-g peak acceleration | |
| | Drop (out of box) | 26 in (66 cm) on carpet, six-drop sequence | |
| | Drop (in box) | 42 in (107 cm) on concrete, 16-drop sequence | |
| Approvals | UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC | | |
| Ergonomic compliance | ANSI HFS 100, ISO 9241-4, and TUVGS | | |
| Kit contents | Keyboard | Installation Guide | |
| | Warranty Card | Safety and Comfort Guide | |

Technical Specifications - Input/Output Devices

HP PS/2 Standard Keyboard

| | | | |
|---------------------------------|---|---|--|
| Physical Characteristics | Keys | 104, 105, 106, 107, 109 layout (depending upon country) | |
| | Dimensions (L x W x H) | 18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm) | |
| | Weight | 2 lb (0.9 kg) minimum | |
| Electrical | Operating voltage | + 5VDC ± 5% | |
| | Power consumption | 50-mA maximum (with three LEDs ON) | |
| | System interface | PS/2 6-pin mini din connector | |
| | ESD | CE level 4, 15-kV air discharge | |
| | EMI - RFI | Conforms to FCC rules for a Class B computing device | |
| | Microsoft PC 99 - 2001 | Functionally compliant | |
| | Mechanical | Languages | 38 available |
| Keycaps | | Low-profile design | |
| Switch actuation | | 55-g nominal peak force with tactile feedback | |
| Switch life | | 20 million keystrokes (using Hasco modified tester) | |
| Switch type | | Contamination-resistant switch membrane | |
| Key-leveling mechanisms | | For all double-wide and greater-length keys | |
| Cable length | | 6 ft 1.8 m | |
| Microsoft PC 99 - 2001 | | Mechanically compliant | |
| Acoustics | | 43-dBA maximum sound pressure level | |
| Environmental | | Operating temperature | 50° to 122° F (10° to 50° C) |
| | | Non-operating temperature | -22° to 140° F (-30° to 60° C) |
| | | Operating humidity | 10% to 90% (non-condensing at ambient) |
| | | Non-operating humidity | 20% to 80% (non-condensing at ambient) |
| | Operating shock | 40 g, six surfaces | |
| | Non-operating shock | 80 g, six surfaces | |
| | Operating vibration | 2-g peak acceleration | |
| | Non-operating vibration | 4-g peak acceleration | |
| | Drop (out of box) | 26 in (66 cm) on carpet, six-drop sequence | |
| | Drop (in box) | 42 in (107 cm) on concrete, 16-drop sequence | |
| Approvals | UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC | | |
| Ergonomic compliance | ANSI HFS 100, ISO 9241-4, and TUVGS | | |

HP USB Smart Card (CCID) Keyboard

Introduction:

Boost your security, simplify access procedures and reduce the costs associated with managing networks by preventing unauthorized access to your computers and networks using smartcard technology with the HP Smart Card (CCID) Keyboard.

The USB Smart Card (CCID) Keyboard is a full-sized keyboard that takes advantage of digital signatures and certificates to secure the environment for transactions performed on both public and private networks. The USB Smart Card (CCID) Keyboard works with all smart cards that comply with ISO standard 7816.

Smart cards are easy-to-use credit card-sized devices which require multiple forms of information to be validated before you gain access to your accounts or resources. Used worldwide, smart cards strengthen access to a network or other resource using dual-factor authentication. Implementing a two-factor authentication (or multi-factor authentication) process reduces the risk of unauthorized access by verifying and validating your identity in one of the following ways:

- Something you know - a combination of username and password or PIN
- Something you have - a smart card or security token.



Technical Specifications - Input/Output Devices

Something you have (smart card) plus something you know (PIN), improves user-access security within corporate network environments. Smart cards are used in government agencies, healthcare companies and the finance industry.

HP ProtectTools Smart Card Manager provides authentication software for the smart card. The Smart Card Reader module works with the HP ProtectTools Security Manager and enables the user to setup, use, and manage the smart card. This allows strengthened security with HP patented technology.

Key Benefits:

- Protects against unauthorized access with smart card technology
- Delivers even greater security when combined with a HP ProtectTools smart card and the HP ProtectTools Security Software
- Combination of username and password or pin with a smart card or security token
- Secures online transactions using digital signatures and certificates
- Conforms to industry standards for ease of setup and use
- Delivers long product life and quiet operation with high-impact materials and lubricated keys
- Spill drain feature

| | | | |
|----------------------------------|----------------------------------|--|------------------------------|
| Physical Characteristics | Keys | 104, 105, 106, 107, 109 layout (depending upon country) | |
| | Form factor | USB basic smart card keyboard | |
| | Colors | Carbonite/Silver | |
| | Dimensions (H x W x D) | 18.2 x 6.3 x 1.3 in 46.3 x 16.1 x 3.3 cm | |
| Electrical | Weight | 2 lb (0.9 kg) minimum | |
| | Operating voltage | + 5VDC ± 5% | |
| | Power consumption | 100-mA maximum (with four LEDs ON) | |
| | System interface | USB Type A plug connector | |
| | ESD | CE level 4, 15-kV air discharge | |
| | EMI - RFI | Conforms to FCC rules for a Class B computing device | |
| | Microsoft PC 99 - 2001 | Functionally compliant | |
| Mechanical | Languages | 30+ available | |
| | Keycaps | Standard design | |
| | Switch actuation | 55 g nominal peak force with tactile feedback | |
| | Switch life | 20 million keystrokes (using Hasco modified tester) | |
| | Switch type | Contamination-resistant membrane | |
| | Key-leveling mechanisms | For all double-wide and greater-length keys | |
| | Cable length | 6 ft (1.8 m) | |
| | Microsoft PC 99 - 2001 | Mechanically compliant | |
| | Acoustics | 43-dBA maximum sound pressure level | |
| | Environmental | Operating temperature | 50° to 122° F (10° to 50° C) |
| Non-operating temperature | | -22° to 140° F (-30° to 60° C) | |
| Operating humidity | | 10% to 90% (non-condensing at ambient) | |
| Non-operating humidity | | 20% to 80% (non-condensing at ambient) | |
| Operating shock | | 40 g, six surfaces | |
| Non-operating shock | | 80 g, six surfaces | |
| Operating vibration | | 2-g peak acceleration | |
| Non-operating vibration | | 4-g peak acceleration | |
| Drop (out of box) | | 26 in (66 cm) on carpet, six-drop sequence | |
| Drop (in box) | | 42 in (107 cm) on concrete, 16-drop sequence | |
| SmartCard Function | Support | All ISO 7816 smart cards | |
| | Interface | Reads from and writes to all ISO7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1) | |
| | Chipset | SCM STCIII | |
| | Standard APIs supported | PC/SC, EMV2000, CT-API | |
| | Power | USB Port | |
| | | Short circuit detection (protects smart card and reader) | |
| | | Power supply compliant with ISO7816 and EMV (5V, 60 mA) | |
| | Power consumption | 100-mA maximum draw | |
| | Communication | From card | 9600 bps to 330,000 bps |
| | | From computer | 12 Mbps (USB transfer speed) |



Technical Specifications - Input/Output Devices

| | | | |
|---------------------------------|-------------------------------------|---|--|
| | Landing mechanism | Contact device Card insertions rating | Friction contact Up to 100,000 insertion cycles |
| | Interface modes | CCID protocol | |
| | Reader performance interface | USB connection | |
| | Electro-magnetic standards | Europe USA | 2004/108/EC USAFCC part 15 |
| Approvals | | CE-Mark, UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC, EMV2000, USB-IF | |
| Ergonomic Compliance | | ISO 9241-4, TUVGS | |
| Kit Contents | | Keyboard, I/O Security and Documentation CD, warranty card | |
| Smart Card Compatibility | HP | HP ProtectTools Smart Card | |
| | American Express | Amex Blue | |
| | Axalto (Schlumberger) | Cryptoflex 8K Cryptoflex 16K Cryptoflex 32K Cryptoflex 32K e-gate Cyberflex Access 64K Cyberflex Access 32K Cyberflex 32K e-gate Cyberflex 64K Cyberflex Palmera Payflex-S Payflex 1K Payflex 2K Payflex 4K Payflex 8K Prismera US DoD CAC PrimeFlex Store 8K PrimeFlex Store 2K | |
| | Cardlogix | CLXSU004KK4 CLXSU008KK5 | |
| | Safenet, Inc. | Model 300 Model 330 | |
| | De-La Rue | VisaCash | |
| | Gemplus | Gem Espresso GKK32K Gemclub Memo GemClub Micro GemXplore GemSafe | |
| | Infineon | SLE66C322P SLE4406 SLE4406E SLE4406E SE SLE4418 SLE4428 SLE4432 SLE4436E SLE4442 SLE5536 | |
| | SafLink (Litronic) | Forte | |
| | Shart | Java Card | |
| | Oberthur | CosmopolIIC v4 CosmopolIIC v4.1 Cosmo ID-One GalatIIC v2.1 US DoD CAC | |
| | Memory Cards | | |
| | Atmel | AT24C01ASC AT24C02SC AT24C04SC AT24C08SC AT24C16SC AT24C32SC AT24C64SC AT24C128SC | |

Technical Specifications - Input/Output Devices

| | |
|--------------|------------|
| | AT24C256SC |
| | AT24C512SC |
| | AT88SC153 |
| | AT88SC1608 |
| ISSI | IS23SC4418 |
| | IS23SC4428 |
| ST | 14C02 |
| Telefonkarte | SLE4406 |
| | SLE4436 |
| | SLE5536 |
| XICOR | X24026 |

HP USB & PS2 Washable Keyboard

| | | | |
|---------------------------------|--|---|--------------------------------|
| Physical Characteristics | Keys | 104, 105, 106, 107, 109 layout (depending upon country) | |
| | Dimensions (L x W x H) | 18.0 x 6.4 x 0.98 in 45.8 x 16.3 x 2.5 cm | |
| | Weight | 2 lb (0.9 kg) minimum | |
| Electrical | Operating voltage | + 5VDC ±5% | |
| | Power consumption | 50-mA maximum (with three LEDs ON) | |
| | System interface | USB Type A plug connector | |
| | ESD | CE level 4, 15-kV air discharge | |
| | EMI - RFI | Conforms to FCC rules for a Class B computing device | |
| | Microsoft® PC 99 - 2001 | Functionally compliant | |
| | Mechanical | Keycaps | Stepped -profile design |
| Switch actuation | | 55-g nominal peak force with tactile feedback | |
| Switch life | | 20 million keystrokes | |
| Switch type | | Contamination-resistant switch membrane | |
| Key-leveling mechanisms | | For all double-wide and greater-length keys | |
| Cable length | | 7 ft 2.2 m | |
| Microsoft PC 99 - 2001 | | Mechanically compliant | |
| Acoustics | | 43-dBA maximum sound pressure level | |
| Environmental | | Operating temperature | 50° to 122° F 10° to 50° C |
| | | Non-operating temperature | -4° to 149° F -20° to 65° C |
| | Operating humidity | 10% to 95% (non-condensing at ambient) | |
| | Non-operating humidity | 0% to 95% (non-condensing at ambient) | |
| | Operating shock | 40 g, six surfaces | |
| | Non-operating shock | 80 g, six surfaces | |
| | Operating vibration | 2-g peak acceleration | |
| | Non-operating vibration | 4-g peak acceleration | |
| | Drop (out of box) | 26 in (66 cm) on carpet, six-drop sequence | |
| | Drop (in box) | 42 in (107 cm) on concrete, 16-drop sequence | |
| Approvals | UL, cUL, FCC, CE, TUV GS, VCCI, BSMI, C-Tick, KCC, USB-IF, WHQL, EN/IEC 60601-1, IP66/NEMA4X | | |
| Ergonomic compliance | ANSI HFS 100, ISO 9241-4, and TUVGS | | |

Technical Specifications - Input/Output Devices

HP PS/2 Optical Mouse

| | | |
|---|--|---|
| Dimensions (H x L x W) | 1.56 x 2.44 x 4.61 in | |
| | 3.95 x 6.21 x 11.7 cm | |
| Weight | 4.44 oz | |
| | 126 g | |
| Environmental | Operating temperature -32° to 104°F 0° to 40° C | |
| | Non-operating temperature -4° to 140°F -20° to 60° C | |
| | Operating humidity 10% to 90% (non condensing at ambient) | |
| | Non-operating humidity 10% to 90% (non condensing at ambient) | |
| | Operating shock 40 g, 6 surfaces | |
| | Non-operating shock 80 g, 6 surfaces | |
| | Operating vibration 2 g peak acceleration | |
| | Non-operating vibration 4 g peak acceleration | |
| | Drop 80 cm height onto asphalt tile over concrete or equivalent, 5- (out of box) drop in 5 direction except the cable face | |
| | Electrical | Operating voltage 5 VDC ± 10% |
| | | Power consumption 100mA |
| | | System consumption PS/2 mini-din connector |
| | | ESD CE level 4, 15 kV air discharge |
| EMI-RFI Conforms to FCC rules for a Class B computing device | | |
| Microsoft PC99 - 2001 Functionally compliant | | |
| Mechanical | | Resolution 400 ± 20% DPI |
| | Tracking speed 10 in/s (25.4 cm/s) maximum | |
| | Acceleration 100 in/s/s (2.54 m/s/s) | |
| | Switch actuation 61 g nominal peak force | |
| | Switch life 3,000,000 operations (using Hasco modified tester) | |
| | Switch type Low force micro-switches | |
| | Tracking mechanism life 155 mi (250 km) at average speed of 10 in/s | |
| | Cable length 6 ft (1.8 m) | |
| | Microsoft PC99 - 2001 Mechanically compliant | |
| | Scroll wheel | Width 8 mm |
| Diameter 1.01 in (25.6 mm) | | |
| Maximum rotation speed 48 rats/sec | | |
| Switch type Light force micro-switch | | |
| Switch life 1 million operations | | |
| Regulatory Approvals | Mechanical life Minimum 200,000 revolutions | |
| | UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC | |

Technical Specifications - Input/Output Devices

HP USB Optical Mouse

| | |
|----------------------------------|--|
| Dimensions (H x L x W) | 1.5 x 4.5 x 2.5 in 3.8 x 11.6 x 6.3 cm |
| Weight | 0.27 lb 0.12 kg |
| Cable length | 72.8 in 185 cm |
| System requirements | Microsoft Windows 95, 98, 2000, Me, XP and Vista Available USB port |

HP USB Laser Mouse

| | |
|-------------------------------|---|
| Scroll Wheel | 24 |
| Maximum Rotation Speed | 48 rats/sec |
| Switch Type | Wheel |
| Switch Life | Button – 3,000,000 Wheel – 1,000,000 times Tilt switch – 500,000 times |
| Environmental | <p>Operating Temperature 32° to 104° F 0° to 40° C</p> <p>Non-operating Temperature -4° to 140° F -20° to 60° C</p> <p>Operating Humidity 10% to 90% (non-condensing at ambient)</p> <p>Non-operating Humidity 20% to 80% (non-condensing at ambient)</p> <p>Operating Shock 40 g, six surfaces</p> <p>Non-operating Shock 80 g, six surfaces</p> <p>Operating Vibration 2-g peak acceleration</p> <p>Non-operating Vibration 4-g peak acceleration</p> |
| Electrical | <p>Operating Voltage + 5VDC ± 5%</p> <p>Power Consumption</p> <p>MTBF > 150,000 hrs</p> <p>ESD IEC-61000-4-2 criteria B, Contact discharge: +/- 4kV, Air discharge: +/- 8kV</p> <p>EMI-RFI FCC Class B</p> <p>PC98 PC 99 Compliant</p> |
| Mechanical | <p>Resolution 800dpi</p> <p>Tracking Speed 25 cm/sec</p> <p>Acceleration 0.5mm</p> <p>Switch Actuation 0.6N (60gf)</p> <p>Switch Life Button - 3,000,000 Wheel - 1,000,000 times Tilt switch - 500,000 times</p> <p>Cable Length 1850mm</p> <p>PC98-99 PC99 compliant</p> |
| Regulatory Approvals | UL60950-1, UL 94, UL 746 (A-E), UL 796 TUV/GS: EN 60950-1, EN 60825-1 FCC Class B, UL 1950, cUL, TUV GS, CE, C-tick, VCCI, BSMI, RRL |

Technical Specifications - Removable Storage

HP Blu-ray Writer Drive

| | |
|----------------------------------|---|
| AMO Part Number | AR482AA |
| Height | 5.25-inch, half-height, tray-load |
| Orientation | Either horizontal or vertical |
| Interface type | SATA |
| Disc capacity | 50 GB DL or 25 GB standard |
| Dimensions (W x H x D) | 5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 19.0 cm) |
| Weight (max) | 2.0 lb (907 g) |

| | |
|------------------------|----------------------------|
| DVD-ROM | 8.5GB DL or 4.7GB standard |
| Blu-ray | 50GB DL or 25GB standard |
| Full Stroke DVD | < 250 ms (seek) |
| Full Stroke CD | < 210 ms (seek) |
| Blu-ray | < 275 ms (seek) |

(Time to drive ready from tray loading)

Disc Capacity

BD-ROM (SL/DL) 25S / 28S

BD-R (SL/DL) 25S / 28S

BD-RE (SL/DL) 25S / 28S

DVD-ROM (SL/DL) 18S / 18S

Startup Time DVD-R (SL/DL) 25S / 25S

DVD-RW 25S

DVD+R (SL/DL) 25S / 25S

DVD+RW DVD+RW 25S

DVD-RAM 45S

CD-ROM 15S

CD-ROM Read CD-ROM up to 40X

CD-R up to 40X

CD-RW up to 40X

DVD-ROM Read DVD-RAM up to 5X

DVD+RW up to 10X

DVD-RW up to 10X

DVD+R DL up to 8X

DVD-R DL up to 8X

Maximum Data Transfer Rates

DVD-ROM up to 16X

DVD-ROM DL up to 8X

DVD+R up to 12X

DVD-R up to 12X

Blu-ray BD-ROM up to 6X

BD-ROM DL up to 4.8X

BD-R up to 6X

BD-R DL up to 4.8X

BD-R up to 6X

BD-RE SL/DL up to 4.8X

| | | |
|--------------|---------------|--------------------------|
| Power | Source | SATA DC power receptacle |
|--------------|---------------|--------------------------|



Technical Specifications - Removable Storage

| | | |
|--|---|--|
| Environmental (all conditions non-condensing) | DC Power Requirement | 5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p |
| | DC Current | 5 VDC -1000 mA typical, 1600 mA maximum 12 VDC -600 mA typical, 1400 mA maximum |
| | Temperature (operating) | 41° to 122° F (5° to 50° C) |
| | Relative Humidity (operating) | 10% to 90% |
| | Maximum Wet Bulb Temperature (operating) | 86° F (30° C) |

HP SuperMulti DVD Writer Drive

| | |
|-------------------------------|---|
| AMO Part Number | AR630AT |
| Height | 5.25-inch, half-height, tray-load |
| Orientation | Either horizontal or vertical |
| Interface type | Serial ATA |
| Dimensions (W x H x D) | 5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm) |
| Weight (max) | 2.6 lb (1.2 kg) |

| | | | | |
|--------------------------|--------------------------|---|------------------------|-----------------------|
| Performance | CD Media Read Access | Random | < 120 ms typical | |
| | | Full Stroke | < 200 ms typical | |
| | DVD Media Read Access | Random | < 130 ms typical | |
| | | Full Stroke | < 240 ms typical | |
| | CD Media Read Transfer | CD-ROM, CD-R Read | Up to 6000 KB/s (40X) | |
| | | CD-RW Read | Up to 4800 KB/s (32X) | |
| | | Digital/Analog Audio Playback | Up to 2400 KB/s (16X) | |
| | | Digital Audio Extraction (CD-ROM, CD-R) | Up to 6000 KB/s (40X) | |
| | | Digital Audio Extraction (CD-RW) | Up to 4800 KB/s (32X) | |
| | | Video CD Playback | Up to 2400 KB/s (16X) | |
| | | DVD-ROM SL Read | Up to 21600 KB/s (16X) | |
| | | DVD-ROM DL Read | Up to 10800 KB/s (8X) | |
| | | DVD Video Playback | Up to 10800 KB/s (8X) | |
| | | DVD Video SL (other than playback) | Up to 21600 KB/s (16X) | |
| | DVD Media Read Transfer | DVD Video DL (other than playback) | Up to 10800 KB/s (8X) | |
| | | DVD-R | Up to 21600 KB/s (16X) | |
| | | DVD+R | Up to 21600 KB/s (16X) | |
| | | DVD-RW | Up to 10800 KB/s (8X) | |
| | | DVD-R DL | Up to 10800 KB/s (8X) | |
| | | DVD+RW | Up to 10800 KB/s (8X) | |
| | | CD-R Write | Up to 6000 KB/s (40X) | |
| | | CD-RW | 600 KB/s (4X) | |
| | | CD Media Write Transfer | CD-RW (High speed) | 1500 KB/s (10X) |
| | | | CD-RW (Ultra speed) | Up to 3600 KB/s (24X) |
| CD-RW (Ultra speed+) | Up to 4800 KB/s (24X) | | | |
| DVD+R | Up to 21600 KB/s (16X) | | | |
| DVD+R DL (v1.2) | Up to 16200 KB/s (8X) | | | |
| DVD+R DL (v1.1) | Up to 10800 KB/s (8X) | | | |
| DVD+RW (Volume 2 v1.0) | Up to 10800 KB/s (8X) | | | |
| DVD Media Write Transfer | DVD+RW (Volume 1 v1.3) | Up to 5400 KB/s (4X) | | |
| | DVD-R (v2.1 rev. 6.0) | Up to 16200 KB/s (12X) | | |
| | DVD-R (v2.1 rev. 4.0) | Up to 21600 KB/s (16X) | | |
| | DVD-R DL (v3.0 rev. 5.0) | Up to 10800 KB/s (8X) | | |
| | DVD-R DL (v3.0 rev. 3.0) | Up to 10800 KB/s (8X) | | |
| | DVD-RW (v1.2 rev. 3.0) | 8100 KB/s (6X) | | |
| | DVD-RW (v1.2 rev. 2.0) | Up to 5400 KB/s (4X) | | |



Technical Specifications - Removable Storage

| | | | |
|--|-------------------------------------|--|--------------------------------------|
| | | DVD-RAM (v2.2 rev. 5.0) | Up to 16200 KB/s (5X) |
| | | DVD-RAM (v2.2 rev. 2.0) | Up to 6750 KB/s (5X) |
| Media Compatibility | Media | Read | Write |
| | CD-ROM | Yes | No |
| | CD-R | Yes | Yes |
| | CD-RW | Yes | Yes |
| | DVD-ROM | Yes | No |
| | DVD-ROM DL | Yes | No |
| | DVD-RAM | Yes | Yes |
| | DVD+R | Yes | Yes |
| | DVD+R DL | Yes | Yes |
| | DVD+RW | Yes | Yes |
| | DVD-R | Yes | Yes |
| | DVD-RW | Yes | Yes |
| | | DVD-R DL | No |
| | Source | SATA DC power receptacle | |
| Power Supply | DC Power Requirement | 5 VDC ± 5% | 100 mV ripple p-p |
| | | 12 VDC ± 5% | 200 mV ripple p-p |
| | DC Current | 5 VDC | <1000 mA (typical) 1600 mA (max.) |
| | | 12 VDC | 1200 mA (typical) 2000 mA (max.) |
| | Total Drive Power (Standby Mode) | < 2.5W | |
| Rear Panel | SATA Power Connector, 15-pin | | |
| | SATA Data Connector, 7-pin | | |
| | Markings to identify each connector | | |
| Environmental conditions (all conditions non-condensing) | Temperature (operating) | 41° to 122° F (5° to 50° C) | |
| | Temperature (storage) | -22° F to 140° F (-30° C to 60° C) | |
| | Relative Humidity | 10% to 90% | |
| | Maximum Wet Bulb Temperature | 86° F (30° C) | |
| | Altitude | 0 to 10,171 ft. (0 to 3,100 meters) | |

HP DVD-ROM Drive

| | | | |
|-------------------------------|---|---|------------------------|
| AMO Part Number | AR629AA | | |
| Height | 5.25-inch, half-height, tray-load | | |
| Orientation | Either horizontal or vertical | | |
| Interface type | Serial ATA | | |
| Dimensions (W x H x D) | 5.8 x 1.7 x 6.9 in (14.8 x 4.2 x 17.5 cm) | | |
| Weight (max) | 2.1 lb (950 kg) | | |
| Performance | CD Media Read Access | Random | < 120 ms typical |
| | | Full Stroke | < 200 ms typical |
| | DVD Media Read Access | Random | < 130 ms typical |
| | | Full Stroke | < 240 ms typical |
| | CD Media Read Transfer | CD-ROM, CD-R Read | Up to 6000 KB/s (40X) |
| | | CD-RW Read | Up to 4800 KB/s (32X) |
| | | Digital/Analog Audio Playback | Up to 2400 KB/s (16X) |
| | CD Media Read Transfer | Digital Audio Extraction (CD-ROM, CD-R) | Up to 6000 KB/s (40X) |
| | | Digital Audio Extraction (CD-RW) | Up to 4800 KB/s (32X) |
| | | Video CD Playback | Up to 2400 KB/s (16X) |
| | | DVD-ROM SL Read | Up to 21600 KB/s (16X) |
| | | DVD-ROM DL Read | Up to 10800 KB/s (8X) |
| | DVD Video Playback | Up to 10800 KB/s (8X) | |



Technical Specifications - Removable Storage

| | | | |
|---|-------------------------------------|--|------------------------|
| | | DVD Video SL (other than playback) | Up to 21600 KB/s (16X) |
| | DVD Media Read Transfer | DVD Video DL (other than playback) | Up to 10800 KB/s (8X) |
| | | DVD-R | Up to 21600 KB/s (16X) |
| | | DVD+R | Up to 21600 KB/s (16X) |
| | | DVD-RW | Up to 10800 KB/s (8X) |
| | | DVD-R DL | Up to 10800 KB/s (8X) |
| | | DVD+RW | Up to 10800 KB/s (8X) |
| | Media | Read | Write |
| Media Compatibility | CD-ROM | Yes | No |
| | CD-R | Yes | No |
| | CD-RW | Yes | No |
| | DVD-ROM | Yes | No |
| | DVD-ROM DL | Yes | No |
| | DVD-RAM | Yes | No |
| | DVD+R | Yes | No |
| | DVD+R DL | Yes | No |
| | DVD+RW | Yes | No |
| | DVD-R | Yes | No |
| | DVD-RW | Yes | No |
| | DVD-R DL | Yes | No |
| | Source | SATA DC power receptacle | |
| Power Supply | DC Power Requirement | 5 VDC ± 5% | 100 mV ripple p-p |
| | | 12 VDC ± 5% | 200 mV ripple p-p |
| | 5 VDC | 1000 mA (typical) 1600 mA (max.) | |
| DC Current | 12 VDC | 1200 mA (typical) 2000 mA (max.) | |
| | Total Drive Power (Standby Mode) | < 2.5W | |
| Rear Panel | SATA Power Connector, 15-pin | | |
| | SATA Data Connector, 7-pin | | |
| Environmental conditions (all conditions non-condensing) | Markings to identify each connector | | |
| | Temperature (operating) | 41° to 122° F (5° to 50° C) | |
| | Temperature (storage) | -22° F to 140° F (-30° C to 60° C) | |
| | Relative Humidity | 10% to 90% | |
| | Maximum Wet Bulb Temperature | 86° F (30° C) | |
| | Altitude | 0 to 10,171 ft. (0 to 3,100 meters) | |

Technical Specifications - Removable Storage

HP 22-n-1 Media Card Reader

USB 2.0 High-speed interface

USB Interface

NOTE:

Requires the USB cable to be connected to the internal USB 2.0 port or a USB 2.0 PCI card.

Supports hardware ECC (Error Correction Code) function

Supports hardware CRC (Cyclic Redundancy Check) function

Supports MS 4-bit parallel transfer mode

Supports MS-PRO 4-bit parallel transfer mode

Advance protocol support

Supports MS PRO-HG Duo 4-bit parallel transfer mode

Supports SD 4-bit parallel transfer mode

Supports high-speed 50Mhz SD 4-bit card (version 2.0)

Supports high-speed 52Mhz MMC 8-bit card (version 4.2)

Supports CF v4.0 with PIO mode 6 and Ultra DMA mode

CompactFlash Type I

CompactFlash Type II

Microdrive

MultiMediaCard (MMC)

Reduced Size MultiMediaCard (RS MMC)

MultiMediaCard 4.2 (MMC Plus, including MMC Plus HC)

Reduced Size MultiMediaCard 4.2 (MMC Mobile, including MMC Mobile HC)

Secure Digital Card (SD)

Secure Digital High Capacity (SDHC)

miniSD

miniSD High Capacity

Supported media type

Micro SD (T-Flash)

Micro SD HC

Memory Stick

Memory Stick Select

Memory Stick Duo (MS Duo)

Memory Stick PRO (MS PRO)

Memory Stick PRO Duo (MS PRO Duo)

Memory Stick PRO-HG Duo

MagicGate Memory Stick (MG)

MagicGate Memory Stick Duo

xD-Picture Card

Supported media type with card adapter

Memory Stick Micro (M2)

MMC Micro

Technical Specifications - Eco Data

Eco-Label Certifications & declarations

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US ENERGY STAR ®
- IT ECO declaration
- EPEAT Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country

Small Form Factor

| Energy Consumption | 115 VAC | 230 VAC | 100 VAC |
|------------------------------------|-----------|-----------|-----------|
| Normal Operation | 30.9181 W | 31.1382 W | 30.9441 W |
| Sleep (Energy Star low power mode) | 2.0709 W | 2.2871 W | 2.0928 W |
| Off | 0.8967 W | 1.0717 W | 0.8803 W |

NOTE:

Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family . HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured model.

| Heat Dissipation* | 115 VAC | 230 VAC | 100 VAC |
|-------------------|------------|------------|------------|
| Normal Operation | 106 BTU/hr | 106 BTU/hr | 106 BTU/hr |
| Sleep | 7 BTU/hr | 8 BTU/hr | 7 BTU/hr |
| Off | 3 BTU/hr | 4 BTU/hr | 3 BTU/hr |

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions

(in accordance with ISO 7779 and ISO 9296)

| System Fan Off | Sound Power (LWAd, bels) | Sound Pressure (LpAm, decibels) |
|-------------------------------|-----------------------------|------------------------------------|
| Idle | 3.8 | 28 |
| Fixed Disk (random writes) | 3.8 | 28 |

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight:

Battery Size

CR2032 (coin cell)

Battery type

Lithium

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product contains 4.10% post consumer recycled plastic (by wt.)
- This product is 93.8% recyclable when properly disposed of at end of life.

Packaging Materials

- External:
 - Corrugated 1966 g
- Internal:
 - Polyethylene low density Foam 154 g
- The corrugated packaging material contains at least 38.38% recycled content.
- The Polyethylene low density Foam packaging material contains at least 60.42% recycled content.

Technical Specifications - Eco Data

Microtower

| Energy Consumption (typically configured) | 115 VAC | 230 VAC | 100 VAC |
|---|-----------|-----------|-----------|
| Normal Operation | 31.8271 W | 32.8944 W | 31.7856 W |
| Sleep (Energy Star low power mode) | 2.0348 W | 2.2596 W | 2.0193 W |
| Off | 0.8515 W | 1.0293 W | 0.8358 W |

NOTE:

Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured model.

| Heat Dissipation (typically configured)* | 115 VAC | 230 VAC | 100 VAC |
|--|------------|------------|------------|
| Normal Operation | 109 BTU/hr | 112 BTU/hr | 109 BTU/hr |
| Sleep | 7 BTU/hr | 8 BTU/hr | 7 BTU/hr |
| Off | 3 BTU/hr | 4 BTU/hr | 3 BTU/hr |

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions

(in accordance with ISO 7779 and ISO 9296)

| System Fan Off | Sound Power (LWAd, bels) | Sound Pressure (LpAm, decibels) |
|----------------------------|--------------------------|---------------------------------|
| Idle | 3.9 | 28 |
| Fixed Disk (random writes) | 3.9 | 28 |

Batteries This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater than 5ppm by weight
- Cadmium greater than 10ppm by weight:

Battery Size

CR2032 (coin cell)

Battery type

Li-Ion

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product contains 0.13% post consumer recycled plastic (by wt.)
- This product is 92.4% recyclable when properly disposed of at end of life.

Packaging Materials

- External
 - Corrugated Carton - 1950 g
- Internal
 - Polyethylene low density foam - 205 g
- The corrugated packaging material contains at least 31.38% recycled content.
- The Polyethylene low density Foam packaging material contains at least 60.42% recycled content.

Technical Specifications - Eco Data

All Models**RoHS Compliance**

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at: http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

Technical Specifications - Eco Data

Copyright © 2012 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows, Windows 7, and Windows Vista are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel, Core 2 Quad, Core 2 Duo, Pentium and Celeron are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.