



Horizontal Cable Managers — Installation AR8612, AR8603A, AR8605, AR8606, AR8600A, AR8602A

Inventory


Horizontal Cable Managers

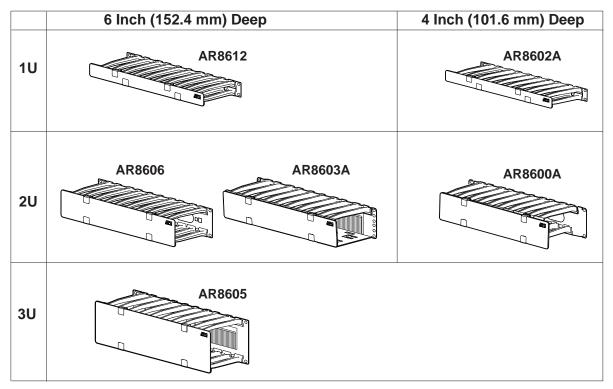

Hardware



Tools required (not provided)




How to install and remove caged nuts

ACAUTION

FALLING EQUIPMENT

To ensure equipment installs securely, install cage nuts with tabs engaging the left and right sides of the square hole. Do NOT install cage nuts with tabs engaging the top and bottom of the square hole.

Failure to follow these instructions can result in injury or equipment damage.




To install a cage nut:

- 1. From the inside of the enclosure insert the cage nut into the square hole by hooking a tab from one side of the cage nut onto one side of the opening.
- 2. Place the cage nut tool onto the tab on the opposite side of the cage nut and pull to snap it into position.

To remove a caged nut:


1. Squeeze the tabs together to release.




Installation


Adjust the vertical mounting rails

Adjust the depth of the vertical mounting rails, if needed, for non-networking enclosures.







Install the Horizontal Cable Manager

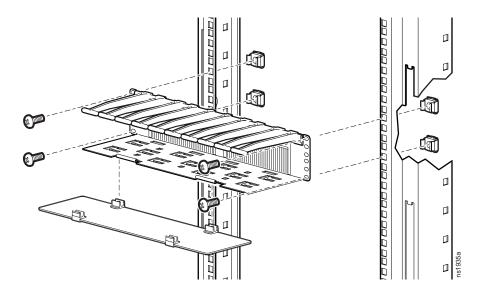


Installing back-to-back Horizontal Cable Managers

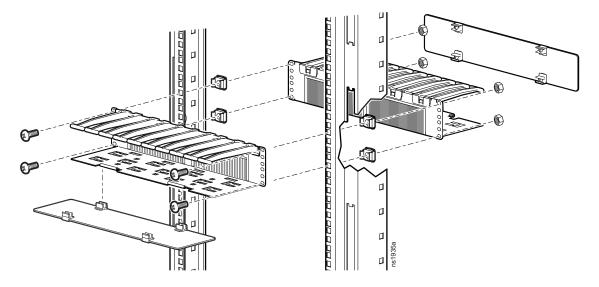


Cover Operation

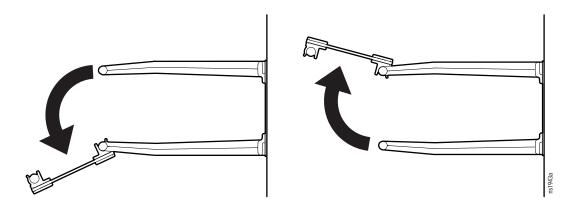

Accessories (not provided)



Cable retainer AR8621



Side channel cable trough AR8016ABLK, AR8008BLK

Customer support and warranty information is available at the APC Web site, www.apc.com.

© 2013 APC by Schneider Electric. All rights reserved. APC, the APC logo and all APC trademarks are property of Schneider Electric S.A.S. Other trademarks are property of their respective owners.

990-4898-001 2/2013