
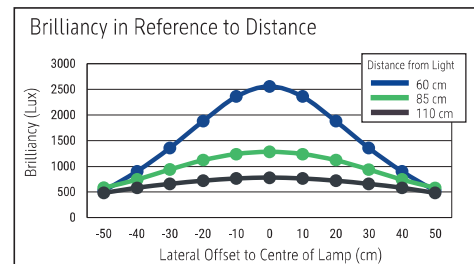
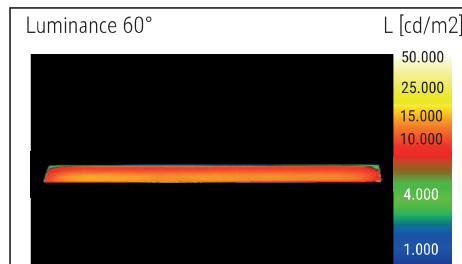



LED floor lamp MAULjet

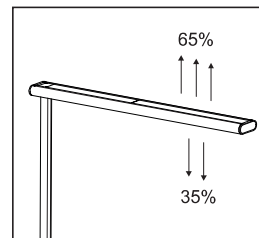

- **Powerful direct light for the work surface and indirect light for room lighting**
- **Unbeatable price/performance ratio**
- **Upward light dispersion 65 % and downward light dispersion 35 %**
- **Long aluminium lamp head for low-shadow light from above, soft dimming of light through diffuser material**
- **Sturdy: Aluminium column, steel base**
- **Nothing is in the way: Cut-out foot plate can be positioned around a table leg**
- **Technical safety concept Made by MAUL**
- Extremely economical: State-of-the-art LED technology
- Convenient: Diffuser for reduction of shades
- Light source and operating device replaceable by an electrician
- Recyclable packaging

Illuminance of the : indirect: 1.520 lux illuminance at 85 cm distance, 920 lux illuminance at 110 cm distance - direct: 1.280 lux illuminance at 85 cm distance, 780 lux illuminance at 110 cm distance
 Colour temperature per light source: 4.000 Kelvin (neutral white)
 Number of light sources: 2
 Energy efficiency class per light source: indirect: D (spectrum A to G) & direct: E (spectrum A to G)
 Weighted energy consumption per light source: 42 kWh/1000 h (21 kWh/1000 h & 21 kWh/1000 h)
 Service life L70B50 per light source: 50.000 h
 Useful luminous flux per light source: 5.835 Lumen (3.218 Lumen & 2.617 Lumen)
 Base: base
 Material: Head: Aluminium - Column: Aluminium - Foot: steel - Base: anti-slip protection pads
 Dimensions: Height: 195 cm - Head: 95 x 9.8 x 3.7 cm - Column: 2.8 x 4.7 cm - Base: 50 x 22.5 cm
 Movement: Head: fixed - Arm: fixed
 Position of the switch: Lamp head

- Guarantee: 2 years

Art. No.	Colour	EAN-Code	Tariff-No.	Cable length (approx.)	Protection class	Pack size / PU	Weight	PU
8257402	white	4002390081092	94052190	1.80 m	I shock-proof plug	120,5 x 32 x 13 cm	9.204 kg	1 pc(s).
8257495	silver	4002390075565	94052190	1.80 m	I shock-proof plug	120,5 x 32 x 13 cm	9.204 kg	1 pc(s).