
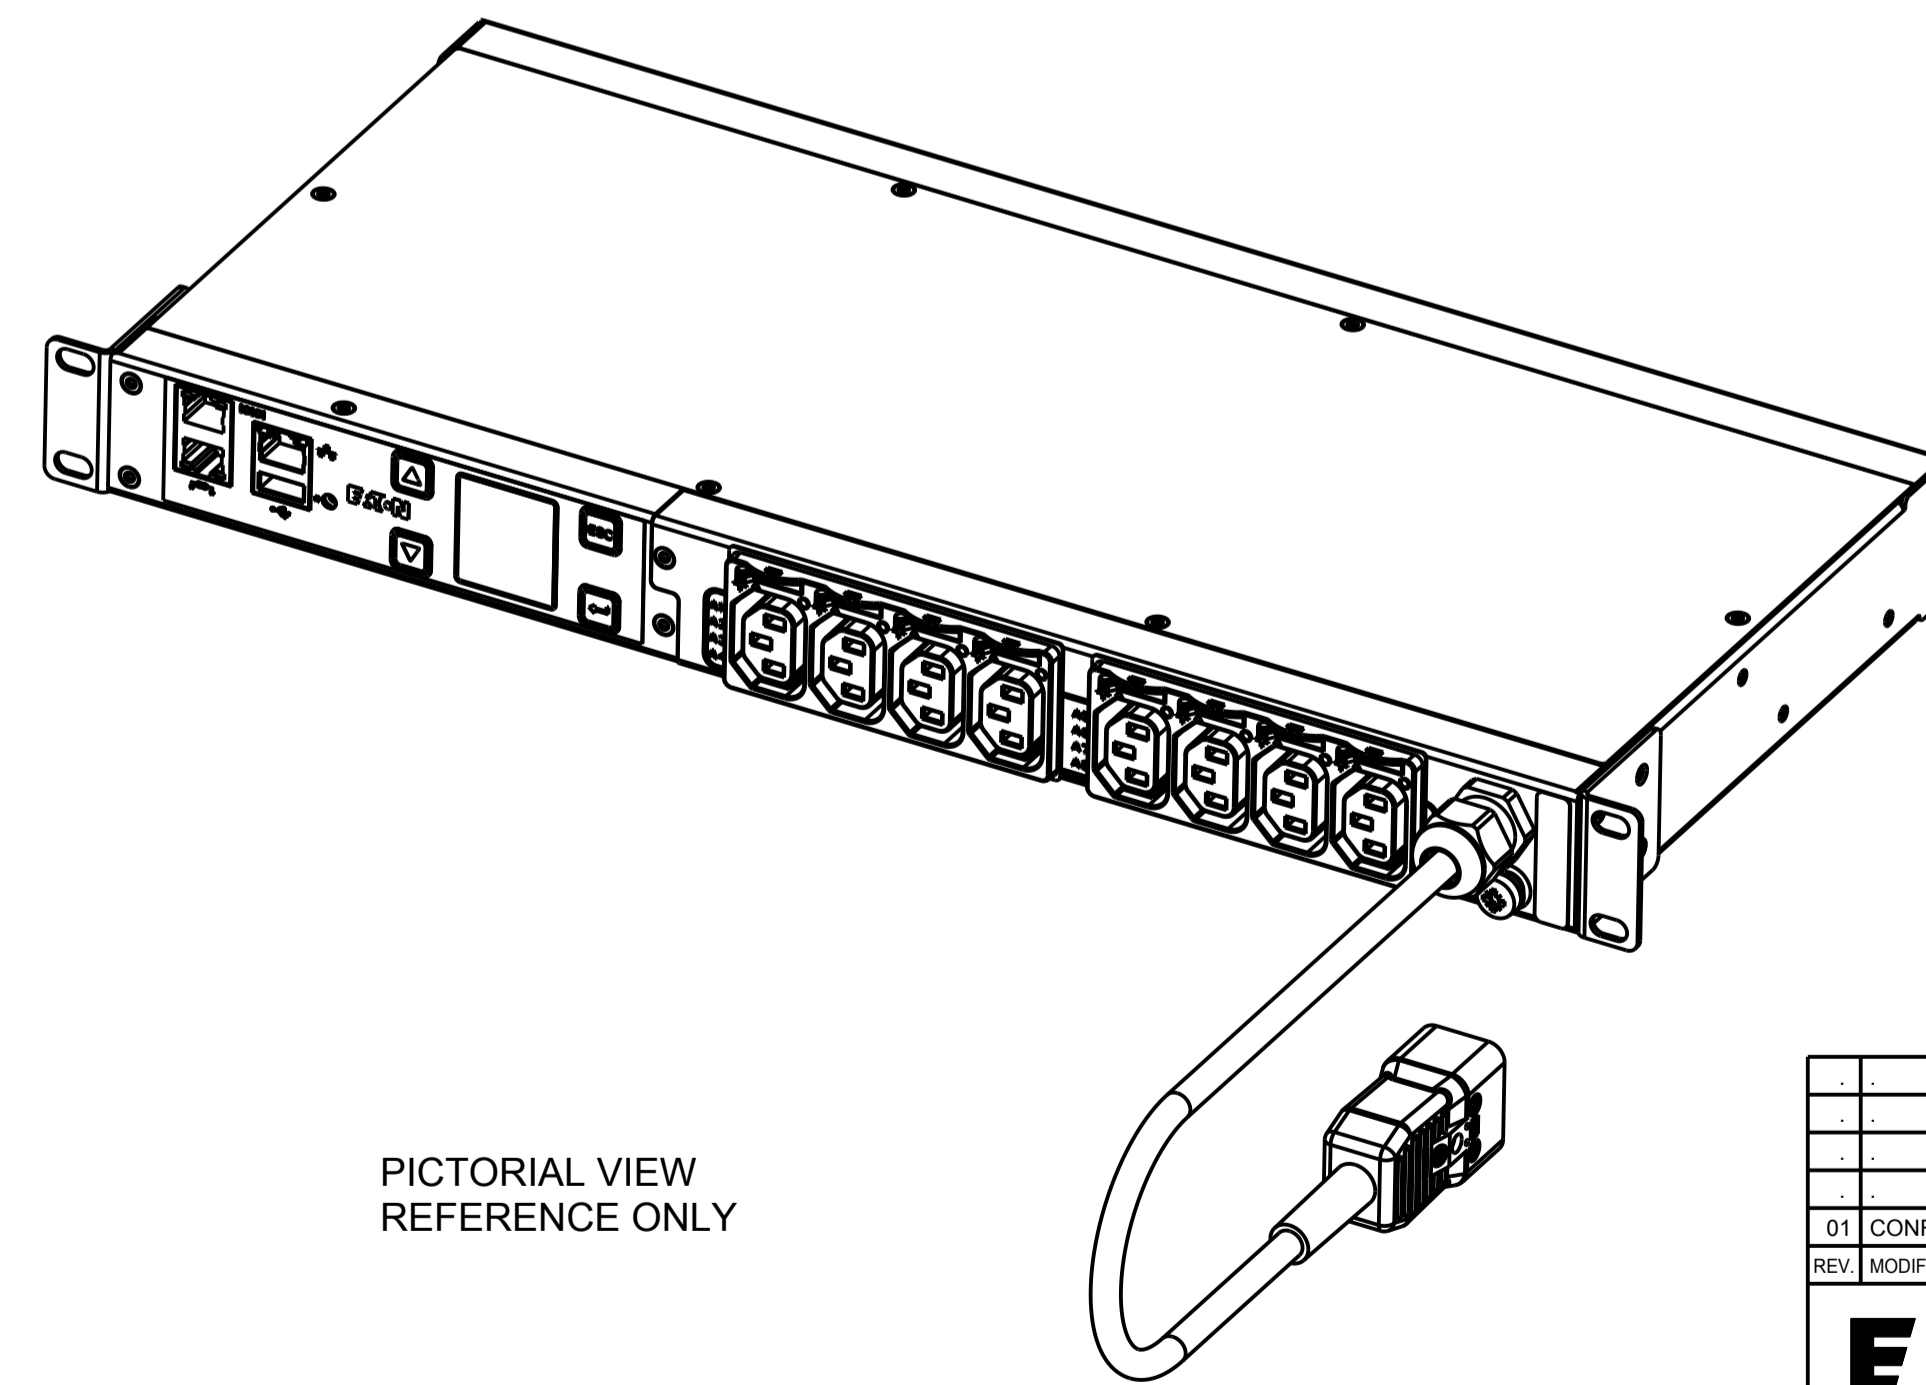


CABLE SHOWN NOT TO SCALE

CIRCUIT SCHEMATIC

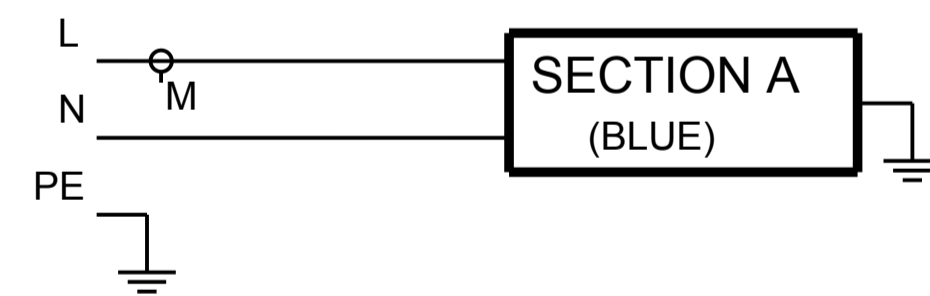

PICTORIAL VIEW REFERENCE ONLY

EMIH28		G3 METERED INPUT	
FUNCTIONALITY	INPUT	OUTPUT	ENVIRONMENTAL
CURRENT POWER AND ENERGY METERING FOR INPUT AND BRANCH	IEC 60309 C20 16A 230V~ W+N+PE 1.5MM HO5 POWER CORD CABLE LENGTH: 3.0 M	(8) IEC 60320 C13 GRIP	0 TO 60 °C
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
LENGTH: 203.2 MM WIDTH: 444.5 MM DEPTH: 42.9 MM ALUMINIUM CHASSIS, BLACK 19 INCH RACK MOUNT	1Ø; 200-240V~;W+N+PE 50/60HZ 16A	200-240V~;50/60HZ 10A PER C13 16A MAX TOTAL	CE, CB
CIRCUIT BREAKERS	FILTER AND SPIKE/SURGE	ACCESSORIES	CONFIGURATION
NONE	NONE	STANDARD KSP011 - 1U INSTALL NETWORK PACK OPTIONAL EMP001 - ENVIRONMENTAL PROBE	EMI3CXHFABB13AM

01 CONFIGURATION NUMBER CORRECTION, WAS: EMI3CCHFABB13AM		18.05.2016	CW	MB
REV	MODIFICATION	DATE	DESSIN/DRAW	VERIF
EAT·N HEINEMANN PRODUCTS		VUE/VIEW EUROPE: 1/2	N° MAG	EMIH28
CH-1345 LE LIEU SWITZERLAND		DESSINE LE / DRAWED THE	PAR / BY	29.02.2016 CW
TOLERANCE GENERALE / GENERAL TOLERANCE		VERIFIE PAR / VERIFIED BY MB		
TRAITEMENT / FINISH NA				
MATIERE / MATERIAL NA				
NIVEAU DU CERTIFICAT DE SOUMISSION REQUIS / SAMPLES APPROVAL PROCESS REPORT X		DIMENSIONS AND TOLERANCES IN MILLIMETERS		
DESIGNATION	EPDU MI 1U (C20 16A 1P)C13X8	SK-77119-Y1	01	
COTES A CONTROLER / INSPECTION DIMENSIONS	XX.XX	COTES FONCTIONNELLES / FUNCTIONAL DIMENSIONS	# XX.XX	NUMERO DU PLAN / PLAN NUMBER
Ce document est propriété de Eaton Industries Manufacturing GmbH. Duplication interdite sans autorisation. This document is Eaton Industries Manufacturing GmbH property. Duplication forbidden without authorization.				