




Delock Adapter SAS HDD $> 2 \times SATA$

Description

The Delock Backplane adapter can be connected to a SAS HDD and supports Hot Swap, Dual-Porting (Active-Active-Mode) and channel bundling with SAS HDDs. The adapter can also be used with SATA HDDs.

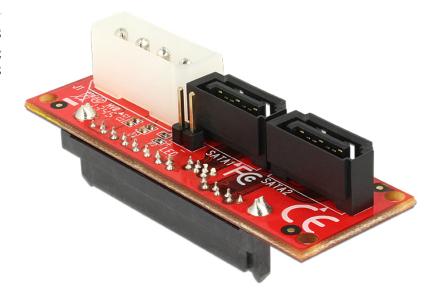

Specification

- Connector:
 - 1 x SAS 6 Gb/s 29 pin female (SFF 8482)
- 2 x SATA 6 Gb/s 7 pin female
- 1 x 4 Pin power connector (12 V and 5 V)
- 1 x LED Pin Header
- Data transfer rate up to 6 Gb/s
- Supports Hot Swap
- Supports Dual-Porting (Active-Active-Mode)
- Dimensions (LxWxH): ca. 61 x 21 x 21 mm
- OS independent, no driver installation necessary

System requirements

- SAS drive with 29 pin connector
- Controller with SATA 7 pin connector
- Connection cables

Item No. 62469



EAN	4043619624690
Country of origin	Taiwan, Republic of
	China

Package content

- Adapter
- User manual

Package

Box

Images

