



Airtame Hub + Core

The hardware-enabled software platform

Elevate every meeting environment with Airtame Hub + Core – an advanced solution that harmonizes high-performance 4k digital signage and wireless presentation capabilities. Experience the added advantage of remote management, allowing you to control these functions from any location.


Any user can effortlessly share their screens in seconds from various operating systems, including MacOS, Windows, ChromeOS, Linux, iOS, and Android. From a browser or with the dedicated app, Google Cast, AirPlay, or Miracast, you can share from PCs, laptops, tablets, or smartphones.

The included hardware, the Airtame Hub, includes HDMI, Ethernet (PoE+ supported), and USB ports. The Airtame Hub is tamper-proof and Kensington lock-compatible, ensuring setup integrity. Mount the Hub on a wall or place it on a surface.

For IT administrators, our cloud-based management system, the Airtame Cloud, allows seamless connectivity to Airtame-enabled screens. It enables you to bulk-edit settings, configure and schedule digital signage content, manage power schedules, and update firmware for multiple screens simultaneously, from anywhere in the world.


Airtame Core is sold as a service plan that includes your hardware with a 3-year warranty, and a renewable 3-year software subscription.

Software Specifications

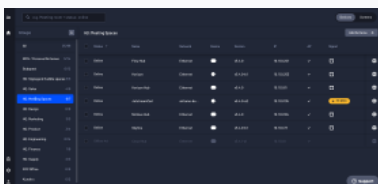


Remote management

- Access devices from anywhere in the world
- Scheduled power management
- Manual firmware updates
- Scheduled firmware updates
- Device Alert
- Edit name, network connectivity and basic security settings

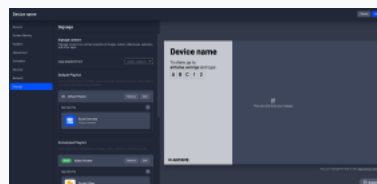

Digital signage

- Digital Signage playlist
- Digital Signage integrations
- Meeting room overview
- Welcome Screen with meeting room booking status
- Home Screen with custom icon and background
- Public website URL

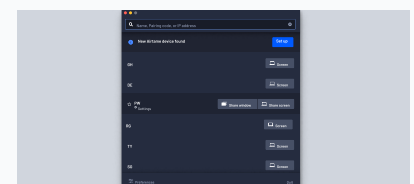

Screen sharing

- Share windows or whole screen
- Native protocols (Miracast, AirPlay, Google Cast)
- Video and Audio sharing

Hardware Specifications

Model Number: AT-CD1

Interface

HDMI Out:	2
USB:	2x Type A, 1x Type C
Network:	10/100/1000 Ethernet
WiFi:	802.11a/b/g/n/ac, RSDB
Bluetooth:	5.2

Software

Operating System:	Airtame OS (Linux Based)
Device Management:	Airtame Cloud

Environment

Ambient Operating Temperature:	0 to 45 °C (32 to 113 °F)
Operating Altitude:	0 - 2000 MSL

Warranty

EU:	3 year - Hardware
NA:	3 year- Hardware

Power Input

PoE IEEE 802.3st Type 2 PoE+ (RJ45 Connector)
42.5-57V - max 30W
DC Power Port (IEC 60120-10:1971 Type A: 5.5mm OD 2.1mm ID)
12v - max 30W

Security

Web/Cloud Transport Encryption:	TLS
Device APU Security:	With password (SRP)
Streaming Encryption:	AirPlay, Miracast
Conferencing Encryption:	TLS, WebRTC
Physical Security:	Custom Tamperproofing, Kensington lock compatible








Device Dimensions

Height:	56.4 mm (2.22 in)
Width:	159.5 mm (6.28 in)
Depth:	227.5 mm (8.96 in)

Box Dimensions

Height:	317 mm (12.5 in)
Width:	191 mm (7.5 in)
Depth:	63 mm (2.5 in)

What's in the box

Airtame Hub	HDMI cable (1m/y)	Mounting Plate	Wall screws	Wall plugs	3M Command Strips	User Manual
						

Airtame Power Adapter is sold separately

Accessories