



Mini GaN Charger 70W with Display & USB-C cable

PN: 32059

Delivering up to 70W of power across three connections, this mini GaN charger lets you power your laptop, tablet, and smartphone simultaneously. A built-in TFT display provides real-time charging data, while advanced GaN and PPS technologies ensure efficient, cool, and reliable performance. The integrated USB-C cable adds extra convenience—so you're always ready to charge without carrying additional cables.

- Compact 70W GaN wall charger
- Charge laptops, tablets and smartphones
- Advanced Gallium Nitride (GaN) technology
- Features one retractable USB-C PD 3.0 70W cable, one USB-C PD 3.0 port and one USB-A QC 3.0 port
- Charge up to three devices simultaneously
- USB-C Power Delivery (PD 3.0) with PPS support
- Delivers up to 70W output
- Built-in real-time power display shows live charging wattage and power delivery status
- Intelligent charging technology automatically adjusts power output to connected devices
- Worldwide 100–240V voltage support, ideal for international use
- Includes short circuit protection, over voltage, over current and over temperature protection
- Includes interchangeable UK, EU adapters and integrated US plug



Supports
PD 3.0 & QC 3.0



TFT Display



Retractable
USB-C® cable 80cm



Mini GaN Charger 70W with Display & USB-C cable



PN: 32059

Product Specifications

- Fireproof PC material
- Voltage Input: AC 100~240 V 50/60 HZ 1.7 A
- **USB-C1** (Integrated Cable) Output **PD 3.0 (PPS)**: 5.0-20.0 V = 3.25 A, 5.0 V = 3.0 A, 9.0 V = 3.0 A, 12.0 V = 3.0 A, 15.0 V = 3.0 A, 20.0 V = 3.25 A, 20.3 V = 3.45 A (70.0 W max.)
- **USB-C2** Port Output **PD 3.0 (PPS)**: 5.0-20.0 V = 3.25 A, 5.0 V = 3.0 A, 9.0 V = 3.0 A, 12.0 V = 3.0 A, 15.0 V = 3.0 A, 20.0 V = 3.25 A, 20.3 V = 3.45 A (70.0 W max.)
- **USB-A** Port Output **QC 3.0**: 5.0 V = 3.0 A, 9.0 V = 3.0 A, 12.0 V = 3.0 A, 20.0 = 3.0 A (60.0 W max.)

- Storage Temperature: -25 °C to +40 °C
- Operating Temperature: 0 °C to +35 °C
- Operating Humidity: 20% -80%
- RoHS REACH: Yes
- Short circuit, Over-voltage, Over-current, Over-temperature protections

PN	# Devices	USB-C Cable	USB-C	USB-A	Max Total Output	Power Delivery	QC
32059	3	1 x 70W	1 x 70W	1 x 60W	70W	PD 3.0	3.0


Languages

Front of pack: English (Product description also in French)

Back of pack: English, French, German, Dutch, Italian, Spanish, Portuguese, Polish, Russian, Czech, Hungarian, Serbian, Greek, Croatian, Traditional Chinese, Simplified Chinese, Korean, Japanese



Quick Installation Languages

English, French, German, Traditional Chinese,
Technical support text: English, French, German ,
Dutch, Italian, Spanish, Portuguese, Polish, Russian,
Czech, Hungarian, Serbian, Greek, Croatian,
Traditional Chinese, Simplified Chinese, Korean,
Japanese

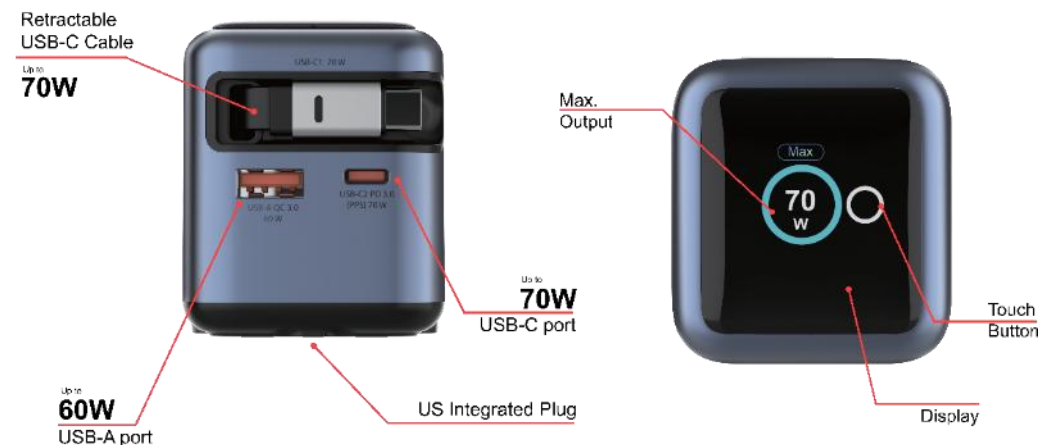

Display modes

Opening sequence

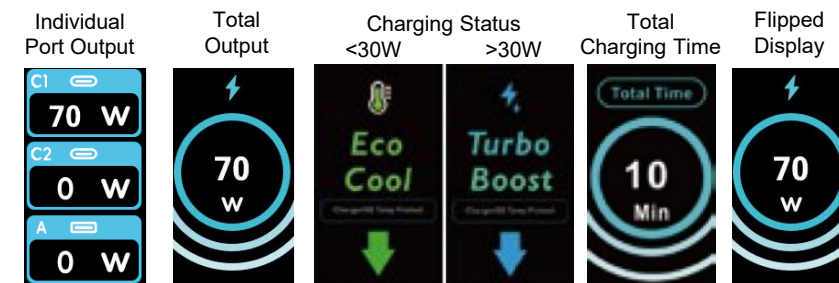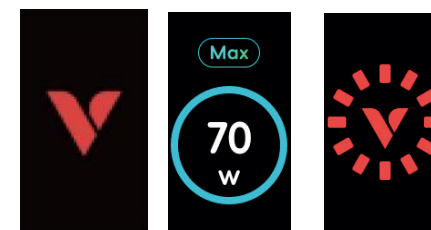

Mini GaN Charger 70W with Display & USB-C cable



Reorder No.	Description	Tariff Code	Barcode	EAN-128	EAN-14
32059	Verbatim Mini GaN Charger 70W with Display and USB-C cable	85044095900	023942320593	(02)00023942320593(37)06(91)864 (02)00023942320593(37)24(91)864	20023942320597 50023942320598

Reorder No.	
Product Dimensions L x W x H	50 x 54.5 x 65.2 mm
Product Weight	228,5 g
Units per Pack	1
Pack Dimensions L x W x H	97 x 62 x 102 mm
Pack Weight	298 g
Packs per Inner Carton (MOQ)	6
Inner Carton Dimensions L x W x H	390 x 103 x 115 mm
Inner Carton Weight	1876 g
Packs per Outer Carton	24
Outer Carton Dimensions L x W x H	410 x 225 x 255 mm
Outer Cartons Weight	8034 g
Outer Cartons per Layer	12
Layers per Pallet	4
Packs per Pallet	1152



Pack Content

- GaN Charger 70W
- EU and UK Adapters
- Quick Start Guide