


ASUS BE24EQSK

Video Conferencing Monitor



Key Features

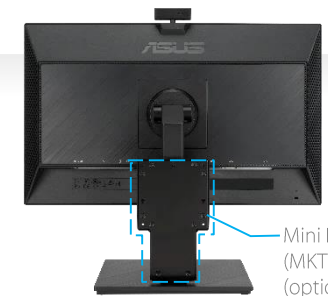

Low Blue Light & Flicker Free

Mini PC kit (MKT02) (optional)



Optimized for the finest image and color quality with 178° wide-viewing-angle



Webcam with Mic Array

Built in adjustable 2MP 1080p webcam, mic array plus stereo speakers deliver better online communication



DisplayPort

Extensive connectivity with DisplayPort, HDMI, D-sub, Audio in, Earphone jack




4-way Ergonomic Stand

Ergonomically-designed stand with tilt, swivel (+180° ~ -180°), pivot, and height adjustments



Wall Mountable

Space saving from compatible VESA mount standard (100 x 100 mm) and bundled ASUS miniPC kit(optional)



Frameless Design

Frameless panel design for an ideal multi display setup



Flicker-free

ASUS Flicker-Free Technology clears out the distracting flicker, and brings viewing comfort.



Ultra-low Blue Light

Four levels of Blue Light Filter help users effectively reduce harmful blue light from the screen by tasks.



Complied with ENERGY STAR® for environmental protection & money saving





Specification

Display	Panel Size(diagonal)	23.8"(60.47cm) Wide Screen (16:9)
	Display Viewing Area(HxV)	527.04 x 296.46 mm
	Panel Type	IPS
	Display Surface	non-glare
	Color Saturation	72% NTSC
	True Resolution	1920 x 1080
	Pixel Pitch	0.2745 mm
	Brightness (Max.)	300cd/m ²
	Contrast Ratio (Max.)	1000:1
	ASUS Smart Contrast Ratio(ASCR)	100,000,000:1
	Viewing Angle (CR _≥ 10)	178°(H)/178°(V)
	Display Colors	16.7 million
Response Time	5ms (GTG)	
Video Features	Splendid Video Intelligence Tech.	Yes
	Skin-Tone Selection	3 modes
	Color Temperature Selection	4 modes (Cool/Normal/Warm/User)
	HDCP support	Yes (1.4)
	QuickFit	Yes
	Blue Light Filter	Yes
Webcam (built-in)	Yes (2M 1080p; Swivel +180° ~ -135°, Tilt +10° ~ -10°)	
Audio Features	Stereo Speaker	2W x 2 stereo, RMS
Input/ Output	HDMI(v1.4), DisplayPort 1.2, D-Sub, Audio-in, Earphone jack, Mic Array, USB port(upstream for webcam)	
Signal Frequency	Digital/ Analog Signal Frequency	30~83 KHz(H) / 50~76 Hz(V)
Power	Power Consumption	<15 W* ¹
	Power Saving Mode	<0.5W
	Power Off Mode	0W(hard switch)
	Voltage	100–240V, 50 / 60 Hz
Mechanical Design	Chassis Colors	Black
	Tilt(angle)	Yes (+35° ~ -5°)
	Swivel(angle)	Yes (+180° ~ -180°)
	Pivot(angle/direction)	Yes (+90° ~ -90°)
	Height Adjustment	Yes (0~130mm)
VESA Wall Mounting	100x100mm	
Security	Kensington lock	Yes
Dimension	Phys. Dimension (WxHxD)	540 x (362~492) x 211 mm (with stand+webcam), 540 x 355 x 53 mm (without stand)
	Box Dimension (WxHxD)	631 x 450 x 222 mm
Weight	5.6 Kg(Net); 3.7 kg(Net weight without stand) 7.9 Kg (Gross)	
Accessories	Power cord(1.8m), VGA cable (1.8m, optional) , DP Cable(1.8m, optional), HDMI cable(1.8m, optional), Audio cable(1.8m, optional), USB cable(1.8m, upstream for webcam), Warranty card, Quick Start Guide, mini PC kit(MKT02, optional)	
Compliance Standards	Energy Star®, UL/cUL, CB, CE, ErP, EU Energy label, FCC, ICES-3, CCC, CEL, ISO9241-307, BSMI, CU, C-Tick, MEPS, VCCI, PSE, J-MOSS, KC, KCC, e-Standby, RoHS, Windows 7 & 10 WHQL, EPEAT Bronze(by country), TCO 8.0, TUV Flicker Free, TUV Low Blue Light, WEEE	


*1.Measuring a screen brightness of 200 nits without audio/ USB/ Card reader connection

*.All specifications are subject to change without notice.


Outline Dimension

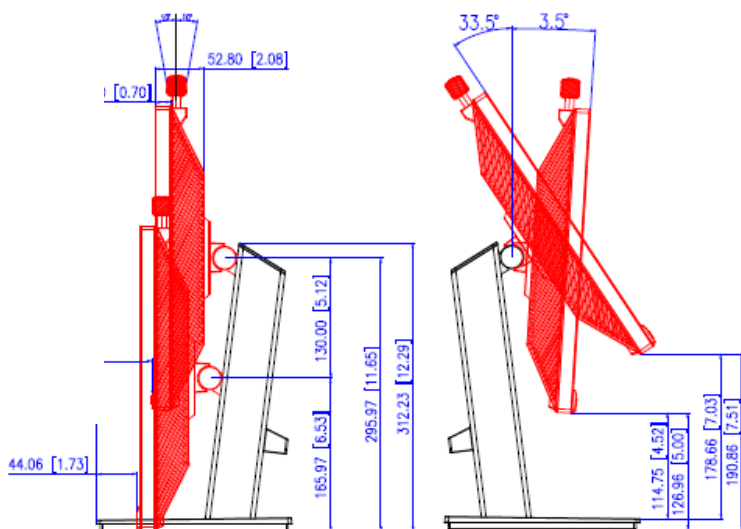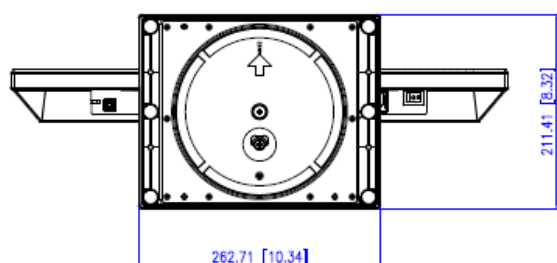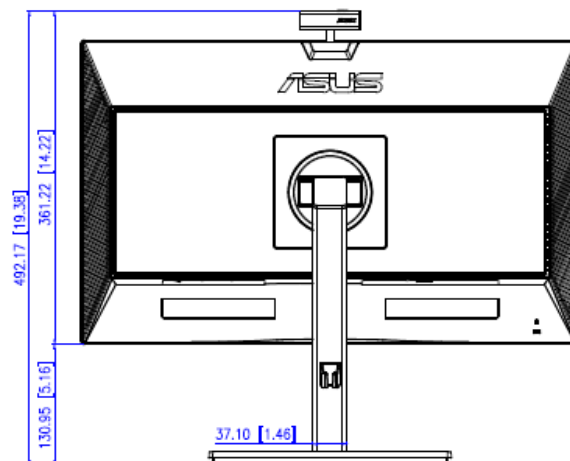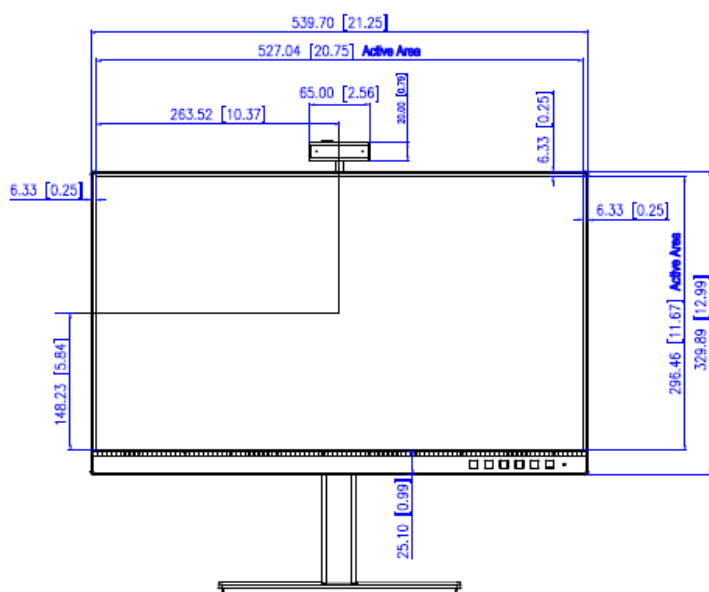

Webcam/Swivel:
Clockwise 180°
Counterclockwise 135°

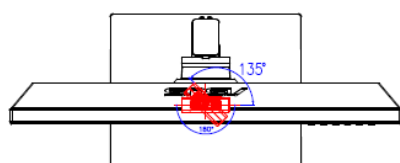

Swivel: +/-180°

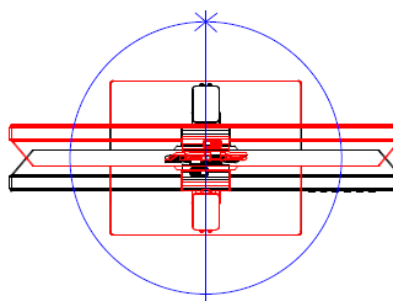

Webcam/Tilt: -10°~10°

*Unit: mm(inch)