ViewSonic <u>S</u> VIEWBOARD VIEWBOARD VIEWBOARD IFP8633-G


Key Features

Integrated with myViewBoard software
Multi-tasking capabilities for enhanced lesson delivery
Embrace simplicity and organization with the USB-C one-cable solution, offering 65W of Power Delivery.
Intuitive user interface and fast app launch for smooth operation

•Powered by Android 11 Product **Description**



The ViewBoard IFP33 Series harmonizes a touch display with versatile software to create a comprehensive classroom solution for interactive and engaging learning. This interactive flat panel delivers exceptional image quality in 4K UHD, thanks to cutting-edge bonding technology that provides clearer colors, enhanced contrast, and reduced glare. The 40-point touchscreen interface, equipped with Ultra Fine Touch Technology, empowers students and teachers to collaborate seamlessly, using either their fingers or dual-tip pens, for an intuitive pen-on-paper experience. Powerful built-in front-facing speakers and a USB-C port sort out for a complete and convenient multimedia experience. The ViewBoard IFP33 Series is preinstalled with myViewBoard to offer advanced lesson delivery options for teachers and powerful device management tools for administrators.

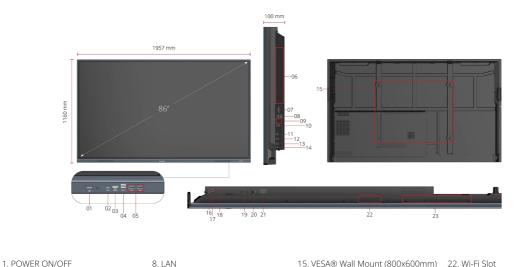

2. USB C 3. HDMI 1 4. TOUCH 1 5. USB 3.0x2 6. OPS Slot 7. RS-232 8. LAN 9. USB 2.0x2 10. TOUCH 2 11. HDMI 2 12. HDMI 3 13. HDMI OUT 14. USB 15. VESA® Wall Mount (800x600m 16. SPDIF 17. AUDIO in 18. AUDIO out 19. VGA 20. Power On/OFF 21. AC IN

23 Sensor Mount

Visit Us www.viewsonic.com

DISPLAY

BUNDLE SOFTWARE

DISPLAY		BUNDLE SOFTWARE	
Panel Size:	86"	Basic Annotation Software:	myViewBoard Whiteboard
Panel Type:	TFT LCD Module with DLED Backlight. IPS		myViewBoard for Windows (Embedded in
Display Area (mm):	1913.04(H) x 1083.96 (V)	Pro Annotation Software:	optional Ŵindows Slot- in PC)
Aspect Ratio:	16:9	Wireless Presentation:	myViewBoard Display
Resolution:	UHD 3840x2160(Pixels)	Wireless Presentation with Touch Feedback: Viewboard Cast:	Yes
Colors:	1.07B colors	SPECIAL FEATURES	
Brightness:	350 nits		(combine slot-in PC/Android/HDMI USB
Contrast Ratio:	5000:1 (max. with DCR enabled)	All-in-one USB port:	port) Front "SmartPort™ USB" to all channels.
Response Time:	8ms	Simple LAN sharing between IFP	10/100M for Android &
Viewing Angles:	H=178, V=178	and slot-in device:	Slot-in PC
Backlight Life:	50,000 Hours (8 hours of use per day)	Light Sensor: POWER	Yes
Surface Treatment:	Hardness: 7H Anti- glare coating	Voltage:	100-240V AC
Orientation:	Landscape	Consumption:	On:154W ; Off: ≤ 0.5W
PLATFORM	Landodapo	ERGONOMICS	
	Quad-core ARM Cortex	Wall Mount (VESA®):	800*600
Processor:	(A55*4)	OPERATING CONDITIONS	
RAM:	8GB DDR4	Temperature (° C):	0°C to 40°C
Storage:	128 GB		20% ~ 80% RH non-
тоисн		Humidity:	condensing
Type/ Tech:	Ultra Fine Touch Technology	DIMENSIONS (W X H X D)	1957 x 1160 x 100 mm
Touch Point:	40 points touch	Physical (inch / mm):	/ 77 x 45.7 x 3.9 in
INPUT		Packaging (inch / mm):	2110 x 1283 x 225 mm /83 x 50.5 x 8.9 in
HDMI:	HDMI-IN 2.0 x 3 (3840x2160 @60Hz)	WEIGHT	
RGB / VGA:	x1	Net (lb / kg):	129.1lb/58.55kg
Audio:	x1	Gross (lb / kg):	167.3lb/75.9kg
RS232:	x1	REGULATIONS	
OPS:	x1 (Optional Intel Standard OPS)	FCC/ICES003, EPEAT, CE EMC, LVD or CB, RoHS Green BOM & RoHS DoC, ErP, REACH SVHC List & DoC, EEL, WEEE, BSMI,BIS	
WiFi:	x1 (Optional VB-WIFI- 002/VB-WIFI-004/VSB-	PACKAGE CONTENTS 1. 3m power cord by ship area 2. Remote control with AAA battery 3. 3m touch USB cable 4. Touch pen x 2 (VB-PEN- 009) 5. Quick Start Guide + Compliance statement 6. RS232 adapter 7. Clamp x 5 8. Camera Plate 9. Screw x 8 (camera 2+2, wall mount 4) 10. HDMI cable 3m	
VVII 1.	050)		
OUTPUT			
HDMI:	HDMI 2.0 x1		
Audio:	x1	COMPATIBLE SLOT-IN PC	
SPDIF:	x1	VPC2-O series/VPC2-O-1B series/VPC12-WPO-15/16	
LAN			
RJ45:	x2		
USB		-	
Туре А:	USB3.0 x4 (Front x2, Rear x2); USB2.0 x1		
Туре В:	x2 (Front x1, Rear x 1)		
Туре С:	Front*1 (PD65W + DP1.2 + Data USB2.0 + 10M/100M sharing)		
SPEAKERS			
16W x 2			
TOP CAMERA PLATE			
Yes			

Yes

EMBEDDED OS

Android 11

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.