



EV2495-WT

Your advantages


The EV2495: a declaration of performance. Thanks to its USB-C ports and USB-C daisy chain functionality, the EV2495 ensures there are fewer cables and more freedom on the desk. Laptop and tablet users, in particular, benefit from the EV2495's docking functionality. The USB-C ports make it a piece of cake to go between the office and the home office. Users only need to connect a single cable to the computer to transmit audio, video, data, LAN signals and any other connected monitors as well as provide charging power. Its virtually frameless design, unparalleled image quality and uncompromising ergonomics also make it shine. The EV2495 has two USB upstream ports that can be used as a keyboard/mouse switch. Only a single computer and mouse need to be connected to the monitor in order to operate two computers and any other chained monitors. For example, when working from home, the signal source can be easily switched between a private PC and company computer. Connectivity that captivates.

- 24-inch monitor with a 16:10 aspect ratio, 1920 x 1200 pixels and IPS technology for outstanding image quality
- Docking functionality for tablets, laptops and smartphones thanks to USB 3.1 Type-C connectivity supplying a DisplayPort signal, LAN and power charging of 70 watts (max.)
- Bezel only 1 mm: amazingly compact and ultra-sleek design
- 1000:1 contrast ratio, brightness: 350 cd/m², 178° viewing angle
- Auto EcoView, EcoView Index and EcoView Optimizer for maximum power savings and superb ergonomics
- USB-C daisy chain functionality (USB-C output) for connecting multi-screen solutions
- Signal inputs: USB-C (Display Port Alt Mode), Display Port, HDMI
- Production that is proven to be environmentally friendly and socially responsible



Cutting-edge connectivity with USB-C

Video and audio reproduction, rapid data transfer, including network signal and power supply for connected devices – all this and so much more is possible with a single USB-C cable. The EV2495-WTwill become your central docking station to which you can quickly and easily connect your laptop. This is especially practical if you have multiple workstations or switch between working in an office and at home. The 70-watt power supply via USB-C reliably charges small computers or laptops, giving you more desk space since an additional power supply is no longer necessary for the computer.

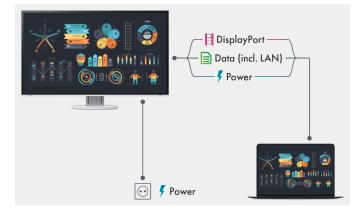

Efficient multi-display solution

The monitor's USB-C ports enable multiple monitors to be connected to the computer via a single cable (using the daisy chain method). This allows for a hassle-free configuration of up to four screens and reduces cable clutter. Being able to view and edit several applications simultaneously also improves comfort and increases efficiency when working.



Daisy chain method Tidied-up cables



Conventional solution Messy cabling

Information on daisy chain compatibility

Are you unsure whether the daisy chain method is compatible with your system? EIZO tests PCs that are currently available on the market to ensure that they are compatible with the daisy chain method and FlexScan monitors. 1. Find out more about compatibility tests for the EV2495 (link to the international EIZO website)

2. How to set up a daisy chain connection (link to the international EIZO website)


One monitor, many ports

The EV2495-WT is equipped with one USB-C port and three USB-A downstream ports for connecting various periphery devices without needing a USB hub. This is useful, for example, if your laptop only has a limited number USB ports or want to optimise the set-up of workstations for hot desking or in a home office environment. The monitor also has USB-C, HDMI and Display Port video inputs for total connection flexibility.



LAN port to ensure a stable network connection

The monitor has a dedicated LAN port to ensure a stable wired network connection. Laptops and PCs require only one USB-C cable to be connected to the EV2495-WT to gain network access via the monitor. This is particularly advantageous for laptops that do not have a LAN connection and allows for fast and stable data transfer, which is required for video conferences, for example.

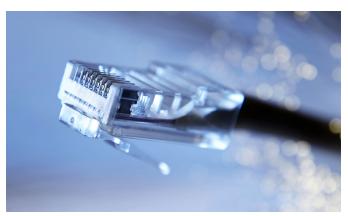




KVM switch: two PCs, one user

It has never been easier to use two PCs simultaneously. The EV2495-WT has an integrated KVM (Keyboard Video Mouse) switch for both its USB upstream ports and can be used as a keyboard/mouse switch. For example, a single monitor or even multiple chained monitors can be shared between a private and a company computer when working from home. This ensures that work is uninterrupted and makes for a tidy work area.

Maximum image quality thanks to the IPS panel

The monitor is capable of all three key elements of excellent image quality: excellent resolution of 1920 x 1200 pixels, maximum contrast of 1000:1, and stable brightness of up to 350 cd /m2. That means you will experience razor-sharp text contours, brilliant graphics, and clear images. Thanks to the high-quality IPS panels with LED backlight, contrasts and colours remain stable from every viewing angle.

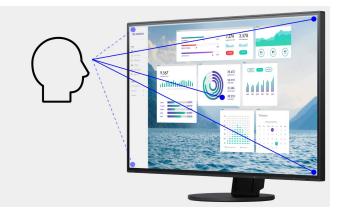

Precise colour control

An image can only be perfect if the colours are, too. This is why EIZO office monitors have a 10-bit look-up table at a minimum, which allows the colour information to be assigned much more precisely than with conventional 8-bit LUTs. The finest colour gradations ensure that gradients are always perfectly displayed, while also offering customised adjustment options. For example, you can adjust the white balance from 4000 K to 10000 K in 500-K intervals.



Look-Up-Table with 10 and more bit



Look-Up-Table with 8 bit

Overdrive to quickly change images

Fast, faster, overdrive. The overdrive function accelerates switching time so that the grey-grey change takes only 5 ms on average. You can watch films and rapidly changing images without annoying afterglow.



Without overdrive: streaking and time delay

Controls integrated into bezel


Electrostatic switches are integrated into the front of the EV2495-WT instead of mechanical buttons. This ensures ease of use while also giving the monitor an extremely elegant look. The speakers and all the controls are also built into the bezel, pointing forward in the direction of the user. They are fully integrated into the monitor's flat, nearly frameless design to offer an excellent user experience.





Elegant design

The monitor's appearance can be the key to creating a pleasant working atmosphere. Whether you are at home or in the office, the monitor's minimalistic, virtually frameless design and ergonomic functionality allows it to fit naturally into your workplace environment. The housing is available in both an elegant black and in white, with matching white cables.

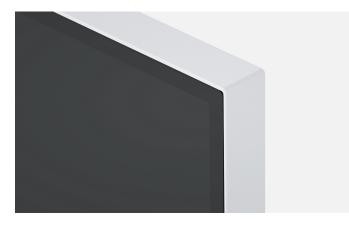

Save electricity and your eyes with Auto EcoView

At day, at night, bright, dark: No matter when and how you work, the Auto EcoView function continuously measures changes of the ambient light and optimises the monitor with ideal brightness values fully automatically by using a sensor. The benefits: Annoying glare is reduced, your eyes will not get tired as quickly. A special two-point control takes into account the brightest and darkest environment over the course of the day with the respectively desired screen brightness. Another advantage: Thanks to the automatic brightness adjustment, you will save up to 50% of your electricity costs in comparison to a monitor that is permanently operated at maximum brightness.

Of course, you can also continue to configure the monitor manually. EcoView Index is used for orientation on how environmentally friendly and economical your settings are.





During the day

In the evening

Flicker free: for the sake of the eyes

To help protect your eyes, EIZO has developed a hybrid technology to control the backlight. This combines the benefits of the otherwise standard PWM (pulse width modulation) and DC (direct current) control. The PWM control uses much higher frequencies than standard PWM methods. The result: a flicker-free viewing experience. Flickering is reduced down to absolute freedom from flickering, without impairing image quality or colour stability. In addition, the brightness can be set to less than 1% of the maximum value in darkly lit rooms. The benefit: Your screen remains free from glare even under these conditions.

Less blue light


The blue light emitted by some monitors' LED backlighting can be detrimental to workspace ergonomics. When editing documents, paper mode simulates reading on actual paper by using the appropriate settings for contrast, brightness and colour temperature. This reduces the amount of blue light. When used in combination with the Auto EcoView brightness settings, blue light is reduced by a total of up to 80%.






Anti-glare coating: more image, less reflection

The EV2495-WT offers a perfect, non-glare surface. By minimising glare by diffusing the reflected light, the EV2495-WT effectively protects your eyes from straining. This keeps your eyes from getting as tired and allows you to sit comfortably in front of the screen, without having to sit in a forced position to prevent glare.

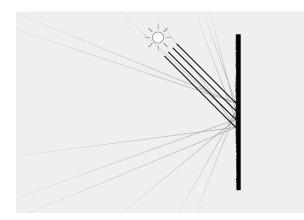


Preset colour modes: Optimised display at the press of a button

Preset colour modes make it easier for you to work and view images, texts and videos. Because when choosing colour settings, it makes a difference whether you are looking at a film, editing an image, surfing the Internet or writing texts. You can configure the respective default settings for brightness, gamma correction and colour temperature at the press of a button. For example, paper mode simulates the pleasant contrast of books by reducing the blue light portion and brightness. This reduces wear on your eyes when reading documents and prevents tiredness.

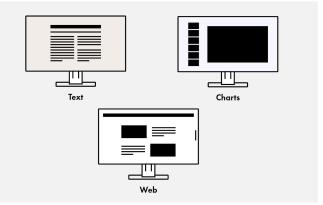

Flexible base

Ergonomic and stable: the adjustable stand focuses on ergonomics. You can rotate, swivel and tilt the monitor stand until you find the most comfortable setting for your back, neck and sitting posture. It features continuous height adjustment and can be lowered almost to the base plate of the stand, enabling you to position the top image line ergonomically right below your eye level.

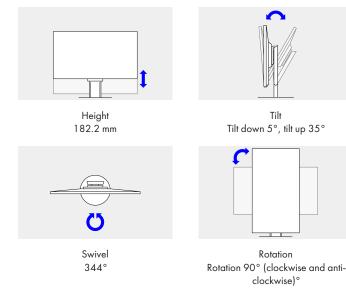

Screen InStyle

In addition to the on-screen menu, you can conveniently control the EV2495-WT by using the Screen InStyle software on a Windows PC. The configuration options include colour reproduction, energysaving options, and ergonomic functions that, for example, allow you to reduce the blue light portion (Circadian Dimming). The Screen InStyle software allows the user to apply the settings to all connected screens when using a multi-screen system.

More about Screen InStyle

Screen InStyle Server is a server application that allows system administrators to centrally manage and control monitors on which Screen InStyle is installed and which are connected to the network. This optimises power consumption and simplifies monitor asset management.

More about Screen InStyle Server




Operation made easy thanks to the Button Guide

The Button Guide provides all functions at a glance. Touching the button is enough and the screen will show all functions and the corresponding control panel.



Monitor Configurator for cross-network settings

Reduced workload for network administrators: The software allows you to configure multiple monitors uniformly in a single step – via a USB connection. This saves you time and ensures you have the same settings on all screens. The configuration can be saved as an XML file and transferred to clients.

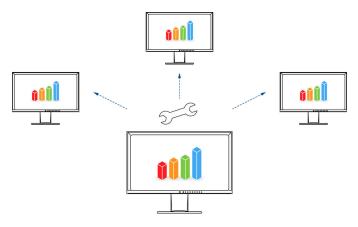

Save up to 30% of energy with the EcoView Optimizer

Save electricity without compromising quality: The EcoView Optimizer reduces the background lighting fully automatically for dark images. This reduces electricity consumption by up to 30%. At the same time, the signal is amplified and the colour tone values adjusted. The result: You will enjoy the image quality you are used to but consume less power.



Socially responsible production

The EV2495-WT is produced in a socially responsible way. It is free of child labour and forced labour. Suppliers along the supply chain have been carefully selected and they have also committed themselves to produce in a socially responsible way. This applies in particular to conflict minerals. We present a detailed report about our social responsibility annually and voluntarily.

Read the CSR report here





Zero-watt consumption thanks to the power switch

The monitors have an integrated mechanical power switch, which is extremely practical and energy-saving: If you switch off the monitor using the power switch, the device will stop consuming any power at all. Moreover, it consumes a maximum of 0.5 watt in standby mode.



Environmentally and climate friendly

Each EV2495-WT is manufactured in our own factory, which implements an environmental management system in accordance with ISO 14001. This includes measures to reduce waste, wastewater and emissions, resource and energy consumption, as well as to encourage environmentally conscious behaviour among employees. We publicly report on these measures on an annual basis as a main component of our CSR report.



Sustainable and durable

The EV2495-WT is designed for a long service life that takes into account the entire lifecycle and impact on the environment. It is generally well above the five-year guarantee. Spare parts are available up to five years after the end of production. The monitor's long service life and the ability to repair it save resources and the climate. When designing the EV2495-WT we paid attention to reducing resource consumption by using high-quality components and materials and being meticulous in production. The packaging of the EV2495-WT consists of cardboard box made of 85% recycled paper, while the transport padding is even 100% recycled plastic.



Five-year warranty

EIZO grants a five-year warranty. This is possible thanks to the highly developed production process based on a simple principle of success: sophisticated and innovative monitor technology, made from high-end materials.





Compliance with standards and guidelines

The monitor is certified according to important and all-encompassing sustainability standards such as TCO Certified Generation 8, EPEAT and Energy Star. The EV2495-WT is a safe investment, when taking into account issues such as ESG (Environmental, social and corporate governance) or SDG (Sustainable Development Goals) from the United Nations and following the necessary guidelines.

Examples of compliance at EIZO include:

- Safe use of chemicals in cable insulation
- Comprehensive information transparency after servicing for the entire product lifecycle
- Safe management of chemicals throughout the entire production process.
- Appropriate work time management for employees.
- Anti-corruption management system
- Responsible procurement of minerals
- Disclosure of information on energy management





Specification

1024, 1024, x768, 800 x 600, 720 x 400, 640 x 48059-61 Hz, HDMI: 31.76 kHz/ 49-51 Hz/49-61 HzPenel technologyIPS59-61 Hz, HDMI: 31.76 kHz/ 49-51 Hz/49-61 HzPenel technologyIPS78 °Number of colours or greyscele16.7 million colours (disploy port, 8 Bh), 16.7 million colours (HDMI, 8 Bi), 16.7 million colours (HDMI, 8 Bi), 16.7 million colour splette/look-up tableMore than 1.06 billion hues/14-bitMax. brightness (typical) [in ord)30Power consumption off [in watt]0.5Colour palette/look-up tableMore than 1.06 billion hues/14-bitPower Save Mode [in watt]0.5Max. brightness (typical) [in ord)30Power consumption off [in watt]0.5Max. trightness (typical) [in ord)300Power supplyAC 100-120 V / 200-240 V, 50/60 HzMax. trightness (typical) [in klograms]531 x 344 x 54Power supplyMax. trightness (typical) [in klograms]531 x 344 x 54Power supplyMax. refresh trate [in hertz]60Dimensions kweightsDimensions without stand [in kilograms]531 x 344 x 54Power consumption (Ims)531 x 344 x 54Power consumption [im kilograms]54 sFeatures & controlVeight without stand [in kilograms]4.9Swivel344 *90° (clockwise and anti-clockwise)Preset colour/ greyscele modes%RGB, Poper, DICOM, Movie, 2x free modes for user selection51 43 sandard 100 x 100 mmRedCS application dasesVillSoftware & acccessoriesSoftware & acccessoriesKoto Exolive ModexSSoftware & acccessories	Item no.	EV2495-WT	Signal inputs	USB-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort	
Display Display Display	Case colors	White			
NetherHukeenHukeenMainMainMainVariantsN294200/29442VariantsN294200/29420VariantsN294200/294200/29420V	Areas of application	Office, Gaming		USB-C	
AM 44954073545 1 high Control 1 high Contro 1 high Contro 1	Product line	FlexScan			
Warearia EP2445-84 (Color::Bold) Diploy	EAN	4995047056546			
Diploy In 16 and Section 2016 In 16 and Section 2016 In 16 and Section 2016 Stream size (in induct) 16 10 In 16 and Section 2016 In 16 and Section 2016 Watch sings at (induct) 16 10 In 16 and Section 2016 In 16 and Section 2016 Watch sings at (induct) 16 10 In 16 and Section 2016 In 16 and Section 2016 Watch sings at (induct) 170 1700 In 16 and Section 2016 In 16 and Section 2016 Watch sings at (induct) 170 1700 In 16 and Section 2016 In 16 and Section 2016 Watch sings at (induct) 170 1700 In 16 and Section 2016 In 16 and Section 2016 Watch sings at (induct) 170 1700 In 16 and Section 2016 In 16 and Section 2016 Watch sings at (induct) 170 1700 In 16 and Section 2016 In 16 and Section 2016 Watch sings at (induct) 170 1700 In 16 and Section 2016 In 16 and Section 2016 Watch sings at (induct) 170 1700 In 16 and Section 2016 In 16 and Section 2016 Watch sings at (induct) 170 1700 In 16 and Section 2016 In 16 and Section 2016 Watch sings at (induct) 170 1700 In 16 and Section 2016 In 16 and Section 2016 Watch sings at (induct) 170 1700 In 16 and Section 2016 Watch sings at (induct)	Variants	EV2495-BK (Colour: Black)		type B	
Storem is (in mode) 24.1 (1000000000000000000000000000000000000	Display		USB downstream ports	(1 x 10.5 W battery charging function)	
Frame 16:10 UNdex signed USE () DisplayIn those (Display) Visuads integrited interval 1720 + 120 3.5 am starse just 3.5 am starse just Name interval interval 1720 + 120 3.5 am starse just 3.5 am starse just Name interval 1720 + 120 1.5 am starse just 3.5 am starse just 3.5 am starse just Name interval 172 - 120 1.6 am starse just 1.6 am starse just 3.5 am starse just 1.0 am starse just Name interval 172 - 120 1.6 am starse just 1.6 am sta	· ·		LAN standards	(1000BASE-T), IEEE802.3u (100BASE-TX),	
Number of scales Sin 1.92 Number of scales 2070 + 0.270 Number of scales control			Males devid		
Land and consense of resolution 1920 ± 1200 Kard damby (pa) 94 Read damby (pa) 94 Read damby (pa) 195 Read damby (pa) 100			-		
Paid addition 0.270 x 0.270 Paid density (pp) 920 x 1000, 1800 x 1000 x 1000, 1800 x 1000 x 1000, 1800 x 1000 x 10000 x 10000 x 1000 x 100					
Final Action Steppinted 9.4 Breachion supported 1026, 1020, 1300, 1			Audio output	3.5 mm stereo jack	
Max. Inclusion supported 179 1792 1702			FL L.		
the 1024, 1024, 2024, 2026, 2026, 6007, 220, 400, 400, 400 Pis Pis Max: Verying angle horizontal 178 * Number of colours or preyende 10.7 million colours faiguay port, 83/b, 16.7 million 24 Max: Kerying angle horizontal 10.7 million colours faiguay port, 83/b, 16.7 million 10.5 Colour politely (losk, up table Mone dwort to billion how/14.bit 10.5 Max: adart cours contrast (hypical) 500 10.5 Max: devir age of the faith and the	Pixel density [ppi]	94	Electric data		
Mex. versing angle horizontal 178* Mox. orizonta graphical 178* Calour palette/tooks pitable Another 11.00 billion horizontal Mox. densk horizontal 178* Dimensions & weights 178* Dimensions & Mox densk 178* Dimensions & Mox densk 178* Direct columption 178* Dintensions (and seconte) 178*	Resolution supported		Frequency	USB-C: 31-76 kHz/59-61 Hz, DisplayPort: 31-76 kH 59-61 Hz, HDMI: 31-76 kHz/ 49-51 Hz/49-61 Hz	
Max. wireing ongle vertical 178 * Number of colours of grey scale 167 million colours (fapity part, B BA), 16.7 million Colour palent/took.up table More than 1.0 billion thes/14-bill Max. colour speet (typic) 4GB Max. colour speet (typic) More than 1.0 billion thes/14-bill Max. colour speet (typic) More than 1.0 billion thes/14-bill Max. colour speet (typic) More than 1.0 billion thes/14-bill Max. colour speet (typic) More than 1.0 billion thes/14-bill Max. colour speet (typic) More than 1.0 billion thes/14-bill Max. colour speet (typic) More than 1.0 billion thes/14-bill Max. colour speet (typic) More than 1.0 billion thes/14-bill Max. colour speet (typic) More than 1.0 billion thes/14-bill Max. colour speet (typic) More than 1.0 billion thes/14-bill Max. colour speet (typic) More than 1.0 billion thes/14-bill Max. colour speet (typic) More than 1.0 billion thes/14-bill Max. colour speet (typic) More than 1.0 billion thes/14-billion than 1.0 billion thes/14-billion than 1.0 billion thes/14-billion than 1.0 billion thes/14-billion than 1.0 billion than 1.0 billion thes/14-billion than 1.0 billion thes/14-billion than 1.0 billion	Panel technology	IPS	Power consumption (typical) [in watt]	24	
Max. winging angle vertical 178 * Number of colors or gryzelie 178 * Number of colors of gryzelie 25 million colors, fighty port, Bin, 16.7 million Color polity (r, lock-up tobb) 4608 Max. colors rapes (typical) 4608 Max. colors of gryzelie 4608 Max. colors of gryzelie 1000.1 Proof Son Mode (typical) 1000.1 Proof Son Mode (typical) 60 Boar officity (typical) 60 Son officity (typical) 51 × (135 - 538) × 230 Fedures & Control 53 × (135 - 538) × 230 Fedures & Control 53 × (135 - 538) × 230 Visity opported 60 Sono officity (typical) 53 × (135 - 538) × 230 Max. for home (typical) 53 × (135 - 538) × 230 Max. for home (typical) 53 × (135 - 538) × 230 Sono officity (typical) 53 × (135 - 538) × 230 Fedures & Control 53 × (135 - 138) × 243 × 54 Weight in hindra strong [twpi kinght] 53 × (135 - 138) × 243 × 54 Mox for home (typical) 40 Sono officity (typical) 53 × (135 - 138) × 243 × 54 Mox for home (typical) 40 Sono officity (typical) 53 × (135 - 138) × 243 × 54 Mox for home (typical) 40 Sono offic	Max. viewing angle horizontal	178 °		156 (at maximum brightness with all signal inputs and U	
Notified to close of gary Audit colour plot gary Audit Power second gary and the second gard gard gard gard gard gard gard gar	Max. viewing angle vertical	178 °		ports in use)	
Colour plate// Move short 100 billion huse/14-bit Power consumption off (in wm) 0 Colour plate// Move short 100 billion huse/14-bit Beargy-efficiency class Ar+ Max. Surghtmass (typical) 10001 The standard standa	Number of colours or greyscale	16.7 million colours (display port, 8 Bit), 16.7 million	Power Save Mode [in watt]	0.5	
Max. columpsion 4GB Max. brightness (typical) [in cd/m] 350 Max. chrightness (typical) [in cd/m] 5m Max. chrightness (typical) [in cd/m] 5m Max. chrightness (typical) [in cd/m] 60 Backright 60 Backright 60 Features & control 531 x (1356 - 538) x 230 USB-C docking 74 Star (table (ta			Power consumption off [in watt]	0	
Max. Jorghines (typical) 350 Max. Advis (typical) 1000-1. Max. Advis (typical) 1000-1. <td< td=""><td>Colour palette/look-up table</td><td>More than 1.06 billion hues/14-bit</td><td>Energy-efficiency class</td><td>A++</td></td<>	Colour palette/look-up table	More than 1.06 billion hues/14-bit	Energy-efficiency class	A++	
Max. brightness typical [in qu/m] 350 Max. data reason control 1000.1 Typical response time [gray/gray 5 ms Max. infestive tog [in http:// 60 Max. infestive tog [in http:// 50 Max. infestive tog [in http:// 50 Max. infestive tog [in http:// 51 x 326 x 539 x 230 Max. infestive tog [in http:// 53 1 x 326 x 539 x 230 Max. infestive tog [in http:// 51 x 326 x 539 x 230 Max. infestive tog [in http:// 53 1 x 326 x 539 x 230 Max. infestive tog [in http:// 53 x 326 x 54 Max. infestive tog [in http:// 53 x 326 x 54 Max. infestive tog [in http:// 53 x 326 x 54 Max. infestive tog [in http:// 57 / 35 * Prove 40° (in (chockies on damt-ockies) DICOM infer 40 Max. infestive tog hundred 40° Accessories 50° Chockies on damt-ockies Reckies application dawses 50° Chockies on damt-ockies Software & accessories 50° Chockies on damt-ockies Software & accessories 50° Chockies on damt-ockies Software & accessories 50° Chockies on damt-ocki	Max. colour space (typical)	sRGB	Power supply	AC 100-120 V / 200-240 V, 50/60 Hz	
Max. data controtist (proc) 1000.1 Simulation Simulation Max. refersh rote (in herit) 60 Max. refersh rote (in herit) 60 Bolt Bolt Features & control UB UBS-C doking Single report Single report Dimensions whoot stand (in herit) 60 Dimensions whoot stand (in herit) 60 Bolt Single report UBS-C doking Variat robur/groyscole modes Single report Solic Control Bolt Single report Bolt Single report Bolt Single report Control Solic Control Bolt Single report Bolt Single repo	Max. brightness (typical) [in cd/m²]	350			
alternation] 60 Backlight ED Fedtures & control 51 x (356 - 538) x 230 USB-C docking - USB-C docking - Prest clour/greyscle mode: 31 x 34 x 54 Weight fink lingerom: 4.9 Strict - DICOM tone curve - VERS clour/greyscle mode: - DICOM tone curve - Versit clour/greyscle mode: - DICOM tone curve - DICOM tone curve - Versit clour/greyscle mode: - DICOM tone curve - Versit clour/greyscle mode: - DICOM tone curve - DICOM tone curve - Versit clour/greyscle mode: - Coverdrive - Coverdrive - Coverdrive - Coverdrive - Coverdrive - Software & accessries Software & accessries Coverdrive - Software & accessries Software & accessries Coverdrive - Software & accessries Software & accessries Software & accessries Software & accessries Software & accessries <	Max. dark room contrast (typical)	1000:1	-		
Wate: Arefan freig in herrig 00 Backlight LED Backlight LED Fed trues & control 331 x 344 x 54 USS-C docking		5 ms	Dimensions & weights		
backdign biologin bi	Max. refresh rate [in hertz]	60	Dimensions [mm]	531 x (356 - 538) x 230	
Parameters Dimensions without stand [mm] 531 x 344 x 54 Parameters Single Appen Dimensions without stand [mm] 531 x 344 x 54 Name Single Appen Dimensions without stand [mm] 531 x 344 x 54 Dimensions without stand [mm] 531 x 344 x 54 Single Appen Dimensions without stand [mm] 531 x 344 x 54 Dimensions without stand [mm] 531 x 344 x 54 Dimensions without stand [mm] 531 x 344 x 54 Dimensions without stand [mn] 531 x 344 x 54 Dimensions without stand [mn] 531 x 344 x 54 Dimensions without stand [mn] 531 x 344 x 54 Dimensions without stand [mn] 531 x 344 x 54 Dimensions without stand [mn] 531 x 344 x 54 Dimensions without stand [mn] 531 x 344 x 54 Dimensions without stand [mn] 531 x 344 x 54 Dimensions without stand [mn] 531 x 344 x 54 Dimensions without stand [mn] 531 x 344 x 54 Dimensions without stand [mn] 531 x 344 x 54 Dimensions without stand [mn] 531 x 344 x 54 Dimensions without stand [mn] 531 x 344 x 54 Dimensions without stand [mn] 531 x 344 x 54 Dimensions without stand [mn] 531 x 344 x 54 Dimensions without stand [mn] 531 x 344 x 54 Dimensions without stand [mn] </td <td></td> <td>LED</td> <td>Weight [in kilograms]</td> <td>7.6</td>		LED	Weight [in kilograms]	7.6	
Swivel 344 ° LAN supported			Dimensions without stand [mm]	531 x 344 x 54	
USB-C docking ✓ LAN supported ✓ LSB-C docking ✓ Prester Colour/ greyscale modes SRGB, Paper, DICOM, Movie, 2x free modes for user salection DICOM tone curve ✓ RadicS opplication dosses VIII Auto EcoView ✓ Overdrive ✓ Overdrive ✓ No flickning thanks to hybrid controls ✓ No flickning thanks to hybrid controls ✓ No flickning thanks to hybrid controls ✓ Software ✓ Software ✓ No flickning thanks to hybrid controls ✓ Software ✓ Software </td <td>Features & control</td> <td></td> <td>Weight without stand [in kilograms]</td> <td>4.9</td>	Features & control		Weight without stand [in kilograms]	4.9	
LAN supported Indiae Torvard/ backward 5 ° / 3 5 ° Press toolar// greyscale modes isBelicino 90° (backward and anti-dackware) RadiCS application classes VIII Auto EcoView Image and the specified and the		1	Swivel	344 °	
Preset colour/ grayscale modes sRGB, Paper, DICOM, Movie, 2x free modes for user selection DICOM tone curve RadiCS application classes VIII Auto EcoView Idex EcoView Idex Software end other acc Software of the control	-		Incline forward/backward	5°/35°	
belchion selection Height adjustment ronge [mm] 182.2 DICO Mone curve Image: Contraining adjustment ronge [mm] 182.2 Height adjustment ronge [mm] P			Pivot	✓ 90° (clockwise and anti-clockwise)	
Dictor more durve Image: Control of Contro		selection			
Auto EcvTew Image: Software & accessories EcvView Index Image: Software & accessories Screen InStyle EcvView Optimizer Image: Software & accessories Screen InStyle Overdrive Image: Software & accessories Screen InStyle No flickering thanks to hybrid controls Image: Software & accessories Screen InStyle No flickering thanks to hybrid controls Image: Software & accessories Screen InStyle Bittin specters Image: Software & accessories Recessories Software & accessories Et2O Screen Cleaner (for the best possible clean with cleaner specters) Software & accessories Et2O Screen Cleaner (for the best possible clean with cleaner specters) Software & accessories Et2O Screen Cleaner (for the best possible clean with cleaner specters) Software & accessories Et2O Screen Cleaner (for the best possible clean with cleaner specters) Software & accessories Et2O Screen Cleaner (for the best possible clean with cleaner specters) Software & accessories Et2O Screen Cleaner (for the best possible clean with cleaner specters) Software & accessories Et2O Screen Cleaner (for the best possible clean with cleaner specters) Software & accessories Et2O Screen Cleaner (for the best possible clean with cleaner specters)	DICOM tone curve	\checkmark	Hole spacing		
EcoView Index EcoView Optimizer Overdrive No filckering thanks to hybrid controls HDCP Decoder Input signal identification Suiti-in speakers ODerdrive Adjustment options Suiti-in speakers Oblickering input, OSD language, Interpolation, Audio source, signal input, OSD language, Interpolation, SU (ISE, CO, SP, FCC-B, CAN ICES-3 (IB), RCM, VCCH, SCC, Re, FEPAT 2018 (US), cTÜV/SI, KW, VCCH, SCC, Re, CAN ICES-3 (IB), RCM, VCCH, SCC,	RadiCS application classes	VIII			
EcoView Optimizer Accompanying software and other ac streen instyle Streen instyle Certification Cerice Contem, TUV/Files Peace, PEAE T2018 (US), cTUV/Ses, CPAI (PESE A) (PEAE PEAE PEAE PEAE PEAE PEAE PEAE PEA	Auto EcoView	\checkmark	Software & accessories		
EcoView Optimizer Image: Control of the set of the se	EcoView Index	\checkmark	Accompanying software and other ac-	Screen InStyle	
No flickering thanks to hybrid controls guide, Cable protection HDCP Decoder guide, Cable protection Input signal identification Calculation MDCP Decoder Calculation KVM switch Calculation Built-in speakers Calculation OSD language de, en, fr, es, it, se Adjustment options Brightness, Contrast, Gamma, All EcoView functions, Colour saturation, Colour temperature, Resolution, Colour Mode, Colour tono, Coverdrive, Volume, Audio surce, Signal input, OSD language, Interpolation, Audio input (INVERC) SubjeyPort/HDMI(I) Button Guide Certification & standards Certification & standards CE, CB, TCO certified 8.0, EPA Energy Stor, TÜV/GS, TÜV/Ergonomics (Including ISO 9241-307), TÜV/Blue Low Light Content, TUV/Filcker Free, EPAT 2018 (US), erCM, VCCI-B, CCC, RoHS, China RoHS, WEEE Warranty Warranty	EcoView Optimizer	\checkmark			
Notesting industry Centification MCCP Decoder Input signal identification Input signal identification Cessories Built-in speakers Colour starting SD language de, en, fr, es, it, se Adjustment options Brighness, Contrast, Gamma, All EcoView functions, colour starting, Colour, PP200-K (Starten Starting, Colours, PP200-K)	Overdrive	\checkmark	Additional supply	Power cord, Signal cable USB-C – USB-C (5 A), Quicl	
Induct Standards Image: Standards Scatching the monitor), HH200PE. (HDMI (High Definition Multimedia Interface) cable, PM200-K Built-in speakers Image: Standards Image: Standards OSD language de, en, fr, es, it, se Scatching the monitor), HH200PE. (HDMI (High Definition Multimedia Interface) cable, PM200-K Adjustment options Brightness, Contrast, Gamma, All EcoView functions, Colour temperature, Resolution, Colour Mode, Colour soluration, Colour temperature, Resolution, Colour temperature, Resolution, Colour temperature, Resolution, Colour Mode, Colour soluration, Colour temperature, Resolution, Colour temperature, Resolution, Colour Mode, Colour tone, Overdrive, Volume, Audio source, Signal input, OSD language, Interpolation, Audio input (USB-C, DisplayPort/HDMI) Scatching the anoticity, PP200-K (DisplayPort cable, 200 cm) Button Guide Integrated power unit Image: Standards Scatching the submitted in the date of purchase.**) Zero pixel error guarante completely lit sub-pixels (partial pixels ISO 9241-307). Valid: six months from the purchase date. Certification CE, CB, TCO certified 8.0, EPA Energy Star, TÜV/GS, TÜV/sEgonomics (including ISO 9241-307), TÜV/Blue Low Light Content, TÜV/Fitcker Free, EPEAT 2018 (USB), RCM, VCCLB, CCC, RoHS, China RoHS, WEEE *) Maximum of 30,000 hours of operation from the date of purchase date. Warranty Warranty Scatching Resolution, Submit R	No flickering thanks to hybrid controls	\checkmark		guide, Cable protection	
Input signal identification Imput signal identification Definition Multimedia Interface) cable), PM200-K KVM switch Imput signal identification Imput signal identification Built-in speakers Imput signal identification Imput signal identification OSD language de, en, fr, es, il, se Imput signal identification, Colour tamperature, Resolution, Colour memory valuration, colour temperature, Resolution, Colour Manager, Interpolation, Audio input (USB-C, DisplayPort concell) Imput signal identification Imput signal identification, PP200-K (DisplayPort cable, 200 cm) Button Guide Imput signal identification Imput signal identification, Standards Imput signal identification Imput signal identification Certification CE, CB, TCO certified 8.0, EPA Energy Star, TÜV/GS, TÜV/Ergonomics (Including ISO 9241-307), TÜV/Blue low light Content, TÜV/Filter Free, FEPAT 2018 (US), cTÜVus, TÜV/S, EAC, PSE, FCC-B, CAN ICES-3 (B), RCM, VCCI-B, CCC, RoHS, China RoHS, WEEE Imput sub-pixels (partial pixels ISO 9241-307). Valid: six months from the purchase date.	HDCP Decoder	\checkmark	Accessories	EIZO ScreenCleaner (for the best possible clean without	
KVM switch ✓ Built-in speakers ✓ OSD language de, en, fr, es, it, se Adjustment options Brighness, Contrast, Gamma, All EcoView functions, Calour soturation, Colour temperature, Resolution, Colour Mode, Colour tone, Overdrive, Volume, Audio source, Signal input, OSD language, Interpolation, Audio input (USB-C, DisplayPort/HDMI) Button Guide ✓ Integrated power unit ✓ Certification & standards CE, CB, TCO certified 8.0, EPA Energy Star, TÜV/GS, TÜV/Ergonomics (including ISO 9241-307), TÜV/Bub, or UJV, s, TÜV/S, EAC, PSE, FCC-B, CAN ICES-3 (B), RCM, VCCI-B, CCC, RoHS, China RoHS, WEEE *) Maximum of 30,000 hours of operation from the date of purchase.**) Zero pixel error guarante completely lit sub-pixels (partial pixels ISO 9241-307). Valid: six months from the purchase date.	Input signal identification			Definition Multimedia Interface) cable), PM200-K (DisplayPort cable to transfer digital video and audio	
Built-in speakers Image and the speakers Image					
OSD language de, en, fr, es, it, se Intervalue Sk standa (Sk standa), CC-100-W1 (short OSB-c. point (abbr OSB-c. point (abb			signals.), PCSK-03R-WT (Thin Client Mount for the El FlexStand 3R stand), CC100-WT (Short USB-C port		
Adjustment options Brightness, Contrast, Gamma, All EcoView functions, Colour saturation, Colour temperature, Resolution, Colour Mode, Colour tone, Overdrive, Volume, Audio source, Signal input, OSD language, Interpolation, Audio input (USB-C, DisplayPort/HDMI) Cartification Integrated power unit Integrated power unit *) Maximum of 30,000 hours of operation from the date of purchase.**) Zero pixel error guarante completely lit sub-pixels (partial pixels ISO 9241-307). Valid: six months from the purchase date. Certification CE, CB, TCO certified 8.0, EPA Energy Star, TÜV/GS, TÜV/Ergonomics (including ISO 9241-307), TÜV/Blue Low Light Content, TÜV/Flicker Free, EPEAT 2018 (US), cTÜVus, TÜV/S, EAC, PSE, FCC-B, CAN ICES-3 (B), RCM, VCCI-B, CCC, RoHS, China RoHS, WEEE Warranty					
Adjustifient options Diguness, Colour saturation, Colour memperature, Resolution, Colour Mode, Colour saturation, Colour memperature, Resolution, Audio source, Signal input, OSD language, Interpolation, Audio input (USBC, DisplayPort/HDMI) Button Guide Image: Colour saturation, Colour temperature, Resolution, Audio input (USBC, DisplayPort/HDMI) Certification & standards Certification & standards Certification CE, CB, TCO certified 8.0, EPA Energy Star, TÜV/GS, TÜV/Ergonomics (including ISO 9241-307), TÜV/Blue Low Light Content, TÜV/Flicker Free, EPAT 2018 (US), cTÜVus, TÜV/S, EAC, PSE, FCC-B, CAN ICES-3 (B), RCM, VCCI-B, CCC, RoHS, China RoHS, WEEE Warranty	• •				
Button Guide ✓ Integrated power unit ✓ Certification & standards ✓ Certification & standards Certification & standards Certification CE, CB, TCO certified 8.0, EPA Energy Star, TÜV/GS, TÜV/Ergonomics (including ISO 9241-307), TÜV/Blue Low Light Content, TÜV/Flicker Free, EPEAT 2018 (US), cTÜVus, TÜV/S, EAC, PSE, FCC-B, CAN ICES-3 (B), RCM, VCCI-B, CCC, RoHS, China RoHS, WEEE Warranty	Adjosimeni opnons	Colour saturation, Colour temperature, Resolution, Colour Mode, Colour tone, Overdrive, Volume, Audio source, Signal input, OSD language, Interpolation, Audio input	Terms		
Integrated power unit Image: Certification & standards Certification & standards Certification Certification CE, CB, TCO certified 8.0, EPA Energy Star, TÜV/GS, TÜV/Ergonomics (including ISO 9241-307), TÜV/Blue Low Light Content, TÜV/Flicker Free, EPEAT 2018 (US), cTÜVus, TÜV/S, EAC, PSE, FCC-B, CAN ICES-3 (B), RCM, VCCI-B, CCC, RoHS, China RoHS, WEEE Warranty	Button Guide				
Certification CE, CB, TCO certified 8.0, EPA Energy Star, TÜV/GS, TÜV/Ergonomics (including ISO 9241-307), TÜV/Blue Low Light Content, TÜV/Flicker Free, EPEAT 2018 (US), cTÜVus, TÜV/S, EAC, PSE, FCC-B, CAN ICES-3 (B), RCM, VCCI-B, CCC, RoHS, China RoHS, WEEE Warranty			completely lit sub-pixels (partial pixels ISO 9	9241-307). Valid: six months from the purchase date.	
TÜV/Ergonomics (including ISO 9241-307), TÜV/Blue Low Light Content, TÜV/Flicker Free, EPEAT 2018 (US), cTÜVus, TÜV/S, EAC, PSE, FCC-B, CAN ICES-3 (B), RCM, VCCI-B, CCC, RoHS, China RoHS, WEEE	Certification & standards				
TÜV/Ergonomics (including ISO 924 ¹ : 307), TÜV/Blue Low Light Content, TÜV/Flicker Free, EPEAT 2018 (US), cTÜVus, TÜV/S, EAC, PSE, FCC-B, CAN ICES-3 (B), RCM, VCCI-B, CCC, RoHS, China RoHS, WEEE	Certification	CE, CB, TCO certified 8.0, EPA Energy Star, TÜV/GS.			
		TÜV/Ergonomics (including ISO 9241-307), TÜV/Blue Low Light Content, TÜV/Flicker Free, EPEAT 2018 (US), cTÜVus, TÜV/S, EAC, PSE, FCC-B, CAN ICES-3 (B),			
Warranty and service 5 years warranty*	Warranty				
	Warranty and service	5 years warranty*			

Phone: 01344 317 480 | Fax: 01344 308122 www.eizo.co.uk