



## 23.8" Open Frame Display Commercial Grade DT24VW2-O

### The features:

- 23.8", 1920 x 1080 resolutions
- 250nits, PCAP multi-touch panel
- IP65 dust- and waterproof grade in front panel
- Anti-fingerprint coating glass panel
- Tempered safety glass
- IK08 Impact Protection\*
- Quality panel for landscape, portrait mode
- VESA mounting holes 100 x 100mm and 100 x 200mm

\*IK08 rated products are protected against 5 joules of impact. This is the equivalent of a 1.7kg mass being dropped from 300mm above the protect.


Self-Service Kiosk



Industrial Monitor



Smart Locker

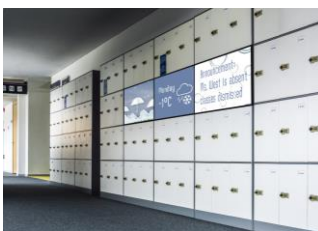


EMC and DoC




## Dimensions

Unit: mm


Front View

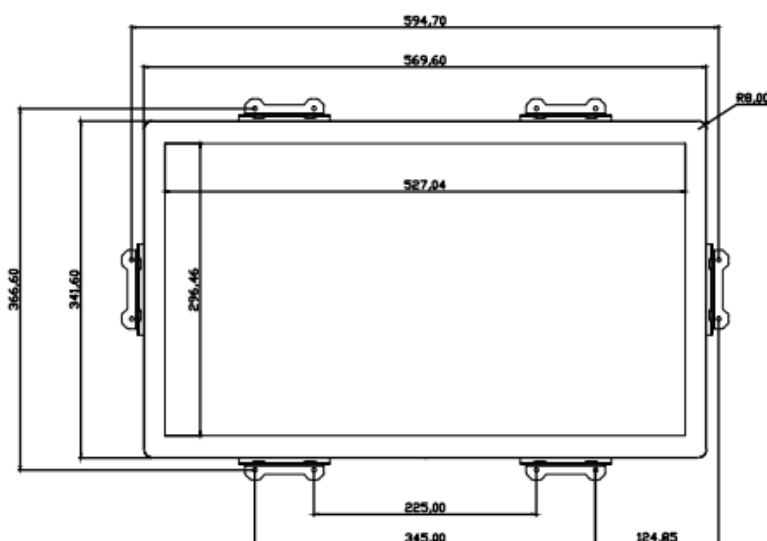

Rear View

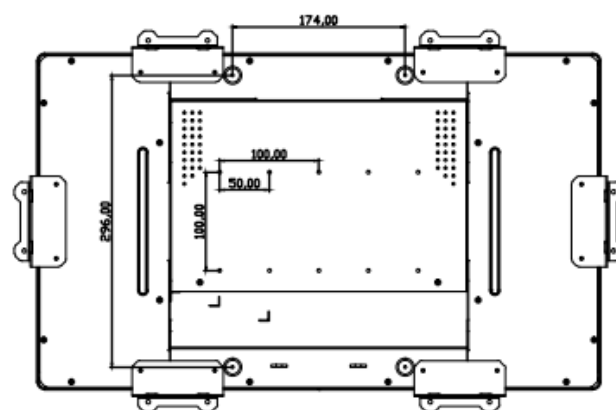

Bottom View



## Specifications

DT24VW2-O			IP Level		IP65 (front)
Chassis	Mechanical Design	Metal with implanted IP design	I/O Interface On Rear Site		HDMI type A, USB for touch (5V input from USB host), VGA DB-15 female, RJ45 for OSD remoter, DC-in for adapter
	Dimension (W x H x D)	569.6 x 341.6 x 49.9 mm	Net Weight		7.24 Kg
Thermal Solution		Fanless technology	Mounting	Rear	100x100mm and 100x200mm VESA mount
Panel	Resolution	23.8", 16:9, 1920 x 1080, 60Hz		Side	Mounting brackets on all four sides
	Type	VA	Input Voltage		DC input 12V/3A
	Maximum Brightness	250cd/m2	Warranty		3 years
	Response Time	16ms	Environment		
	Contrast Ratio	3000:1	MTBF		50,000hrs demonstrated
	View Angle (Horizontal)	89/89	Relative Humidity		90% RH (40°C non-condensing)
	View Angle (Vertical)	89/89	Certification		FCC / CE(Class B) / RoHS
Touch	Backlight	LED backlight	Packing		
	Touch Glass	Projected capacitive touch, 23.8 inch, 3.0mm chemically strengthened glass, 7H	Dimension (Packing)		650 x 440 x 160 mm
Temper ature	Touch Controller	10 points touch	Gross Weight		11 Kg
	Operation	0°C ~ 50°C (32°F~ 122°F)	Accessory In Box		HDMI cable, USB cable, OSD remote, AC cable, Adapter, Side mount bracket x8, M4 screws x16
OS of Driver Software Support	Storage	-20°C ~ 60°C (-4°F~ 140°F)			
		Windows, Linux and Android			

\*Please note that product specifications are subject to change without notice



AOPEN Headquarter  
New Taipei City,  
Taiwan

AOPEN America  
San Jose,  
USA

AOPEN Europe  
Rosmalen,  
Netherland

AOPEN Australia  
Melbourne,  
Australia

AOPEN Japan  
Tokyo,  
Japan

AOPEN China  
Shanghai,  
China