



## An Intel® i5 OPS slot PC with Windows® 11 which supports 5K (5120x2160) resolution

This mini OPS PC with Intel® Core™ i5 inside turns your iiyama (interactive) large format display into a stand-alone solution. It comes equipped with a powerful Intel® processor with integrated Ultra HD graphics and a fast SSD drive. No hassle with cables and having to mount a PC at the back of the monitor or on a floor lift. The OPC51201CC-1 is also very quiet with a noise level below 34dB at 100% CPU load at 1meter distance. Simply slide in the iiyama OPS slot PC and get started right away.

## 01 DEVICE


| Туре                | OPS slot PC  |
|---------------------|--|
| CPU                 | Intel® Core™ i5-1240P, TPM 2.0 (Trusted Platform Module), vPro Essential |
| RAM                 | 16GB DDR4  |
| SSD                 | 256GB M.2  |
| Graphics            | Integrated Intel® Iris® Xe   |
| Chipset             | Intel®   |
| Sound card          | Integrated High Definition Audio Stereo                                  |
| Networking          | 10/100/1000M Adapter   |
| WiFi                | 802.11 a/b/g/n/ac/ax (M.2 NVME)  |
| Bluetooth           | 5.3  |
| Operating system    | Windows 11 IoT Enterprise  |
| LAN (RJ45)          | x1   |
| USB                 | 3.0 x2, 2.0 x2, 3.2 (Type C) x2 (support DP Alt mode)                    |
| HDMI Out            | x1 (2.0)   |
| Headphone connector | yes  |
| Microphone In       | x1 (mic and headset combo)   |



Power usage 95W typical, 0.5W stand by



| Weight (without box) | 0.75kg        |
|----------------------|---------------|
| Weight (with box)    | 0.95kg        |
| EAN code             | 4948570033188 |

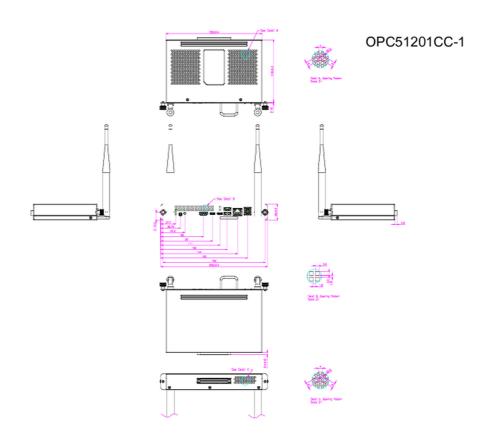

## 04 ENVIRONMENTAL CONDITIONS

| Operation temperature range | 0°C - 40°C    |
|-----------------------------|---------------|
| Operation humidity          | 10% - 95%     |
| Storage temperature range   | - 10°C - 50°C |
| Storage humidity            | 10% - 95%     |

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED