


Wiring Diagram

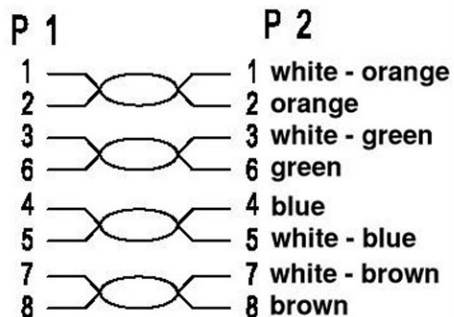

Item No.	Color
K8456.x	grey
K8091.x	magenta (pink)
K8092.x	white
K8093.x	green
K8094.x	blue
K8095.x	yellow
K8096.x	red
K8098.x	black
K8099.x	orange

Length (L)
0,5m +/- 5mm
1m +/- 10mm
1,5m +/- 15mm
2m +/- 20mm
3m +/- 30mm
5m +/- 50mm
7,5m +/- 75mm
10m +/- 100mm
15m +/- 150mm
20m +/- 200mm
25m +/- 250mm
30m +/- 300mm

c	Cable	UTP Cat.5e Patch cord, AWG24/7 x 4P, PVC sheath flame retardant acc. to IEC 60332-1, OD = 5,4mm Printing: UTP CAT.5E 100MHZ 24AWGX4P PATCH ISO/IEC 11801 & EN 50173 VERIFIED	L / mm
b	Overmold	PVC 75A / Length imprint on boot	8 g
a	Connector	RJ45 8P8C'S UNSHIELDED, GOLD PLATED 3-50u" Housing Polycarbonate, UL94V-0 / UL94V-2	2 Pcs
No.	Mat.Name	Description	Quantity

Item No.	K8456.x / K8091-92-93-94-95-96-98-99.x			
Description				
UTP Cat.5e Patch cord, AWG24/7 x 4 Pairs, PVC				
Drawing	Check	Approved	Date	
			2007-08-01	

ROHS compliant