



## 10.1" Open Frame Display Commercial Grade DT10VW3-O



### The features:

- 10.1", 1280 x 800 resolutions
- 300nits, PCAP multi-touch panel
- IP65 dust- and waterproof grade in front panel
- Anti-fingerprint coating glass panel
- Tempered safety glass
- IK07 Impact Protection\*
- Quality panel for landscape, portrait mode
- VESA mounting holes 75 x 75 mm

\*IK07 rated products are protected against 2 joules of impact. This is the equivalent of a 0.5kg mass being dropped from 400mm above the protect.


Self-Service Kiosk



Industrial Monitor



Smart Locker

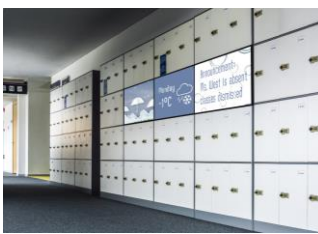


EMC and DoC



# DT10VW3-O

## Dimensions

Unit: mm

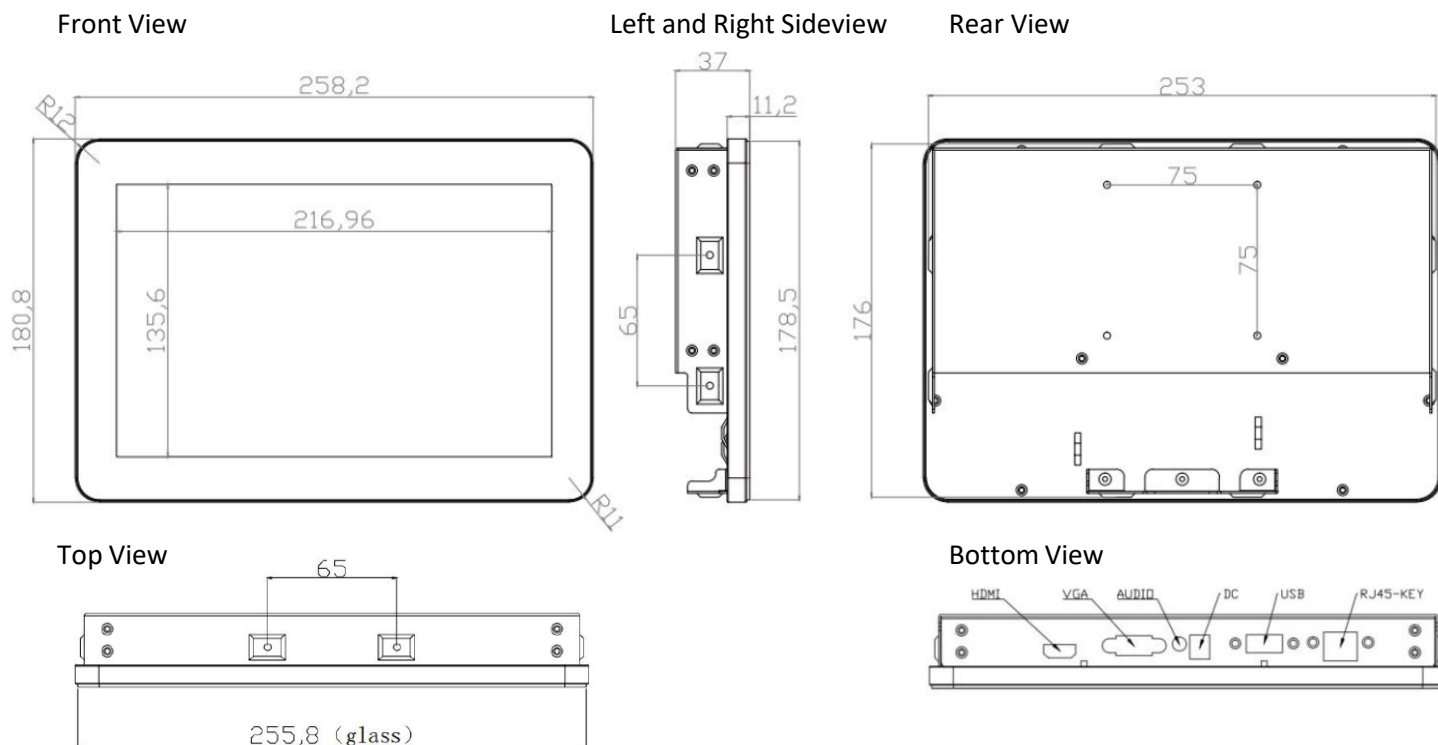

## Specifications

DT10VW3-O		
Chassis	Mechanical Design	Metal with implanted IP design
	Dimension (W x H x D)	258.2 x 180.8 x 37mm
Thermal Solution		Fanless technology
Panel	Resolution	10.1", 16:10, 1280 x800, 60Hz
	Type	VA
	Maximum Brightness	300cd/m2
	Response Time	25ms
	Contrast Ratio	800:1
	View Angle (Horizontal)	85/85
	View Angle (Vertical)	85/85
	Backlight	LED backlight
Touch	Touch Glass	Projected capacitive touch, 10.1 inch, 2.0mm chemically strengthened glass, 7H
	Touch Controller	10 points touch
Temper ature	Operation	0°C ~ 50°C (32°F~ 122°F)
	Storage	-20°C ~ 60°C (-4°F~ 140°F)
OS of Driver Software Support		Windows, Linux and Android

IP Level		IP65 (front)
I/O Interface On Rear Site		HDMI type A, USB for touch (5V input from USB host), VGA DB-15 female, RJ45 for OSD remoter, DC-in for adapter
Net Weight		1.50 Kg
Mounting	Rear	75 x 75mm VESA mount
	Side	Mounting brackets on all four sides
Input Voltage		DC input 12V/3A
Warranty		3 years
Environment		
MTBF		30,000hrs demonstrated
Relative Humidity		90% RH (40°C non-condensing)
Certification		FCC / CE(Class B) / ROHs
Packing		
Dimension (Packing)		350 x 200 x 140 mm
Gross Weight		1.85 Kg
Accessory In Box		HDMI cable, USB cable, OSD remote, AC cable, Adapter, Side mount bracket x8, M4 screws x16, M3 screws x16
*Please note that product specifications are subject to change without notice		

\*Please note that product specifications are subject to change without notice



AOPEN Headquarter  
New Taipei City,  
Taiwan

AOPEN America  
San Jose,  
USA

AOPEN Europe  
Rosmalen,  
Netherland

AOPEN Australia  
Melbourne,  
Australia

AOPEN Japan  
Tokyo,  
Japan

AOPEN China  
Shanghai,  
China

v1.2