


All system components at a glance –
easy networkability for 360° Smart Access



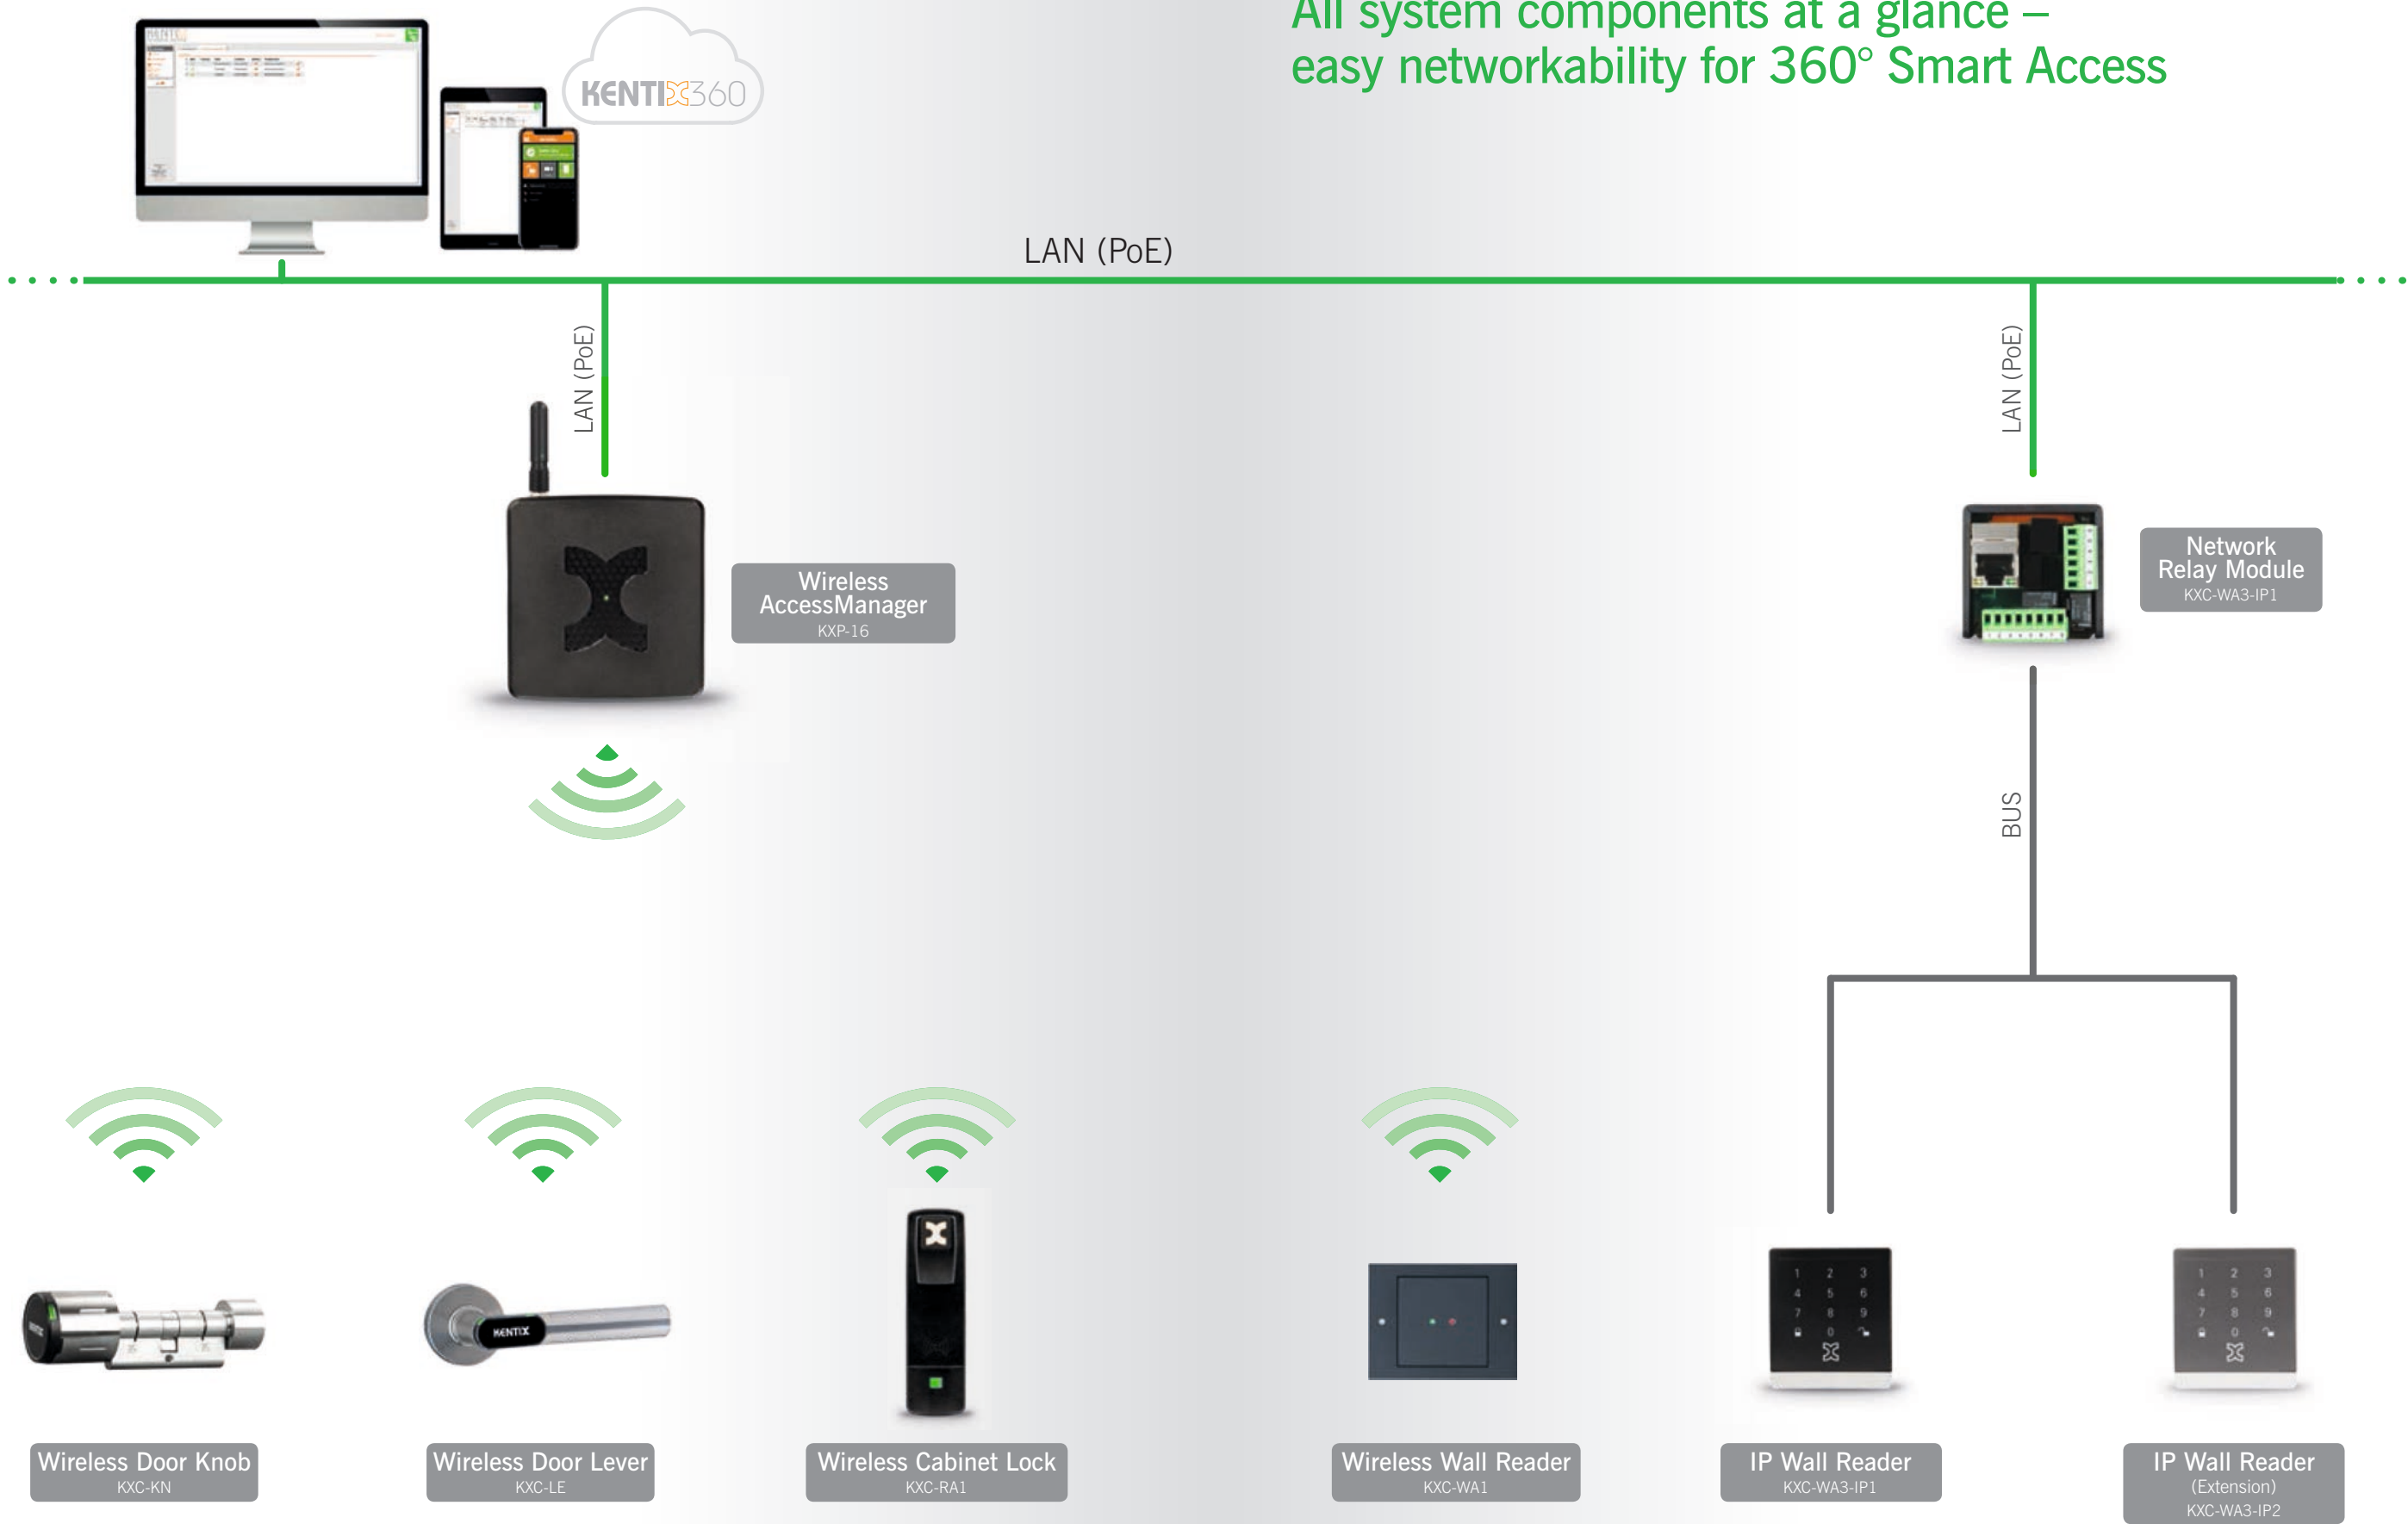

Wireless AccessManager

With the wireless DoorLock AccessManager you can easily manage time-user-profiles even for large projects. One AccessManager manages up to 16 doors and 5.000 users with time authorization profiles via web browser (HTTPS). Altogether, up to 999 AccessManager can be connected to one system of more than 15.000 doors. Power is supplied via Power over Ethernet (PoE). The integration of Microsoft Active Directory (AD) and LDAP makes access management particularly comfortable and the connection to the Kentix360 Cloud enables the control of the entire system from anywhere and at any time via app.



Products


Type	Housing color	Item number
Wireless AccessManager	Black	KXP-16-B
Wireless AccessManager	White	KXP-16-W

Accessories

Type	Item number
PoE Injector	KPOE150S
I/O Module with relay	KIO3
Gain Magnet Antenna	KXP-ANT-EXT1
USB Dektop Reader	KXC-DR1-MIFARE

Technical Details

Connectivity	LAN (PoE) – Integrated web server, a total of 999 Kentix AccessManager interconnectable
LAN	10/100 Mbit, integrated web server, communication ports: 80/443
Radio	868 MHz, encryption AES 128 Bit
Number of doors	Up to 16 wireless DoorLocks (doors) programmable
SD card	Micro SD card slot for cards up to 128GB
Kentix system socket	RJ45, for connecting external Kentix plug'n'play modules
Switch output (system socket)	2x Open Collector 0.1A/24V, optional: I/O Module (KIO3) 2x switch relay 1A/24V
Alarm input (system socket)	2x alarm input (potential-free), optional: I/O Module (KIO3)
SNMP	SNMP (V2/3), SNMP Traps (V2/3)
Power supply	PoE 12-72VAC/DC power consumption approx. 1.5W, PoE Class 1
Housing	Protection class IP20, 90 x 90 x 45 mm; weight approx. 100g; colors: black, white
Environmental conditions	Temperature 0 – 50°C, humidity 5-95%, non-condensing
Delivery content	AccessManager, antenna, mounting bracket, mounting material, 3m SlimLine cable
Audits	CE

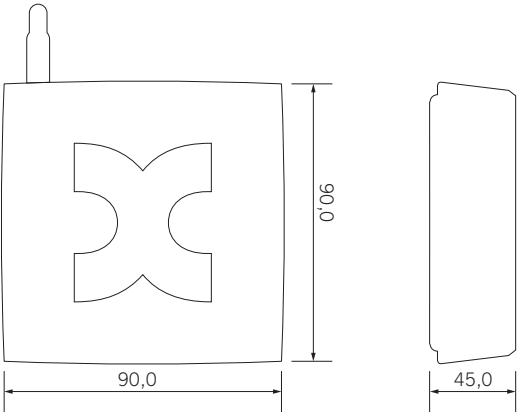

Wireless Door Fitting