


Delock 2.5" Converter USB 3.1 Micro-B female > M.2 / mSATA with enclosure

M.2

Description

This Delock converter enables the connection of a M.2 SSD in 2280, 2260, 2242 and 2230 format or a mSATA SSD in half size or full size format. If both slots are occupied, only the M.2 SSD can be used. The converter can be installed into the system through the USB interface.

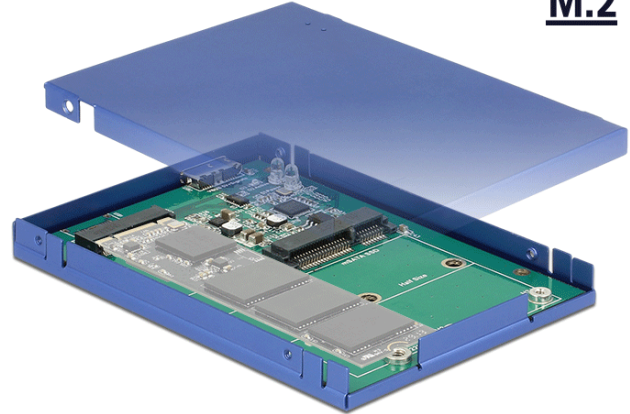

Specification

- Connector:
1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) Type Micro-B female >
1 x 67 pin M.2 key B slot
1 x mSATA slot (half size / full size)
- Interface: SATA
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.35 mm, application of double-sided assembled modules supported
- LED indicator
- Maximum current for M.2 module: 3 A
- Short circuit protection, thermal shutdown protection
- ESD protection up to 2 kV
- Dimensions (LxWxH): ca. 100 x 70 x 9 mm

System requirements

- Windows 7/7-64/8/8-64/8.1/8.1-64/10/10-64, Linux Kernel 3.19
- A free USB interface

Package content

- Converter
- 2.5" enclosure
- Fixing screw for M.2 module, mSATA module and enclosure
- USB cable, length: ca. 35 cm
- Cooling pad for M.2 and mSATA module
- User manual

Item No. 62731


EAN: 4043619627318

Country of origin: Taiwan, Republic of China

Package: Retail Box



Images



| General | |
|---|---|
| Form factor: | 2.5" |
| Slot: | SATA |
| Supported module: | M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA |
| Maximum height of the components on the module: | 1.35 mm application of double-sided assembled modules supported |
| Interface | |
| Connection 1: | 1 x USB 3.1 Gen 2 Type Micro-B female |
| Connection 2: | 1 x 67 pin M.2 key B slot |
| Connection 3: | 1 x mSATA slot (half size / full size) |
| Physical characteristics | |
| Length: | 100 mm |
| Width: | 70 mm |
| Height: | 9 mm |