


## OVERVIEW

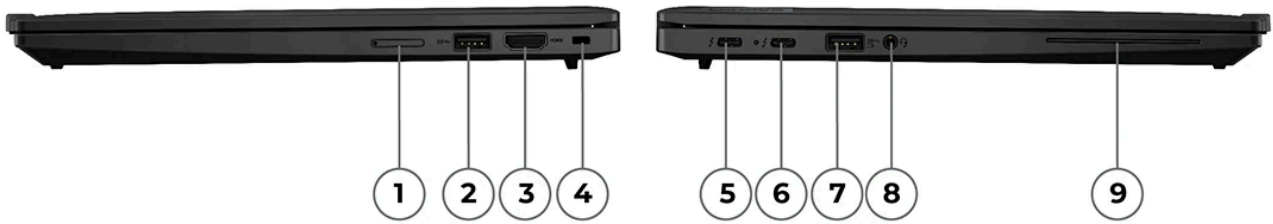

1. Nano-SIM card slot *	6. Thunderbolt 4
2. USB 3.2 Gen 1	7. USB 3.2 Gen 1 (Always On)
3. HDMI	8. Headphone / microphone combo jack (3.5mm)
4. Kensington Nano Security Slot	9. Smart card reader *
5. Thunderbolt 4	

Notes:

- Items with \* are only available on selected models

## PERFORMANCE

### Processor

#### Processor Family

13th Generation Intel® U or P Series Core™ i3 / i5 / i7 Processor

#### Processor\*\*<sup>[1]</sup>

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
Core i3-1315U	6 (2 P-core + 4 E-core)	8	P-core 1.2GHz / E-core 0.9GHz	P-core 4.5GHz / E-core 3.3GHz	10MB	Intel UHD Graphics
Core i5-1335U	10 (2 P-core + 8 E-core)	12	P-core 1.3GHz / E-core 0.9GHz	P-core 4.6GHz / E-core 3.4GHz	12MB	Intel Iris® Xe Graphics
Core i5-1340P	12 (4 P-core + 8 E-core)	16	P-core 1.9GHz / E-core 1.4GHz	P-core 4.6GHz / E-core 3.4GHz	12MB	Intel Iris Xe Graphics
Core i5-1345U	10 (2 P-core + 8 E-core)	12	P-core 1.6GHz / E-core 1.2GHz	P-core 4.7GHz / E-core 3.5GHz	12MB	Intel Iris Xe Graphics
Core i5-1350P	12 (4 P-core + 8 E-core)	16	P-core 1.9GHz / E-core 1.4GHz	P-core 4.7GHz / E-core 3.5GHz	12MB	Intel Iris Xe Graphics
Core i7-1355U	10 (2 P-core + 8 E-core)	12	P-core 1.7GHz / E-core 1.2GHz	P-core 5.0GHz / E-core 3.7GHz	12MB	Intel Iris Xe Graphics
Core i7-1360P	12 (4 P-core + 8 E-core)	16	P-core 2.2GHz / E-core 1.6GHz	P-core 5.0GHz / E-core 3.7GHz	18MB	Intel Iris Xe Graphics
Core i7-1365U	10 (2 P-core + 8 E-core)	12	P-core 1.8GHz / E-core 1.3GHz	P-core 5.2GHz / E-core 3.9GHz	12MB	Intel Iris Xe Graphics
Core i7-1370P	14 (6 P-core + 8 E-core)	20	P-core 1.9GHz / E-core 1.4GHz	P-core 5.2GHz / E-core 3.9GHz	24MB	Intel Iris Xe Graphics

Notes:

1. Intel P series processors are for special bid only.

### Operating System

#### Operating System\*\*<sup>[1]</sup>

- Windows® 11 Pro
- Windows 11 Home
- Windows 11 Home Single Language
- Windows 11 DG Windows 10 Pro 64
- Linux
- Ubuntu Linux
- No operating system

Notes:

1. Some features may not be supported on the system with Linux preload, including but not limited to Intel RST RAID, MIPI computer vision camera, WWAN, Human Presence Detection, etc.

### Graphics

#### Graphics\*\*

Graphics	Type	Memory	Key Features
Intel UHD Graphics	Integrated	Shared	DirectX® 12.1
Intel Iris Xe Graphics	Integrated	Shared	DirectX 12.1

### Monitor Support

#### Monitor Support<sup>[1]</sup>

Supports up to 4 independent displays (native display and 3 external monitors via Thunderbolt™ and HDMI®)

- Thunderbolt supports up to 5K@60Hz

- HDMI supports up to 4K@60Hz

## Notes:

1. Refresh rates >60hz also supported, however max resolution will be limited.

## Chipset

### Chipset

Intel SoC (System on Chip) platform

## Memory

### Max Memory

- 8GB soldered memory, not upgradable
- 16GB soldered memory, not upgradable
- 32GB soldered memory, not upgradable

### Memory Slots

Memory soldered to systemboard, no slots, dual-channel

### Memory Type

LPDDR5-4800<sup>[1]</sup>

## Notes:

1. Installed memory is actually 6400MHz but run at 4800MHz due to platform limitation.

## Storage

### Storage Support<sup>[1]</sup>

One drive, up to 2TB M.2 2280 SSD

### Storage Slot

One M.2 2280 PCIe® 4.0 x4 slot

### Storage Type\*\*

Disk Type	Interface	Offering	Security
M.2 2280 SSD	PCIe NVMe®, PCIe 4.0 x4	256GB / 512GB / 1TB	Opal 2.0
M.2 2280 SSD	PCIe NVMe, PCIe 4.0 x4 Performance	512GB / 1TB / 2TB	Opal 2.0

## Notes:

1. The storage capacity supported is based on the test results with current Lenovo® storage offerings. The system may support larger storage as the technology develops.

## Removable Storage

### Card Reader

No card reader

## Multi-Media

### Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

### Speakers

Stereo speakers, 2W x2, Dolby® Audio™

### Microphone

- Dual-microphone array, 360° far-field, Dolby Voice
- No microphone

### Camera\*\*

- 5.0MP + IR discrete, with privacy shutter, fixed focus
- HD 720p, with privacy shutter, fixed focus
- FHD 1080p, with privacy shutter, fixed focus
- No camera<sup>[1]</sup>

# ThinkPad X13 Gen 4 (Intel)

Notes:

1. No camera is for special bid only.

## Battery

### Battery\*\*

- Integrated Li-Polymer 41Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter
- Integrated Li-Polymer 54.7Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter

### Battery Life<sup>[1]</sup>

Configuration 1 (max battery life)

MobileMark® 25: up to 12.2 hr with 822 performance score @250nits

JEITA 2.0: up to 22.9 hr @150nits

Local video playback: up to 19.0 hr @150nits

Alternate configuration 2

MobileMark 25: up to 11.2 hr with 638 performance score @250nits

JEITA 2.0: up to 21.6 hr @150nits

Local video playback: up to 17.5 hr @150nits

Alternate configuration 3

MobileMark 25: up to 10.6 hr with 639 performance score @250nits

JEITA 2.0: up to 18.5 hr @150nits

Local video playback: up to 15.6 hr @150nits

Notes:

1. Configuration 1 (max battery life): WUXGA low power (non-touch), Intel i3-1315U, 8GB LPDDR5, Win 11, 54.7Wh battery, best power efficiency power mode Alternate configuration 2: WUXGA low power (non-touch), Intel i5-1340P, 16GB LPDDR5, Win 11, 54.7Wh battery, best power efficiency power mode Alternate configuration 3: WUXGA (touch), Intel i5-1350P, 16GB LPDDR5, Win 11, 54.7Wh battery, best power efficiency power mode All battery life claims are approximate maximum and based on results using [MobileMark 2018](#), [MobileMark 25](#), JEITA 2.0, continuous 1080p local video playback (using default Media Player in Fullscreen mode with 150nits brightness and default volume level), or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary depending on many factors such as product configuration, software, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time, ambient temperature and use. Refer to [Microsoft® link](#) for more information about the Windows Performance power slider.

## Power Adapter

### Power Adapter\*\*<sup>[1]</sup>

- 45W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 45W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- No power adapter<sup>[2]</sup>

Notes:

1. AC adapter offerings depend on the country.
2. No power adapter is for special bid only.

## DESIGN

## Display

### Display\*\*<sup>[1][2]</sup>

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle (L/R/U/D)	Key Features
13.3"	WUXGA (1920x1200)	None	IPS	300 nits	Anti-glare	16:10	1000:1	100% sRGB	85°/85°/85°/85°	-
13.3"	WUXGA (1920x1200)	None	IPS	400 nits	Anti-glare	16:10	1200:1	100% sRGB	85°/85°/85°/85°	Low power, Eyesafe®

										Certified 2.0, ICC Template color calibration
13.3"	WUXGA (1920x1200)	Multi-touch	IPS	300 nits	Anti-glare	16:10	1000:1	100% sRGB	85°/85°/85°/85°	-
13.3"	2.8K (2880x1800)	None	OLED	400 nits	Anti-glare, Anti-reflection, Anti-smudge	16:10	100000:1	100% DCI-P3	85°/85°/85°/85°	Dolby Vision™, DisplayHDR™ True Black 500, Eyesafe Certified 2.0

#### Color Calibration

- ICC Template color calibration
- No color calibration

#### Touchscreen

- On-cell multi-touch, supports 10-point touch
- Non-touch

#### Notes:

1. California Electronic Waste Recycling Fee In California USA, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, please go to <https://www.calrecycle.ca.gov/Electronics/Consumer>
2. IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

## Input Device

#### Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls

#### Keyboard Backlight

- LED backlight
- Non-backlight<sup>[1]</sup>

#### UltraNav™

TrackPoint® pointing device and glass-like Mylar® surface multi-touch touchpad, 61 x 115 mm (2.40 x 4.53 inches)

#### Notes:

1. Non-backlit keyboard is only available for the models with deep black cover.

## Mechanical

#### Dimensions (WxDxH)<sup>[1]</sup>

301.7 x 214.8 x 15.95 mm (11.88 x 8.46 x 0.63 inches)

#### Weight<sup>[2]</sup>

Models	Weight
Models with deep black CFRP top cover	Starting at 1.12 kg (2.47 lbs)
Models with deep black carbon fiber hybrid top cover	Starting at 1.09 kg (2.41 lbs)
Models with storm grey top cover	Starting at 1.25 kg (2.76 lbs)

#### Case Color\*\*

- Deep black
- Storm grey

#### Case Material\*\*

- Deep black models: carbon fiber hybrid or CFRP (top), aluminium (bottom)
- Storm grey models: aluminium (top), aluminium (bottom)

#### Notes:

1. The system dimensions may vary depending on configurations.
2. The system weight is approximate and based on results in Lenovo lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight

for each specific model.

## CONNECTIVITY

### Network

#### Ethernet

No onboard Ethernet<sup>[1]</sup>

#### WLAN + Bluetooth<sup>[2]</sup>

Intel Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1<sup>[3]</sup>

#### WWAN\*\*

- Wireless WAN upgradable to 4G (with antenna ready)<sup>[4]</sup>
- Fibocom FM350-GL, 5G Sub-6 GHz, M.2 Card, with embedded eSIM functionality
- Fibocom L860-GL-16, 4G LTE CAT16, M.2 card, with embedded eSIM functionality
- Quectel EM05-G, 4G LTE CAT4, M.2 card, with embedded eSIM functionality
- No support

#### SIM Card

No SIM card inbox

#### NFC

- Near Field Communication
- No support

#### Notes:

1. Ethernet support via optional Lenovo USB-C to Ethernet Adapter.
2. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitations.
3. Wi-Fi 6E full features might be limited by country level restrictions. Wi-Fi 6E only enabled on Windows 11 and operates as Wi-Fi 6 with Windows 10. 6GHz Wi-Fi 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi 6E, and the regional regulatory certifications & spectrum allocation.
4. Wireless WAN upgradable to 4G is ONLY available in EMEA.

### Ports<sup>[1]</sup>

#### Standard Ports

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 2x Thunderbolt 4 / USB4® 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort™ 2.0)
- 1x HDMI, up to 4K/60Hz
- 1x Headphone / microphone combo jack (3.5mm)

#### Optional Ports\*\*\*

- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)

#### Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed. USB 2.0: 480 Mbit/s; USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s; USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s; USB4 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s; USB4 40Gbps (USB 40Gbps): 40 Gbit/s; Thunderbolt 3/4: 40 Gbit/s

### Docking

#### Docking

Various docking solutions supported via Thunderbolt / USB-C.

For more compatible docking solutions, please visit [Docking for ThinkPad® X13 Gen 4 \(Intel\)](#)

### Monitor Cable

#### Monitor Cable\*\*\*

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to VGA Adapter
- Lenovo USB-C to DisplayPort Adapter

- No monitor cable

## SECURITY & PRIVACY

### Security

#### Security Chip

Discrete TPM 2.0, TCG certified

#### Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

#### Smart Card Reader

- Smart card reader
- No smart card reader

#### Fingerprint Reader

- Touch style fingerprint reader integrated in power button, match-on-chip
- No fingerprint reader

#### BIOS Security

- Power-on password
- Supervisor password
- System management password
- NVMe password
- FIDO (Fast Identity Online) authentication
- Certificate based BIOS authentication
- Firmware Resiliency 3.0

#### Other Security

- (Optional) Camera privacy shutter
- (Optional) IR camera for Windows Hello
- Glance by Mirametrix®
- Ultrasonic Human Presence Detection (IR camera models)

## MANAGEABILITY

### System Management

#### System Management\*\*

- Intel vPro® Enterprise<sup>[1]</sup>
- Intel vPro Essentials<sup>[2]</sup>
- Non-vPro

---

Notes:

1, 2 . Intel vPro offers a superset of DASH's defined capabilities.

## SERVICE

### Warranty<sup>[1]</sup>

#### Base Warranty\*\*

- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) limited onsite service
- No base warranty

---

Notes:

1 . The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://pcsupport.lenovo.com/warranty>.

## ENVIRONMENTAL

### Sustainability

#### Material

- 50% recycled aluminium on storm grey top cover
- 50% recycled aluminium or 90% recycled magnesium on keyboard cover
- 55% recycled aluminium on bottom cover
- 90% PCC recycled plastic used in speaker enclosure
- 90% PCC recycled plastic used in the battery enclosure
- 90% PCC recycled plastic used in standard 45W and 65W adapters
- Low-temperature solder
- Retail or standard packaging: plastic free packaging with 100% bamboo sugarcane fiber
- Bulk packaging: 90% recycled and FSC certified content

### Operating Environment

#### Temperature<sup>[1]</sup>

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

#### Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

#### Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

#### Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

## ACCESSORIES

### Bundled Accessories

#### Bundled Accessories

- Lenovo USB-C to Ethernet Adapter
- None

## CERTIFICATIONS

### Green Certifications<sup>[1]</sup>

#### Green Certifications<sup>[2]</sup>

- EPEAT™ Gold Registered
- ENERGY STAR® 8.0
- ErP Lot 6/26
- TCO Certified 9.0
- RoHS compliant

#### Notes:

1. The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration.
2. EPEAT is registered where applicable, please see <https://www.epeat.net> for registration status by country.

### Other Certifications

#### Mil-Spec Test

MIL-STD-810H military test passed

#### Other Certifications

- (Optional) Intel Evo™ Platform
- (Optional) Eyesafe Certified 2.0



- Feature with \*\* means that only one offering listed under the feature is configured on selected models.
- Feature with \*\*\* means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

