
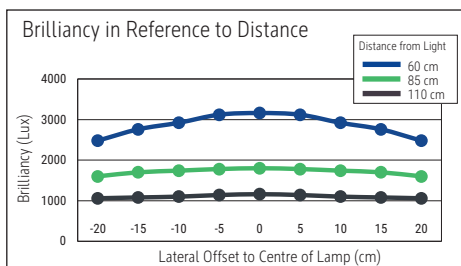


LED floor lamp MAULjava, dimmable

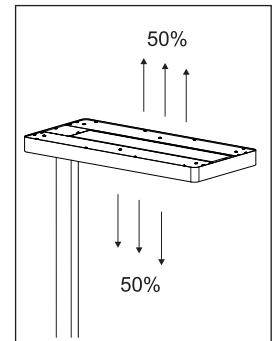

- **Stepless dimmer to adapt to the working conditions and personal needs**
- **Perceived as pleasant by everyone: Combined direct/indirect workplace lighting**
- **Approx. 50% upward and approx. 50 % downward light emission**
- **Double use: Direct lighting of the desk and indirect lighting of the room**
- **High energy efficiency: Latest LED technology**
- **Extremely economical**
- **GS-symbol for checked security, technical safety concept Made by MAUL**
- Closed lamp head
- Reduced glare to UGR <19 for fatigue-proof vision
- Guaranteed: No consumption in switch-off mode
- Convenient: Diffuser for reduction of shades
- Protection rating IP20
- Light source and operating device replaceable by an electrician
- Recyclable packaging

Illuminance of the : indirect: 2.520 lux illuminance at 85 cm distance, 1.560 lux illuminance at 110 cm distance - direct: 2.520 lux illuminance at 85 cm distance, 1.560 lux illuminance at 110 cm distance
 Colour temperature per light source: 4.000 Kelvin (neutral white)
 Number of light sources: 3
 Energy efficiency class per light source: C (spectrum A to G)
 Weighted energy consumption per light source: 68 kWh/1000 h (34 kWh/1000 h & 2 x 17 kWh/1000 h)
 Service life L70B50 per light source: 50.000 h
 Useful luminous flux per light source: 13.060 Lumen (6.500 Lumen & 2 x 3.280 Lumen)
 Material: Head: Aluminium - Column: Aluminium
 Dimensions: Head: 28 x 61 x 4.2 cm - Column: 3.5 x 5.3 cm
 Position of the switch: Column

- Stable, massive steel base, 30 x 45 cm. Split base fits around table legs. Hight: 196 cm
- Guarantee: 2 years

Art. No.	Colour	EAN-Code	Tariff-No.	Base	Cable length (approx.)	Protection class	Pack size / PU	Weight (incl. packaging)	PU
8258402	white	4002390081108	94052190	base	2.50 m	I shock-proof plug	118 x 39,5 x 14 cm	14.764 kg	1 pc(s).
8258490	black	4002390087230	94052190	base	2.50 m	I shock-proof plug	118 x 39,5 x 14 cm	14.764 kg	1 pc(s).
8258495	silver	4002390075060	94052190	base	2.50 m	I shock-proof plug	118 x 39,5 x 14 cm	14.764 kg	1 pc(s).