
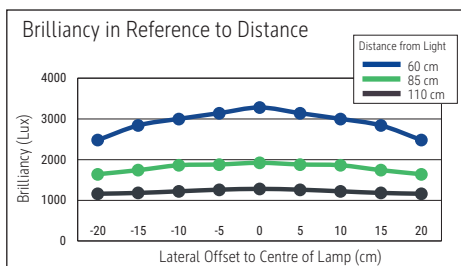


LED floor lamp MAULjuvis sensor, dimmable



- **Constant light control via motion and daylight sensors**
- **Infinitely adjustable dimmer depending on activity and individual needs**
- **Comfortable for everyone: Combined direct/indirect workstation lighting**
- **Approx. 50% light directed upward and approx. 50% downward**
- **Dual benefit: Direct light for the work surface and indirect light for general room illumination**
- **Practical: Diffuser for minimal shadow casting**
- **GS mark, technical safety concept "Made by MAUL"**
- Motion sensor: Automatically dims the light after 30 minutes without motion detection; turns off after another 30 minutes without motion detection
- Daylight sensor: Light output adjusts according to the interior lighting level
- Glare reduction to UGR <19 for fatigue-free viewing
- Switzerland: Also available with an adapter. Please add the suffix .CH to the part number
- IP20 protection rating
- Light source and ballast may be replaced by a qualified electrician

Illuminance of the : indirect: 2.920 lux illuminance at 85 cm distance, 1.840 lux illuminance at 110 cm distance - direct: 2.920 lux illuminance at 85 cm distance, 1.840 lux illuminance at 110 cm distance
 Colour temperature per light source: 4.000 Kelvin (neutral white)
 Number of light sources: 3
 Energy efficiency class per light source: C (spectrum A to G)
 Weighted energy consumption per light source: 68 kWh/1000 h (34 kWh/1000 h & 2 x 17 kWh/1000 h)
 Service life L70B50 per light source: 50.000 h
 Useful luminous flux per light source: 13060 lm (6500 lm & 2 x 3280 lm)
 Material: Head: Aluminium, metal - Column: Aluminium, metal
 Dimensions: Head: 28 x 61 x 4.2 cm - Column: 3.5 x 5.3 cm
 Position of the switch: Column

- Stable, massive steel base, 30 x 45 cm. Split base fits around table legs. Height: 196 cm

Art. No.	Colour	EAN-Code	Tariff-No.	Base	Cable length (approx.)	Protection class	Pack size / PU	Weight (incl. packaging)	PU
8258602	white	4002390081115	94052190	base	2,50 m	I shock-proof plug	119,5 x 39 x 17 cm	14,457 kg	1 pc(s).
8258690	black	4002390087247	94052190	base	2,50 m	I shock-proof plug	119,5 x 39 x 17 cm	14,457 kg	1 pc(s).
8258695	silver	4002390075077	94052190	base	2,50 m	I shock-proof plug	119,5 x 39 x 17 cm	14,457 kg	1 pc(s).