

Rittal – The System.

Faster – better – everywhere.

► Slide rail, 2 U, static installation, heavy duty for VX IT – VX 5302.033

Date : Sep 6, 2021

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Slide rail, 2 U, static installation, heavy duty for VX IT – VX 5302.033

created: 06.09.2021 on www.rittal.com/com-en

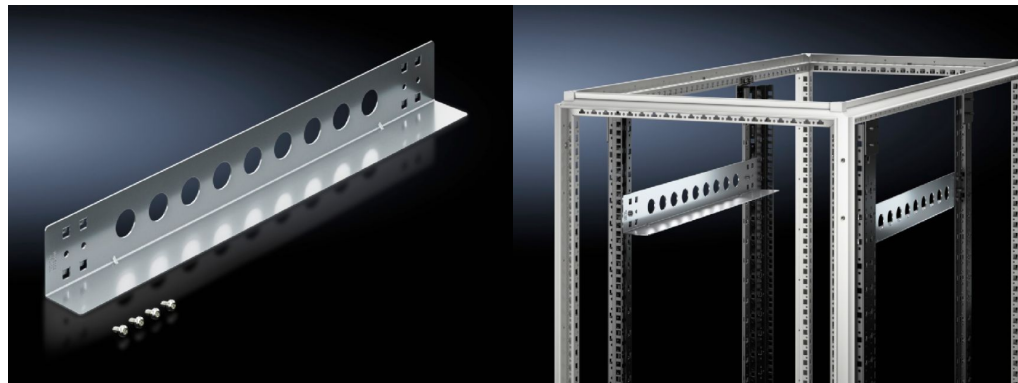

Product description

Description:	Side system punchings for mounting accessories and cooling components that expel to the side.
Benefits:	Simply locate into the system punchings of the 482.6 mm (19") mounting brackets after adjusting the required 482.6 mm (19") distance between levels
Applications:	For mounting on the front mounting level To support heavy installed equipment
Material:	Sheet steel
Surface finish:	Zinc-plated
Supply includes:	Assembly parts
Note:	Effective contact surface 35 mm per side

Product description

Installation options:	482.6 mm (19") mounting angles, standard 482.6 mm (19") mounting angles, dynamic
482.6 mm (19") distance between levels, standard:	625 mm
482.6 mm (19") distance between levels, dynamic:	625 mm

Load capacity:	2000 N, static
Packs of:	2 pc(s).
Weight/pack:	2.18 kg
Copper weight (kg per piece):	0
EAN:	4028177952621
Customs tariff number:	73269098
ETIM 7.0:	EC002620
ETIM 6.0:	EC002620
eCl@ss 8.0/8.1:	27189261
eCl@ss 6.0/6.1:	27182590
Product description:	Slide rail, 2 U, permanent installation, heavy duty, for VX IT, for mounting at the front mounting level, to support heavy installed equipment, effective contact surface each side 35 mm