


PARAPROJECT®

Case i15 BASKET

charging , synchronisation , transportation , protection , Flex2Connect

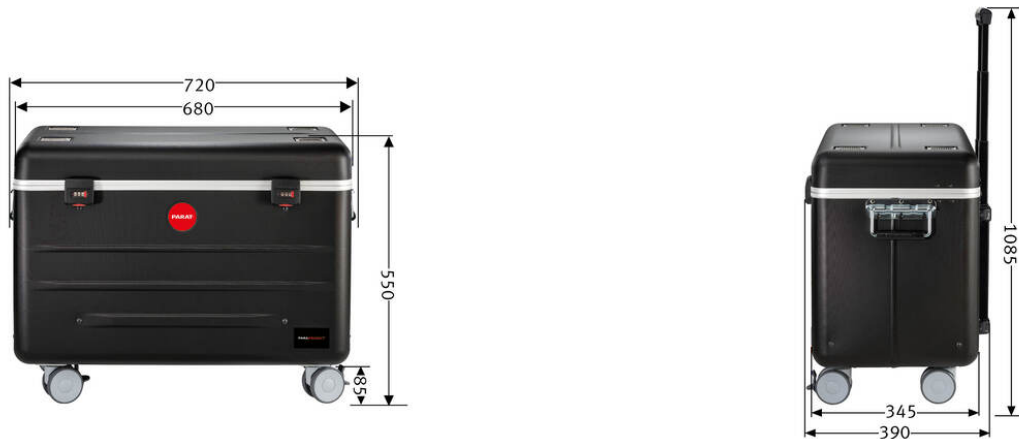

Part denomination	PARAPROJECT Case i15 BASKET Charge&Sync, incl. USB Lightning® cable, black
Part number	208.650-15101
GTIN /EAN	4006793002654
Field of application	Education , Health Care
Certificates	CE / REACH / RoHS
Applicable standards	DIN EN 60950-1 / DIN EN 55022 / DIN EN 55035
Scope of delivery	<ul style="list-style-type: none"> - PARAPROJECT® Case i15 BASKET - device connection cable, EU, length: 5 m - USB connection cable, length: 3 m - 15 data and charging cable with LED display USB-A to Lightning® - y-adapter, C14 plug with 1 IBM sockets (C5, 3-pin) and 1 x EURO-8-socket (C7, 2-pin, AUX 1) - y-adapter, C14 plug with 1 Euroflat socket (2-pin) and 1 EURO-8-socket (C7, 2-pin, AUX 2) - 3 baskets with colored, replaceable padded inserts for carrying handle (red, blue, orange and green) - user guide - 3 baskets with colored, replaceable padded inserts for carrying handle (red, blue, orange and green)
Materials	<ul style="list-style-type: none"> - X-ABS plastic - aluminium - industrial leather
Transport	4-fold telescopic handle / 2 carrying handles / combination lock / 4 smooth-running castors ø 75 mm (with 2 lockable castors)
External dimensions (WxDxH)	720 mm x 390 mm x 550 mm
Weight	17000 g
Transport dimensions	760 mm x 420 mm x 570 mm
Dimensions of euro-pallets	1200 mm x 800 mm x 1860 mm
Number of euro-pallet	6
customs tariff number	85044083
Country of origin	RO

PARAPROJECT®

Case i15 BASKET

charging , synchronisation , transportation , protection , Flex2Connect


Fittings	<ul style="list-style-type: none"> - Interior technical equipment: - storage compartment (W x D x H: 530 x 240 x 320 mm) for 3 removable baskets with 5 compartments each for iPads - storage compartments (W x D x H: 30 x 310 x 320 mm) for master laptop - storage compartment for accessories such as access point, router and/or Apple TV - sync and charging unit - 15 data and charging cable with LED display USB-A to Lightning® - temperature sensor - overvoltage protection - Case lid: - pocket with zipper, pocket with velcro fastener and push-in compartment with rubber loop - air vents in the lid and bottom tray - External technical equipment: - central power supply with protective cap - main switch - 4-fold telescopic handle - 2 carrying handles - combination lock - 4 smooth-running castors ø 75 mm (with 2 lockable castors)
Compatible devices	All iPad from generation 4, as well as mini
Max. number of devices	15
Operating system	iOS
Cable types for equipment	data and charging cable with LED display USB-A to Lightning® ; y-adapter, C14 plug with 1 IBM sockets (C5, 3-pin) and 1 EURO-8-socket (C7, 2-pin, AUX 1) ; y-adapter, C14 plug with 1 Euroflat socket (2-pin) and 1 EURO-8-socket (C7, 2-pin, AUX 2)
Power supply	central power supply for all devices
Output power per port	5 V/up to 2,4 A up to 12 w
Optional accessories	<ul style="list-style-type: none"> - data and charging cable USB-C® to USB-C® - data and charging cable USB-C® to Lightning® - data and charging cable USB-A to Lightning® - data and charging cable USB-A to USB-C®
Lock types	combination lock
Connections	<ul style="list-style-type: none"> - outside: - central power supply with protective cap - USB-B port for sync function - RJ 45 network socket for e.g. access point - optional: HDMI port - inside: - main switch - 16 USB-A for Flex2Connect - Y-Adapter Kabel, C14-Stecker auf 1 IBM-Buchse (C5, 3-polig) und 1 Euro-8-Buchse (C7, 2-polig, AUX 1) - Y-Adapter Kabel, C14-Stecker auf 1 Euroflach-Buchse (2-polig) und 1 Euro-8-Buchse (C7, 2-polig, AUX 2)
Data of currents	<ul style="list-style-type: none"> - 100 - 240 V - max. 3,6 A - 50/60 Hz
Dimension of pockets	(B x T x H) 530 x 240 x 320 mm / max. Größe 230 x 270 mm
Dimensions of other pockets	305 x 240 x 320 mm
Color	black

product image similar / information without content / subject to errors and changes / all dimensions in mm

PARAPROJECT®

Case i15 BASKET

charging , synchronisation , transportation , protection , Flex2Connect

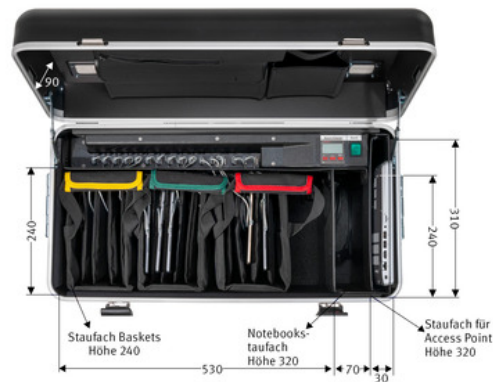

- central power supply with protective cap
- USB-B terminal for sync
- network connector (RJ45) for access point
- optional HDMI port



- 3 removable baskets for easy handling