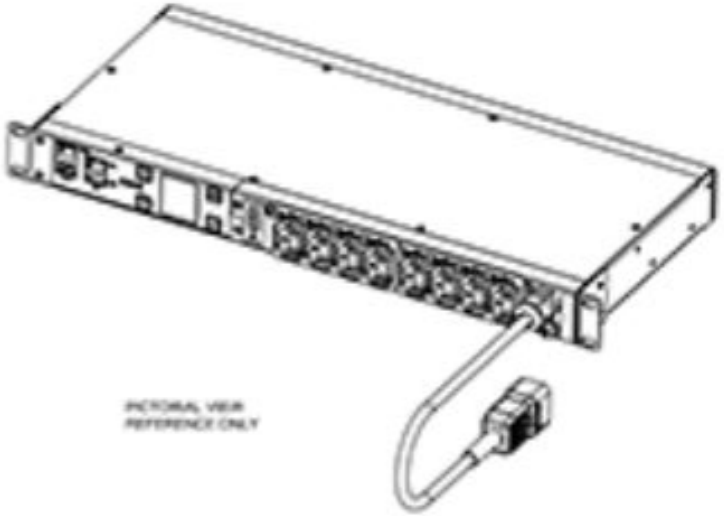

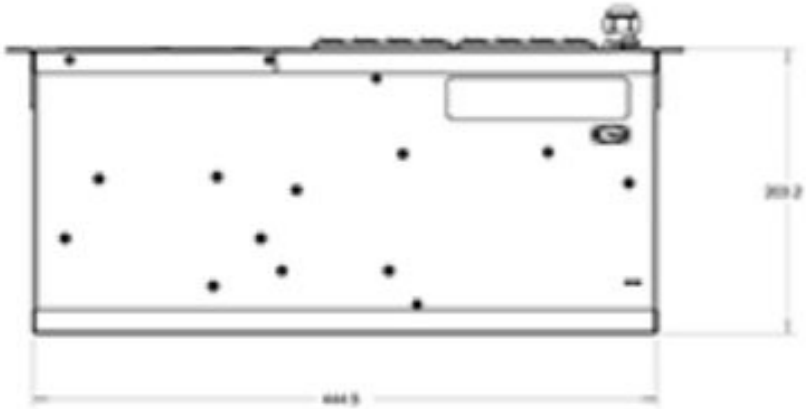

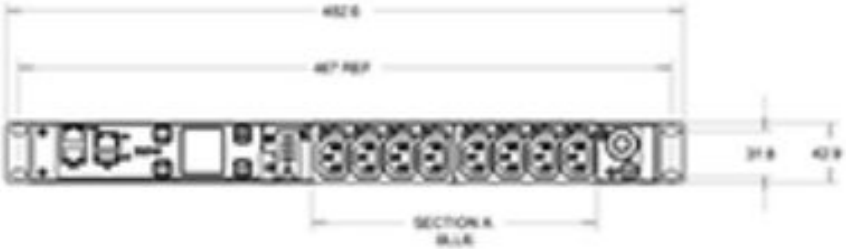



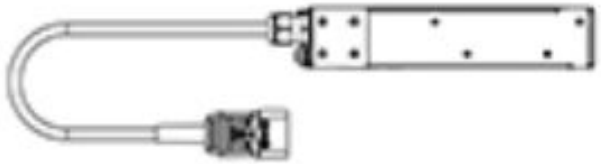

CABLE SHOWN NOT TO SCALE

ESWH28	G3 SWITCHED		
FUNCTIONALITY	INPUT	OUTPUT	ENVIRONMENTAL
CURRENT POWER AND ENERGY METERING FOR INPUT, BRANCH AND OUTLETS. INDIVIDUAL OUTLET CONTROL	IEC 60309 C20 16A 230V~ 1P+N+PE 1.9MM HO5 POWER CORD CABLE LENGTH: 3.0 M	(8) IEC 60320 C13 DRIP	0 TO 60 C
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
LENGTH: 203.2MM WIDTH: 444.5 MM DEPTH: 42.9MM ALUMINUM CHASSIS, BLACK 19 INCH RACK MOUNT	1Ø 200-240V~ 1P+N+PE 50/60HZ 16A	200-240V~ 50/60HZ 16A PER C13 16A MAX TOTAL	CE, CB
CIRCUIT BREAKERS	FILTER AND SPIKE/SURGE	ACCESSORIES	CONFIGURATION
NONE	NONE	STANDARD KSP011 - 1U INSTALL NETWORK PACK OPTIONAL EMP001 - ENVIRONMENTAL PROBE	ESWH28-F-A28/1/2MM

EATON