
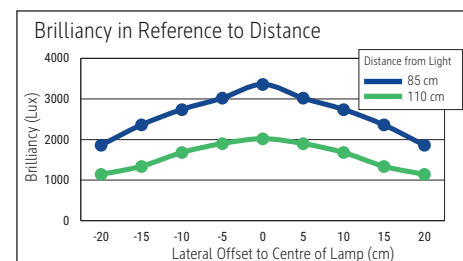
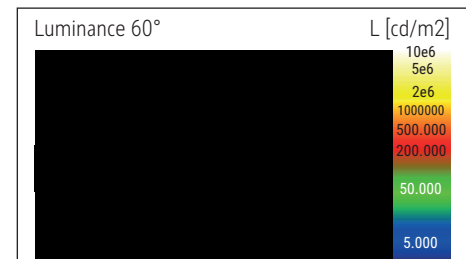
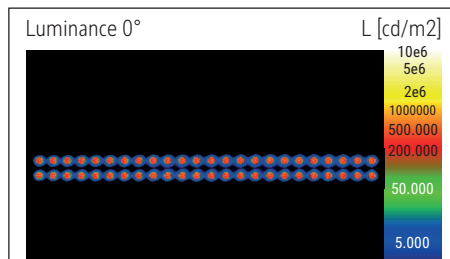
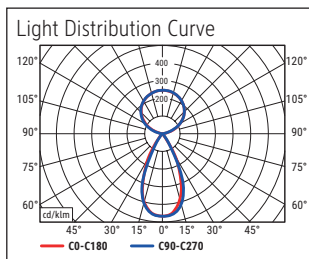


LED floor lamp MAULsirius colour vario sensor, dimmable

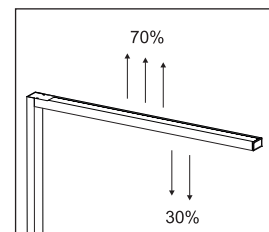

- High-quality, powerful aluminium design lamp with modern light management
- Constant light control via movement and daylight sensors
- Colour temperature and intensity adjustable depending e.g. on time of day
- Dimmer infinitely adjustable according to individual requirements
- Gentle on the eyes: Reduced glare to UGR <6 for fatigue-proof vision
- High quality of light: Beam direction 70 % upwards (indirect room lighting) and 30 % downwards (direct light for work surface), separately controllable
- GS-symbol for checked quality, technical safety concept Made by MAUL
- Movement sensor: Dims the light automatically after 30 minutes without sensing movement, turns off after a further 30 minutes without sensing movement

- Daylight sensor: The light output of the lamp changes depending on the indoor illuminance level
- Light source and operating device replaceable by an electrician
- Recyclable packaging

Illuminance of the : indirect: 2.560 lux illuminance at 85 cm distance, 1.440 lux illuminance at 110 cm distance - direct: 3.360 lux illuminance at 85 cm distance, 2.020 lux illuminance at 110 cm distance
 Colour temperature per light source: 3.000 Kelvin (warm white) to 5.700 Kelvin (daylight white)
 Number of light sources: 2
 Energy efficiency class per light source: D (spectrum A to G)
 Weighted energy consumption per light source: 66 kWh/1000 h (46 kWh/1000 h & 20 kWh/1000 h)
 Service life L70B50 per light source: 50.000 h
 Useful luminous flux per light source: 10.110 Lumen (7.087 Lumen & 3.023 Lumen)
 Material: Head: Aluminium, metal - Column: Aluminium, metal
 Dimensions: Head: 102 x 6.4 x 3.5 cm - Column: 3.5 x 6.4 cm
 Movement: Head: fixed
 Position of the switch: Column

- Heavy, solid foot made from steel, 50 x 22,5 cm. Height: 195,5 cm
- Guarantee: 2 years

Art. No.	Colour	EAN-Code	Tariff-No.	Base	Cable length (approx.)	Protection class	Pack size / PU	Weight (incl. packaging)	PU
8259202	white	4002390081122	94052190	base	2.50 m	I shock-proof plug	115,5 x 30,5 x 11 cm	13.613 kg	1 pc(s).
8259290	black	4002390087254	94052190	base	2.50 m	I shock-proof plug	115,5 x 30,5 x 11 cm	13.613 kg	1 pc(s).
8259295	silver	4002390075411	94052190	base	2.50 m	I shock-proof plug	115,5 x 30,5 x 11 cm	13.613 kg	1 pc(s).