Technical Specifications

HP P24v G5 FHD Monitor




Front

Power Button 2. Power LED

Technical Specifications

HP P24v G5 FHD Monitor

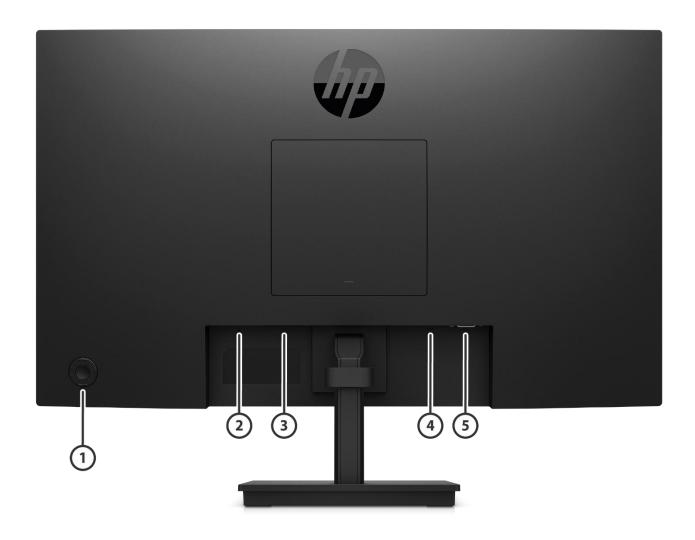

- 1. Joypad OSD button
- 2. Security Cable Slot
- 3. Power Connector

Back

- 4. HDMI 1.4 Port
- 5. VGA Port

Technical Specifications

Model: 64W18AA

Panel Specifications Display Size (Diagonal) 23.8 inch

Panel TechnologyVAMax Refresh Rate75Hz

Native ResolutionFHD (1920 x 1080)Panel Bit Depth8 bit (6 bit + FRC)

Aspect Ratio16:9Brightness (Typical)250 nitsContrast Ratio (Static)3000:1Dynamic Contrast Ratio8M:1

Flicker FreeYes (TÜV certified)Pixel Pitch0.27 mm x 0.27 mm

Pixels Per Inch (PPI) 93 PPI

Display Colors Up to 16.7 million colors supported

30k

Backlight Lamp Life Minimum (To Half

Brightness - In Hours)

Backlight TypeEdge-litScreen TreatmentAnti-glareHardness3HHaze25%

Response Time (Typical) 5ms GtG (with overdrive)

Horizontal Viewing Angle (Typical

Cr>10)

Vertical Viewing Angle (Typical Cr>10) 178°

Panel Active Area Metric (W X H) 52.59 x 29.58 cm Panel Active Area Imperial (W X H) 20.70 x 11.65 in

NOTE: Performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

Color NTSC 72%

Color Management Color Space/ Subsampling Support RGB 4:4:4 **RGB Channel Adjust** Yes, Gain

Default Color Temperature Standard (6500K)

Monitor Specifications Bezel Type 3-sided borderless

Color Of Stand Black
Color Of Head Black
Tilt -5~+23°

Vesa Mounting 100 mm x 100 mm

Security Lock Standard Security Lock Slot

Detachable Stand Yes

Warranty 3/3/0 for LA, NA, EMEA, APJ (3/3/3 in select APJ Countries)

Low Blue Light Yes, (TÜV certified)

Management Software HP Display Center, HP Display Manager*

*Host PC requires Windows 10. HP Display Center is available on

the Microsoft store.

Technical Specifications

On Screen	Display
(OSD)	

On Screen Display Brightness+, Color Control, Image Control, Input Control,

Power Control, Menu Control, Management, Information,

Exit

Native Resolution FHD (1920 x 1080)

NOTE: HDMI 1.4 & VGA required to drive panel at its native

resolution.

The video card of the connected PC must be capable of

supporting 1920x1080 at 60 Hz with 8-bit color using one HDMI

or VGA.

Maximum Resolution

Preset Graphic Modes/Supported

Resolutions

1920 x 1080 (FHD) 640 x 480 @ 60Hz

640 x 480 @ 75Hz (HDMI only)

720 x 400 @ 70 Hz 800 x 600 @ 60 Hz

800 x 600 @ 75 Hz (HDMI only)

1024 x 768 @ 60 Hz

1024 x 768 @ 75 Hz (HDMI only)

1280 x 720 @ 60 Hz 1280 x 800 @ 60 Hz 1280 x 1024 @ 60 Hz

1280 x 1024 @ 75 Hz (HDMI only)

1440 x 900 @ 60 Hz 1600 x 900 @ 60 Hz 1680 x 1050 @ 60 Hz

1920 x 1080 @ 50 Hz (HDMI only)

1920 x 1080 @ 60 Hz

1920 x 1080 @ 75 Hz (HDMI only)

Minimum Vertical Scan Rate48 HzMaximum Vertical Scan Rate75 HzMinimum Horizontal Scan Rate55.6 kHzMaximum Horizontal Scan Rate90.8 kHzMaximum Pixel Clock94.0 MHzUser Programmable ModesYes, 10

User-Assignable Function Buttons Yes, 4 (VGA: 6 options, HDMI: 5 options)

11 (English, Spanish, German, French, Italian,

Languages Netherlands, Portuguese, Japanese, T-Chinese, S-Chinese

and Russian)

Connector Types

 HDMI
 1 HDMI 1.4

 HDCP
 Yes, HDMI

 VGA
 1 VGA

Special Features

SWITCH Monitor Power button

Next Active Input / Up button Brightness / Down button Information / Left button Color / Right button Menu / Enter button



Technical Specifications

User Presets 11 (VGA) / 17 (HDMI)

Power & Operating

Power Supply Specs

Power Source 100 - 240 VAC 50/60 Hz

Power Consumption- Max 30 W **Energy Saving/Stand By Mode** 0.5 W **Power Consumption - Typical** 20 W

Energy Star Data Operational Mode at 100 VAC 14.3 W

> 14.3 W Operational Mode at 115 VAC Operational Mode at 230 VAC 14.3 W

EU Energy Efficiency Class (ErP LOT-5)

On-mode Power Consumption for Standard Dynamic Range (SDR) ErP LOT5 Energy Efficiency Class for Standard Dynamic Range (SDR)

17W



Internal

Operating Conditions

5°-35°C **Operating Temperature - Celsius Operating Temperature - Fahrenheit** 41° - 95°F Non-Operating Temperature - Celsius -40° - 65°C Non-Operating Temperature --40° - 149°F

Fahrenheit

Operating Humidity 20 – 80% Relative Humidity (non-condensing)

Non-Operating Humidity 5 - 95%

0 – 5.000 m (16.400 ft.) **Operating Altitude Non-operating Altitude** 0 - 12,192 m (40,000 ft.)

Certifications and Compliances

Yes* Low Halogen

*External power supplies, WWAN modules, power cords,

cables and peripherals excluded.

Agency Approvals and Certifications WW application

CE,CB,KC/KCC/NOM/PSB/ICE/TUV-Bauart/ISO 9241-307/TUV flicker free/ TUV LBL/ BIS/ UAE safety/ UAE

RoHS/ Ukraine safety/ South Africa safety/

EAC/CSA/PSB/ISC/CCC/CEL/CECP/SEPA/TCO/TCO Certified

Edge/Energy Star/ISC/VCCI/FCC/BSMI/Vietnam MEPS/Australian-New Zealand MEPS/WEEE/CEC

Microsoft WHOL Certification Win 11, Win 10, Win 8, Win 7 Yes, ENERY STAR®

ENERGY STAR® Certified EPEAT® Registered

Regions need to verify by country

EPEAT® registered*

*Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. Status varies by country. Visit

http://www.epeat.net for more information.

CEL Grade 2 China Energy Label

TCO Certified Edge Yes **TCO Certified** Yes

SmartWay Transport Partnership - NA

only

Yes (NA sku)



QuickSpecs

Technical Specifications

Contains Recycled Plastics	Contains Recycled Plastics Recyclable Packaging (Box, packing materials)	85% ITE-derived closed loop *Recycled plastic content per definition set in the IEEE 1680 Molded Paper Pulp Cushion in sustainably sourced and recy *100% outer box packaging a	centage is based on the 0.1-2018 standard. side box is 100% clable*
		made from sustainably source fibers.	ed certified and recycled
		<u>Metric</u>	<u>Imperial</u>
Unit Product/Package Specifications	Product Dimensions (Unpacked with stand) (W x D x H)	53.89 x 18.05 x 39.78 cm	21.22 x 7.11 x 15.66 in
•	Product Dimensions (Packed) (W x D x H)	59.5 x 12.4 x 39.1 cm	23.43 x 4.88 x 15.39 in
	Display Head Dimensions (Unpacked without stand) (W x D x H)	53.89 x 5.143 x 32.36 cm	21.22 x 2.02 x 12.74 in
	Base Area Footprint (w x d mm)	173.97 x 169.97 mm	6.85 x 6.69 in
	Bezel Measurements	Top: 1.4 mm	Top: 0.55 in
	(Unpacked with stand) (W \times D \times H)	Sides: 1.4 mm	Sides: 0.55 in
		Bottom: 20.2 mm	Bottom: 7.95 in
	Product Weight	3.57 kg	7.86 lb
	(Unpacked with stand)	F 40 kg	12.1 lb
	Product Weight (Packed)	5.49 kg	12.1 lb
	Product Weight (Head Only)	3.17 kg	6.99 lb
Pallet Information	Pallet Dimensions	Slip Sheet:	Slip Sheet:
	(L x W x H mm)	1200 x 1000 x 1967 mm	47.24 x 39.37 x77.44 inch
		(20 ft &40 ft) Slip Sheet:	(20 ft &40 ft) Slip Sheet:
		1200 x 1000 x 2358 mm	47.24 x 39.37 x 92.83 inch
		(40 HQ)	(40 HQ)
		Pallet:	Pallet:
		1200x1000 x 2100 mm	47.24 x39.37 x 82.68 inch
		(20 ft & 40 ft)	(20 ft & 40 ft)
		Pallet:	Pallet:
		1200 x 1000 x 2494 mm	47.24 x 39.37 x 98.19 inch
		(40 HQ)	(40 HQ)
	Pallet Total Weight	Slip Sheet:	Slip Sheet:
		439.2 kg (20 ft & 40 ft)	968.27 lb (20 ft & 40 ft)
		Slip Sheet:	Slip Sheet:
		527.04 kg (40 HQ) Pallet:	1161.92 lb (40 HQ) Pallet:
		459.2kg (20 ft & 40 ft)	1012.36 lb (20 ft & 40 ft)
		Pallet:	Pallet:
		547.04 kg (40 HQ)	1206.02 lb (40 HQ)
	Pallet Layers	5 or 6 (slip sheet & pallet)	. 250.02 to (1011q)
4			



Technical Specifications

Pallet Product per Layer

Total Products per Pallet 80 or 96 per pallet (slip sheet & pallet)

Container Load, 20-Foot Container Load, 40-Foot

Container Load, 40-Foot HighQ

800 (slip sheet and pallet) 1680 sets (slip sheet and pallet) 2016 sets (slip sheet & pallet)

16 (slip sheet & pallet)

What's in the box?

AC power cord (1.83m) 6ft HDMI 1.4 cable (1.8m) 5.9ft

Warranty Doc kit

Quick Setup Poster

User Guide and Warranty Languages **User Guide Languages**

Warranty Languages

Arabic, Bahasa Indonesia, Bulgarian, Chinese-S, Chinese-T, Czech, Danish, Dutch, English, Estonian, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Kazakh, Korean, Latvian, Lithuanian, Norwegian, Polish, Portuguese (Brazilian), Portuguese (Iberian), Romanian, Russian, Serbian, Slovak, Slovenian, Spanish, Swedish, Thai, Turkey, Ukrainian

English US (EN), English AP (EN-AP), English LA (EN-LA), English UK (EN-GB), Arabic (AR) -17x, Bahasa Indonesia

(ID), Bosnian (BS), Bulgarian (BG), Chinese-S (CN), Chinese-T (TW), Croatian (HR), Czech (CS), Danish (DA), Dutch (NL), Estonian (ET), Finnish (FI), French Canadian (FC), French European (FR), German (DE), Greek (EL), Hebrew (HE), Hungarian (HU), Italian (IT), Japanese (JA), Kazakh (KK), Korean (KO), Latvian (LV), Lithuanian (LT), Norwegian (NO), Polish (PL), Portuguese, Brazilian (BR), Portuguese, Iberian (PT), Romanian (RO), Russian (RU), Serbian (SR), Slovak (SK), Slovenian (SL), Spanish, Castilian (ES-ES), Spanish, Latin America (ES-MX),

Swedish (SV), Thai (TH), Turkish (TR), Ukrainian (UK),

Vietnamese (VI)



Technical Specifications

FNVIRONMENTAL DATA

ENVIRONMENTAL DATA				
Eco-Label Certifications &	This product has received or is in the process of being certified to the following approvals			
declarations	and may be labeled with one or more of these marks:			
	 IT ECO declaration 			
	 US ENERGY STAR® 			
	 US Federal Energy Mar 	nagement Program (FEMP)		
	EPEAT ^a Gold registered	l in the United States. See http	o://www.epeat.net for	
	registration status in y	our country.		
	 TCO Certified 			
	China Energy Conserva	tion Program (CECP)		
	China State Environme	ntal Protection Administration	n (SEPA)	
	Taiwan Green Mark			
	Korea Eco-label			
	 Japan PC Green label* 			
	·			
Sustainable Impact	• 85% ITE – derived closed loop	plastic		
Specifications	• Low halogen			
	Outside Box and corrugated cu	ushions are 100% sustainably	sourced and recyclable	
	Molded Paper Pulp Cushion in:	side box is 100% sustainably s	sourced and recyclable	
System Configuration	The configuration used for the I	Energy Consumption and Decl	ared Noise Emissions data for	
3	the Notebook model is based or			
		,, , ,		
Energy Consumption				
(in accordance with US ENERGY				
STAR® test method)	115VAC, 60Hz	230VAC, 50Hz	100VAC, 50Hz	
Normal Operation (Short idle)	11.86 W	11.69 W	11.92 W	
Normal Operation (Long idle)	11.86 W	11.69 W	11.92 W	
Sleep	0.21 W	0.26 W	0.2 W	
Off	0.07 W 0.13 W		0.07 W	
	Note: Energy efficiency data listed is a model family. HP computers manapplicable U.S. Environmental F computers. If a model family do energy efficiency data listed is a high efficiency power supply, and	arked with the ENERGY STAR® Protection Agency (EPA) ENER(pes not offer ENERGY STAR® co for a typically configured PC fe	Logo are compliant with the GY STAR® specifications for ompliant configurations, then eaturing a hard disk drive, a	
Heat Dissipation*	115VAC, 60Hz	230VAC, 50Hz	100VAC, 50Hz	
Normal Operation (Short idle)	40.6 BTU/hr	40 BTU/hr	40.8 BTU/hr	
Normal Operation (Long idle)	40.6 BTU/hr	40 BTU/hr	40.8 BTU/hr	
Sleep	0.7 BTU/hr	0.9 BTU/hr	0.7 BTU/hr	
Off	0.2 BTU/hr	0.4 BTU/hr	0.2 BTU/hr	
	*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.			

Technical Specifications

Longevity and Upgrading	This product	This product can be upgraded, possibly extending its useful life by several years.		
	Upgradeable	e features and/or components contained in the		
		Spare parts are available throughout the warranty period and or for up to "5" years after the end of production.		
Additional Information		This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC.		
		s HP product is designed to comply with the Waste ipment (WEEE) Directive – 2002/96/EC.	Electrical and Electronic	
		s product is in compliance with California Propositi		
		e Drinking Water and Toxic Enforcement Act of 19		
		s product is in compliance with the IEEE 1680 (EPE	AT) standard at the Gold level,	
		www.epeat.net		
		stics parts weighing over 25 grams used in the pro	duct are marked per	
		11469 and IS01043.	and of at and of life	
	• Ini	s product is 98.9% recycle-able when properly disp	oosed of at end of life.	
Packaging Materials	External:	PAPER/Paperboard	547 g	
		PAPER/Molded Pulp	987 g	
	Internal:	PLASTIC/Polyethylene high density - HDPE	40 g	
	The plastic	packaging material contains at least 0.0% recycle	d content.	
	The corrugated paper packaging materials contains at least 90% recycled content.			
RoHS Compliance	HP Inc. complies fully with materials regulations. We were among the first companies to extend the restrictions in the European Union (EU) Restriction of Hazardous Substances (RoHS) Directive to our products worldwide through the HP GSE. HP has contributed to the development of related legislation in Europe, as well as China, India, and Vietnam.			
	We believe the RoHS directive and similar laws play an important role in promoting industry-wide elimination of substances of concern. We have supported the inclusion of additional substances—including PVC, BFRs, and certain phthalates—in future RoHS legislation that pertains to electrical and electronics products. We met our voluntary objective to achieve worldwide compliance with the new EU RoHS requirements for virtually all relevant products by July 2013, and we will continue to extend the scope of the commitment to include further restricted substances as regulations continue to evolve.			
	To obtain a	copy of the HP RoHS Compliance Statement, see H	IP RoHS position statement.	
Material Usage	(refer to the	does not contain any of the following substances HP General Specification for the Environment at hp.com/hpinfo/globalcitizenship/environment/su		
		estos tain Azo Colorants		



Technical Specifications

	Certain Brominated Flame Retardants – may not be used as flame retardants in
	plastics
	Chlorinated Hydrocarbons Chlorinated Boynffine
	Chlorinated Paraffins Control of the Contr
	Bis(2-Ethylhexyl) phthalate (DEHP)
	Benzyl butyl phthalate (BBP)
	Dibutyl phthalate (DBP)
	Diisobutyl phthalate (DIBP)
	Formaldehyde
	Halogenated Diphenyl Methanes
	Lead carbonates and sulfates
	Lead and Lead compounds
	Mercuric Oxide Batteries
	 Nickel – finishes must not be used on the external surface designed to be
	frequently handled or carried by the user.
	Ozone Depleting Substances
	 Polybrominated Biphenyls (PBBs)
	 Polybrominated Biphenyl Ethers (PBBEs)
	 Polybrominated Biphenyl Oxides (PBBOs)
	Polychlorinated Biphenyl (PCB)
	Polychlorinated Terphenyls (PCT)
	 Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging
	has been voluntarily removed from most applications.
	Radioactive Substances
	 Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
Danka siya Hanas	
Packaging Usage	HP follows these guidelines to decrease the environmental impact of product packaging:
	Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium
	in packaging materials.
	Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
	Design packaging materials for ease of disassembly.
	Maximize the use of post-consumer recycled content materials in packaging materials.
	materials.
	Use readily recyclable packaging materials such as paper and corrugated materials. Paduse size and weight of packages to improve transportation find officiency.
	Reduce size and weight of packages to improve transportation fuel efficiency. Restinguished and provided according to 1500 111000 and RIN 61300. Reduce size and weight of packages to improve transportation fuel efficiency.
	 Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.
	Stalludius.
End-of-life Management and	HP offers end-of-life HP product return and recycling programs in many geographic areas.
Recycling	To recycle your product, please go to: http://www.hp.com/go/reuse-recycle or contact your
	nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of
	in a responsible manner.
	The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment
	information for each product type for use by treatment facilities. This information (product
	disassembly instructions) is posted on the Hewlett Packard web site at:



Technical Specifications

	http://www.hp.com/go/recyclers. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.		
HP, Inc. Corporate	For more information about HP's commitment to the environment:		
Environmental Information			
	Global Citizenship Report		
	http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html Eco-label certifications http://www8.hp.com/us/en/hp-information/environment/ecolabels.html ISO 14001 certificates:		
	http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842 and		
	http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf		
footnotes	 Percentage of ocean-bound plastic contained in each component varies by product Recycled plastic content percentage is based on the definition set in the IEEE 1680.1-2018 standard. 		
	 External power supplies, WWAN modules, power cords, cables and peripherals excluded. 		
	 100% outer box packaging and corrugated cushions made from sustainably sourced certified and recycled fibers. 		
	 Fiber cushions made from 100% recycled wood fiber and organic materials. Plastic cushions are made from >90% recycled plastic. 		



Technical Specifications

© Copyright 2022 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.



Summary

Change Log				
July 22, 2022	V1 to V2	Updated	Pallet Information	
July 28, 2022	V2 to V3	Updated	Pallet Information and Contains Recycled Plastics	
	V3 to V4			

