


DATASHEET

Connecting module Cat.7 600MHz with IDC - terminal

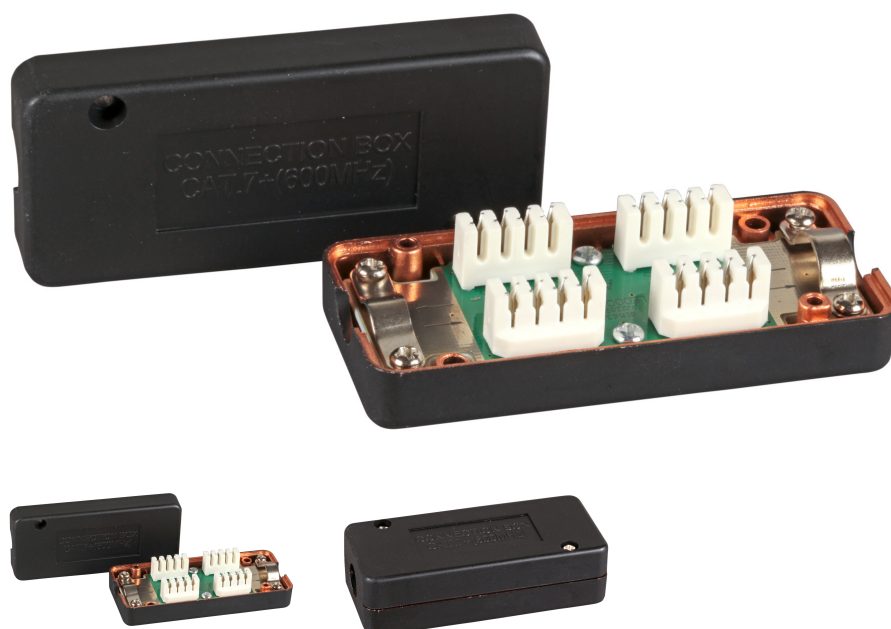

General data

Cat.7 up to 600 MHz with IDC-terminals. The connection module can be used to extend installation cable or reconnect damaged cables without having to install a complete cable segment. The two cable ends are connected with LSA insulation displacement terminals. All standard 4- or 8-core installation cables from AWG 26-22 can be worked up to a sheath diameter of 10 mm
Housing metallized inside

Accessory

Screw-type strain relief (M3x12)
Cable inlet (4 x)
With adhesive tapes for fixing

Allgemeine Daten

Suitable for litz wire conductor	False
AWG-range	26 - 22
Max. cable diameter	10.0 mm
Current Rating	1,5 A
Suitable for degree of protection (IP)	IP20
Suitable for solid core	True
Connection type	LSA
Category	7

This datasheet was created automatically on 03-07-2023 . Technical changes reserved.



DATASHEET

Connecting module Cat.7 600MHz with IDC - terminal

Suitable for flat cable	False
Special tool necessary	False
Suitable for round cable	True
Complaint to UL94	V-0

Mechanische Eigenschaften

Housing material	Plastic
Dust cover	false
Type of locking	Rastverriegelung
360° shield contact	True
Shield contact and strain relief separate	False

Elektrische Eigenschaften

Contact Resistance	20 mΩ
Dielectric Withstanding Voltage	1000 V AC 60Hz
Insulation Resistance	500 MΩ
screened	True

Available variants

ArtNr.	Bezeichnung	Colour	Transparent
37596.1	Connecting module Cat.7 600MHz with IDC - terminal	black	False

This datasheet was created automatically on 03-07-2023 . Technical changes reserved.

