


# Delock PCI Express Card > 4 x Serial RS-232

## Description

The PCI Express card by Delock expands a PC by four external serial ports. Different devices such as scanner, printer, mouse etc. can be connected to this card. By using the included low profile brackets, the PCI Express card can be also installed into a Mini-PC.

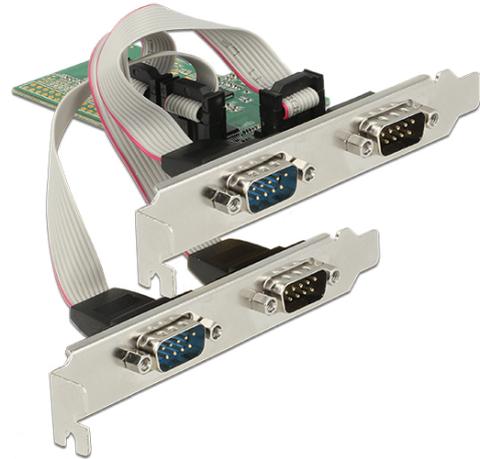

## Specification

- Connector:
  - external:
    - 2 x serial RS-232 DB9 male
    - 2 x serial RS-232 DB9 male (separate rear bracket)
  - internal:
    - 1 x PCI Express x1, V2.0
- Chipset: ASIX AX99100
- Data transfer rate up to 230.4 Kb/s
- FIFO: 256 byte
- Compatible with 16C950 UART

## System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express slot

## Package content

- PCI Express card
- Slot bracket
- 4 x low profile bracket
- Driver CD
- User manual

## Item No. 89557

EAN: 4043619895571

Country of origin: China

Package: Retail Box



## Images



**General**

|                             |                    |
|-----------------------------|--------------------|
| Supported operating system: | Windows 7 32-bit   |
|                             | Windows 7 64-bit   |
|                             | Windows 8.1 32-bit |
|                             | Windows 8.1 64-bit |
|                             | Windows 10 32-bit  |
|                             | Windows 10 64-bit  |

**Interface**

|           |  |
|-----------|--|
| External: | 2 x serial RS-232 DB9 male                         |
|           | 2 x Serial RS-232 DB9 male (seperate rear bracket) |
| Internal: | 1 x PCI Express x1, V2.0                           |

**Technical characteristics**

|                     |                  |
|---------------------|------------------|
| Chipset:            | ASIX AX99100     |
| Data transfer rate: | up to 230.4 Kb/s |
| FIFO:               | 256 Byte         |
| UART:               | 16C950           |

**Physical characteristics**

|               |             |
|---------------|-------------|
| Slot bracket: | low profile |
|               | standard    |