


BAREBONE XPC slim DS20U7V2

Version V2: upgraded with 2.5G network port

FANLESS SLIM PC WITH A COMET-LAKE-U PROCESSOR IN INDUSTRIAL DESIGN

The DS20UV2-series is a fanless slim PC with a robust 1.3-litre metal chassis and exceptional connectivity. It supports two digital video outputs for UHD/4K displays and one traditional D-Sub/VGA connector. The built-in Intel "Comet-Lake-U" processor provides ample performance for playback of 2160p/60 videos. Installation of components goes straight forward, as there is plenty of interior space for two memory modules, one 2.5" drive and an M.2-2280 SSD card. Optionally, an LTE module can be fitted in the 2.5" bay using the WVN03 accessory. Thanks to its passive cooling, the system is virtually maintenance-free and is approved for 24/7 nonstop operation. It is big on performance, yet extremely energy-efficient. The Shuttle XPC slim Barebone DS20UV2 series is an ideal platform for professional applications such as digital signage, POS, Kiosk, Thin Client, Office PC and Multimedia.

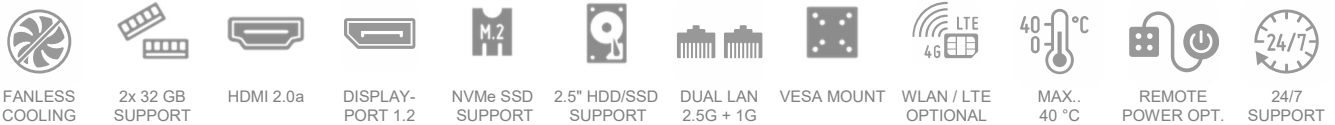

SLIM DESIGN

- Slim 1.3-litre metal chassis, black
- Dimensions: 20 x 16.5 x 3.95 cm (LWH)
- Including Stand and VESA mount (75/100 mm)
- Supports 24/7 Nonstop Operation
- Operating temperature: 0~40 °C (non-condensing)

OPERATING SYSTEM

- An operating system is not included
- Supports Windows 10/11 and Linux (64-bit)

PROCESSOR

- Intel Core i7-10510U processor, 4/8 cores, 1.8~4.9 GHz, Gen. 10, code-name "Comet Lake-U", max. 15W TDP
- Fanless heatpipe cooling system

GRAPHICS

- Integrated Intel UHD graphics, 4K support (features depend on processor)
- Supports three independent displays

MEMORY SUPPORT

- 2x 260-pin SO-DIMM slot
- Supports DDR4-2666
- max. 2x 32 GB

STORAGE – SATA / M.2

- 1x 2.5" bay for SATA hard disk or SSD
- 1x M.2-2280M slot (supports PCIe x4 NVMe or SATA)
- 1x M.2-2230E for optional WLAN

CONNECTORS

- HDMI 2.0a
- DisplayPort 1.2
- VGA
- 2x audio (line out, mic)
- 4x USB 3.2 Gen1
- 4x USB 2.0
- 1x internal USB 2.0
- SD card reader
- Dual LAN: 2.5G (Intel 225) und 1G (Intel 219)
- 1x COM port (1x RS232/422/485)
- Connector for external power button
- "Always on" Jumper
- DC-input 12 V or 19 V

POWER SUPPLY

- External 65W/19V power adapter (also supports 12 V power adapter)

OPTIONAL ACCESSORIES

- WLAN Module (WLN-M / WLN-M1)
- LTE-kit (WVN03)
- Rackmount kit (PRM01)
- Cable for external power button (CXP01)
- DIN-Rail mounting kit (DIR01)
- 2nd COM port RS232 (PCP11)



MODELS OF THE DS20UV2 SERIES

| Product | Processor | Cores / Threads | CPU Clock | L3 Cache | DDR4 Clock | USB 3.2 | UPC Code |
|-----------------|----------------------|-----------------|-------------|----------|------------|-----------------|--------------|
| DS20UV2 | Intel Celeron 5205U | 2 / 2 | 1.9 GHz | 2 MB | 2400 MHz | Gen 1 (5 Gbps) | 887993005331 |
| DS20U3V2 | Intel Core i3-10110U | 2 / 4 | 2.1~4.1 GHz | 4 MB | 2666 MHz | Gen 2 (10 Gbps) | 887993005348 |
| DS20U5V2 | Intel Core i5-10210U | 4 / 8 | 1.6~4.2 GHz | 6 MB | 2666 MHz | Gen 2 (10 Gbps) | 887993005355 |
| DS20U7V2 | Intel Core i7-10510U | 4 / 8 | 1.8~4.8 GHz | 8 MB | 2666 MHz | Gen 2 (10 Gbps) | 887993005362 |

Remark: The previous **DS20U** series features Dual LAN with 1+1 Gbps, whereas **DS20UV2** series features Dual LAN with 2.5G+1G.

PRODUCT FEATURES



Robust, stylish and Extremely Small

You should have held it in your own hands to experience how small it actually is. Barely 1.3 litre in volume, its rigid steel chassis design meets the high standards towards quality and stability that are essential for professional applications like digital signage. Despite its diminutive size, the processing power inside the DS20U7V2 is sufficient to meet the needs of the most demanding multimedia and computational workloads. Other than rough environments, its sleek and stylish look also blends seamlessly in both home and office.



Ease of installation thanks to bay covers

The Shuttle XPC slim Barebone DS20U7V2 features two practical bay covers at the bottom of the chassis which make the installation or upgrade of hardware components a breeze. No cable is required and no cooling system needs to be installed.



No fan noise and approved for 24/7 operation

A large heatsink is concealed behind a plastic cover and cools down the processor in a passive way without any fan. Using an SSD drive instead of a hard disk makes the system virtually noiseless and hence perfectly suitable for noise-sensitive environments like e.g. a library, living room, music studio or even a bedroom. The Shuttle XPC slim Barebone DS20U7V2 is officially approved for 24/7 permanent operation – even at ambient temperatures of up to 40 °C (non-condensing).



Energy-efficient Processor

This XPC is equipped with an energy-efficient ultra low voltage (ULV) processor which belongs to Intel's 10th-generation Intel Core processor family codenamed "Comet Lake-U". It is soldered to mainboard and passively cooled by a large heatsink. As a result of further integration, it comes as a system-on-a-chip (SoC) without the need of an extra chipset.



Dual 4K Display support

The DS20U7V2 features two digital video outputs: HDMI 2.0a and DisplayPort 1.2 which both can run at 4K (3840 x 2160 / 2160p) high resolution at 60 Hz frames per second. Furthermore, the DS20U7V2 supports an D-Sub/VGA port which can be used simultaneously.



One M.2-Slot for SSD cards

The M.2-2280 slot supports one M.2 SSD storage card with NVMe PCIe or SATA interface. Type 2280 means, it supports the usual M.2 cards with a width of 22 mm and a length of 80 mm, but also 2242 and 2260 standard cards are supported.




Dual Intel LAN with 2.5G + 1G

The Shuttle XPC slim Barebone DS20U supports Dual LAN with Intel network adapters, which are popular for their excellent performance and driver compatibility and are the preferred choice for professional environments. One LAN port supports super fast data transfer at 2.5 Gbps.



VESA mount

The supplied 75/100mm VESA mount allows for installation on to walls or monitors which is particularly interesting for the industry segment, company buildings and public institutions. Other than this, the chassis bears numerous threaded holes (M3) enabling it to be fitted almost anywhere.



Power on after Power fail

The BIOS setup provides a "Power-On after Power Fail" function that can be found under "Power Management Configuration". As the name indicates, this function determines the PC's behaviour after power failure: (1) unconditional power on, (2) restore former status (3) keep system turned off (4) Power-On by LAN or (5) Power-On by Real-Time-Clock. As a matter of the nature of this function, it may fail after short power failures. This is why the DS20U7V2 also comes with a hardware-based solution. By removing Jumper JP9 the system will start unconditionally once power is applied.



External power button by separate remote line

If, because of space constraints (e.g. in case of fixed installation), the machine cannot be switched on by pressing the front power button, it can be powered on by a separate remote line. You will find an appropriate four-pin connector at the back panel of the DS20U7V2 (pitch 2.54 mm). Furthermore, this connector provides a Clear CMOS function and +5V DC voltage supply for external devices.




Front and Back Panel

Front panel



Back panel

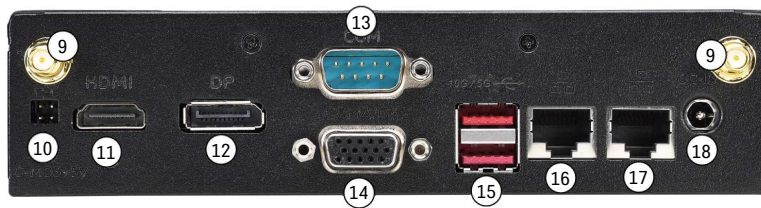


1. 2x USB 3.2 Gen 2 port
2. 4x USB 2.0 port
3. LED indicator for power state
4. LED indicator for storage activity
5. Power button
6. SD card reader
7. Microphone input
8. Headphones output
9. 2x WLAN perforation
10. 4-pin connector (2.54 mm pitch) for external power button, Clear CMOS button and 5V DC voltage
11. HDMI 2.0a port
12. DisplayPort 1.2
13. COM port supports RS232/RS422/RS485
14. D-Sub/VGA port for analog displays
15. 2x USB 3.2 Gen 2 port
16. RJ45 LAN port (2.5 Gbps)
17. RJ45 LAN port (1 Gbps)
18. DC-in connector for power adapter

19. Hole for Kensington Lock (the lock-and-cable is not included)

20. VESA mount (two parts)

Mainboard

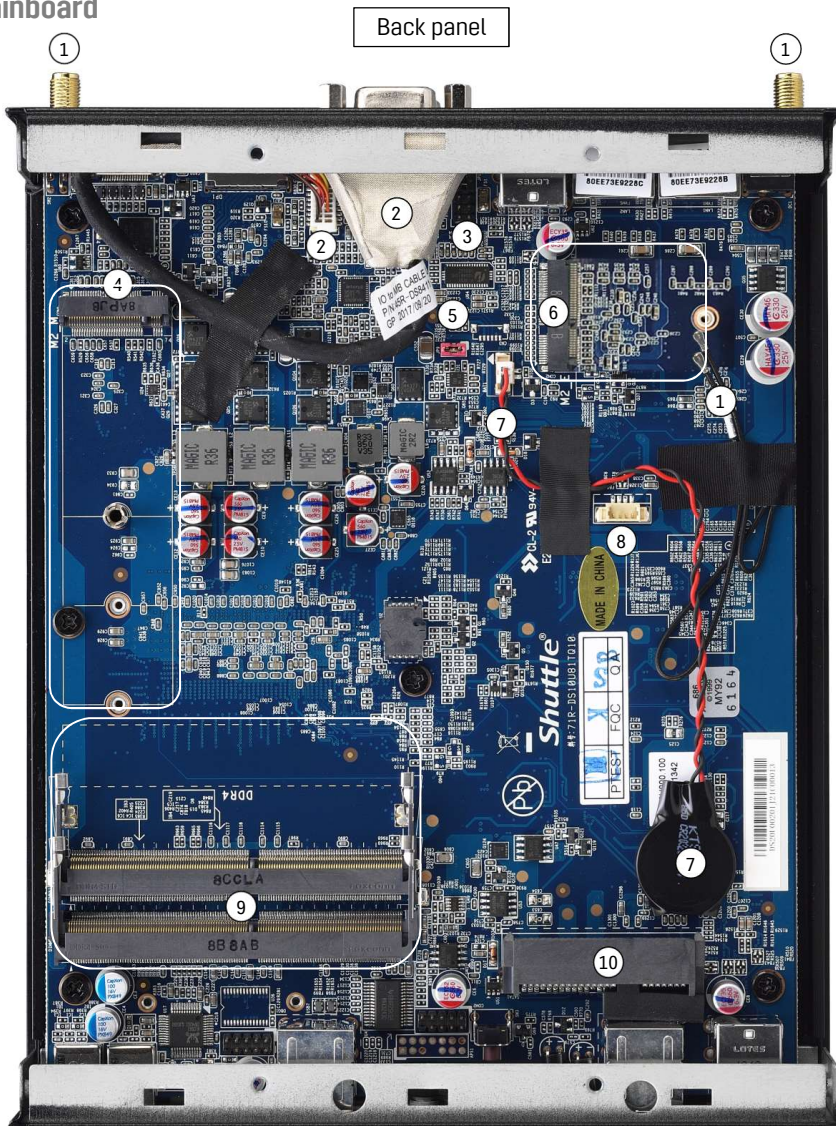

Back panel

Back view



Front view



Front panel

1. 2x pre-installed WLAN cable for optional antenna
2. D-Sub/VGA port with cable to the onboard connector
3. Onboard COM 2 port supports RS232
4. M.2-2280M slot for SSD card (also supports M.2-2260/2242)
5. Always-Power-On jumper (JP9)
6. M2-2230E slot for optional WLAN card
7. CMOS battery with cable to the onboard connector
8. Onboard USB 2.0 connector (4-pin)
9. 2x S0-DIMM memory slot (260-pin)
10. SATA/Power connector for the 2.5" bay
11. WLAN module (not included)
12. Mounting bracket for the 2.5" drive (hard disk or SSD)

REQUIRED COMPONENTS

The following components need to be added to make it a fully-configured Mini PC

Shuttle XPC slim Barebone DS20U7V2
with removed bay covers



Memory Modules
Up to two DDR4-2666 (or higher)
SO-DIMM memory modules
max. 32 GB each



2.5" Storage Drive
SATA hard disk or Solid State Disk (SSD)
(max. height: 12.5 mm)



M.2 SSD (optional)
M.2-2280/2260/2242
SSD storage (SATA or PCIe x4/NVMe)



Operating System
Windows 10/11 or Linux (64-bit only)

OPTIONAL ACCESSORIES FROM SHUTTLE



WLAN-Accessory
WLN-M / WLN-M1
M.2-2230 card supports
WLAN and Bluetooth
including 2 antennas



Cable CXP01
Cable for external push button
switch (without button)



LTE Adapter Kit WWN03
allows the installation of an
M.2 LTE card and nano SIM
card (occupies the 2.5" bay).
The LTE and SIM card are not
included.



DIN-Rail Kit DIR01
This mounting kit allows the in-
stallation on a standard 35
mm DIN-Rail







COM Port Adapter PCP11
If two COM ports are required,
the existing VGA port may be
removed and replaced by
PCP11 instead.



Rack Mount Kit PRM01
2U front plate to install up to
two 1.3L Shuttle XPCs in a 19"
cabinet.

Shuttle Product Comparison

| MODEL | DS20U(V2) Series | DS10U Series |
|----------------------|---|---|
| Processor | Intel Gen. 10 "Comet Lake-U" , TDP= 15W, 14 nm DS20U(V2): Celeron 5205U, 2/2 cores, 1.9 GHz DS20U3(V2): Core i3-10110U, 2/4 cores, 2.1/4.1 GHz DS20U5(V2): Core i5-10210U: 4/8 cores, 1.6/4.2 GHz DS20U7(V2): Core i7-10510U, 4/8 cores, 1.8/4.8 GHz | Intel Gen. 8 "Whiskey Lake-U" , TDP= 15W, 14 nm DS10U: Celeron 4205U, 2/2 cores, 1.8 GHz DS10U3: Core i3-8145U, 2/4 cores, 2.1/3.9 GHz DS10U5: Core i5-8265U: 4/8 cores, 1.6/3.9 GHz DS10U7: Core i7-8565U, 4/8 cores, 1.8/4.6 GHz |
| RAM Support | 2x SO DIMM (260-pins) max. 2x 32 GB DDR4-2400/2666 | 2x SO DIMM (260-pins) max. 2x 32 GB DDR4-2133/2400 |
| 2.5" bay | Supports 2.5" SATA drive max. height: 12.5 mm | Supports 2.5" SATA drive max. height: 12.5 mm |
| M.2-2280 slot | M.2-2280 supports NVMe/PCIe X4 and SATA | M.2-2280 supports NVMe/PCIe X4 and SATA |
| Audio | Realtek ALC897/ALC662 | Realtek ALC662 |
| Dual LAN | DS20U-Series: Intel i211 (1 Gbps) + i219LM (1 Gbps) DS20UV2-Series: Intel i225 (2.5 Gbps) + i219 (1 Gbps) | Intel i211 + i219LM |
| WLAN | optional (pre-mounted antenna cables) | Realtek RTL8821AE 2x External Antenna Supports 802.11-ac (1T1R) |
| Front Panel | On/Off button Power LED, HDD LED 2x USB 3.2 Gen 2 (red) *) 4x USB 2.0 SD card reader 2x Audio ports | On/Off button Power LED, HDD LED 2x USB 3.2 Gen 2 (red) *) 4x USB 2.0 SD card reader 2x Audio port |
| Back Panel | HDMI 2.0a DisplayPort 1.2 D-Sub/VGA 2x USB 3.2 Gen 2 (red) *) 2x Gigabit LAN (RJ45) 1x COM (RS232/RS422/485) 4-pin power on connector | HDMI 2.0a DisplayPort 1.2 D-Sub/VGA 2x USB 3.2 Gen 2 (red) *) 2x Gigabit LAN (RJ45) 1x COM (RS232/RS422/485) 4-pin power on connector 2x external WLAN antenna |
| DC-in port | Supports 12 V and 19 V | Supports 12 V and 19 V |
| Power Adapter | 65 W (19V, 3.42 A) 3-pin AC plug with earthed safety plug | 65 W (19V, 3.42 A) 2-pin AC plug |
| Vertical Stand | included | included |
| VESA Mount | included | included |
| Optional Accessories | CXP01: cable for ext. power button PRM01: 2U rack-mount kit DIR01: DIN-Rail mounting kit PCP11: RS232 COM port instead of VGA WWN03: LTE kit for 2.5" drive bay WLN-M/-M1: WLAN kit with external antennas | CXP01: cable for ext. power button PRM01: 2U rack-mount kit DIR01: DIN-Rail mounting kit PCP11: RS232 COM port instead of VGA WWN03: LTE kit for 2.5" drive bay |
| Front View |  |  |
| Back View |  |  |

*) Note: DS10U and DS20U with Celeron processor supports USB 3.2 Gen 1 (blue connector) only

SHUTTLE XPC SLIM BAREBONE DS20U7V2 – SPECIFICATIONS

| | |
|-------------------------------|--|
| FANLESS AND SILENT | <p>Passive cooling, no fan noise at all</p> <p>Perfect to be used in noise-sensitive environments</p> <p>Fanless, dust-free and thus virtually maintenance-free</p> |
| LOW POWER CONSUMPTION | <p>Power consumption in idle mode with 2.5" SSD under Windows 10: ca. 6 W only</p> |
| 24/7 NONSTOP OPERATION | <p>This device is approved for 24/7 permanent operation.</p> <p>Requirements:</p> <ul style="list-style-type: none"> - Free circulation of air amongst the PC must be guaranteed. - Ventilation holes must stay clear. - If a hard disk is installed, this must also be approved for permanent operation by its manufacturer |
| CHASSIS | <p>Slim-PC with black steel chassis</p> <p>Without cooling fan, passive cooling only</p> <p>The bays for memory, 2.5" drive and M.2 card can easily be accessed by removing two cover plates.</p> <p>Dimensions: 200 x 165 x 39.5 mm (LWH) = 1.3 litres</p> <p>Weight: 1.5 kg net and 2.2 kg gross</p> <p>Two holes for Kensington Lock and numerous threaded holes (M3) at both sides of the chassis</p> |
| OPERATION POSITION | <p>1) Vertical: Usual operating position with the supplied feet (DisplayPort output facing up).</p> <p>2) VESA-mounted: The device can also be mounted behind an appropriate monitor using the supplied VESA mount kit.</p> <p>Note: From a thermal point of view horizontal operation is permitted. However, there are no rubber feet on the device. The maximum operating temperature is 35 °C then.</p> |
| OPERATING SYSTEM | <p>This barebone system comes without operating system.</p> <p>It is compatible with Windows 10/11 (64-bit) and Linux (64-bit).</p> |
| PROCESSOR | <p>Model: Intel Core i7-10510U (ULV)</p> <p>System-on-a-chip architecture (SoC) with integrated memory and graphics controller</p> <p>FCBGA1528 package - directly soldered onto the mainboard</p> <p>Code name: Comet Lake U (10th Generation Intel Core)</p> <p>Cores / Threads: 4 / 8</p> <p>Base frequency: 1.8 GHz</p> <p>Max. Turbo frequency: 4.9 GHz</p> <p>Intel Smart Cache: 8 MB</p> <p>TDP wattage: 15 W maximum</p> <p>Manufacturing process: 14nm</p> <p>Maximum Tjunction Temperature: 100 °C</p> <p>Supports 64-bit, VT-x (EPT), VT-d, Enhanced SpeedStep, NX bit, AES-NI, SSE 4.1/4.2</p> |
| INTEGRATED GRAPHICS | <p>Intel UHD Graphics</p> <p>GPU clock frequency: 300~1150 MHz</p> <p>Execution Units (EUs): 24</p> <p>Supports DirectX 12, OpenGL 4.5</p> <p>Supports full H264, H265 8/10 bit, VP8/9, VC-1, AVC hardware decoding</p> <p>Supports Quick Sync Video and Clear Video HD technology</p> <p>Supports up to three independent screens:</p> <ol style="list-style-type: none"> 1) DisplayPort 1.2 supports Ultra HD @ 60 Hz 2) HDMI 2.0a supports Ultra HD @ 60 Hz 3) D-Sub/VGA supports analog displays |
| MAINBOARD / BIOS | <p>Shuttle Mainboard FS20</p> <p>All capacitors are high quality solid capacitors</p> <p>Supports resume after power failure [6]</p> <p>Supports Wake on LAN (WOL)</p> <p>Supports Power on by RTC Alarm</p> <p>Supports boot from M.2 SSD cards und USB devices</p> <p>AMI BIOS in 16 MByte EEPROM with SPI interface</p> <p>Supports hardware monitoring and Watchdog function</p> <p>Supports Unified Extensible Firmware Interface (UEFI)</p> <p>Supports Firmware-TPM (fTPM) Version 2.0</p> |

| | |
|--------------------------------------|---|
| POWER ADAPTER | <p>External 65 W power adapter (fanless) Input: 100~240 V AC, 50/60 Hz, max. 1.6 A Output: 19 V DC, max. 3.42 A, max. 65 W DC cable length: ca. 170 cm AC cable length: ca. 170 cm (3-pin Micky MM C6 and Schuko earthed safety plug)</p> |
| DC INPUT CONNECTOR | <p>DC Input Connector: 5.5 / 2.5 mm (outer/inner diameter) The DC-input of the computer supports an external power source with either 12V±5% or 19V±5%.</p> |
| MEMORY SUPPORT | <p>2x SO-DIMM slot with 260 pins Supports DDR4-2666 (PC4-21300) SDRAM at 1.2 V Supports DDR4-3200 at 2666 MHz Supports Dual Channel mode Supports a maximum of 32 GB per DIMM, maximum total size: 64 GB Supports two unbuffered DIMM modules (no ECC or registered)</p> |
| 2.5" DRIVE BAY | <p>2.5" Drive Bay with SATA connector Supports one Serial ATA hard disk or one SATA SSD drive in 6.35 cm / 2.5" format Device height: max. 12.5 mm Supports Serial-ATA III, 6 Gb/s (600 MB/s) bandwidth Supports Unified Extensible Firmware Interface (UEFI) Note: no Serial ATA cable is required.</p> |
| M.2-2280M SLOT FOR SSDs | <p>The M.2 2280 BM slot provides the following interfaces: - PCI-Express Gen. 2.0 X4 - SATA v3.0 (max. 6 Gbps) It supports M.2 cards with a width of 22 mm and a length of 42, 60 or 80 mm (type 2242, 2260, 2280). Supports M.2 SATA SSDs (with B+M key) and M.2 PCIe NVMe SSDs (with M key) Supplied thermal pad for cooling M.2 SSDs.</p> |
| M.2-2230E SLOT FOR WLAN CARDS | <p>Interfaces: PCI-Express Gen. 3.0 X1 und USB 2.0 Supports M.2 cards with a width of 22 mm and a length of 30 mm (type 2230) Supports WLAN expansion cards (optional Shuttle accessory: WLN-M / WLN-M1) 2x pre-installed antenna cables</p> |
| CARD READER | <p>Integrated SD card reader Supports SD, SDHC and SDXC memory flash cards</p> |
| AUDIO | <p>Audio Realtek® ALC897 or ALC662 High-Definition Audio Two analog audio connectors (3.5 mm) at the front panel: 1) 2 channel line out (headphones) 2) microphone input Digital multi-channel audio output: via HDMI and DisplayPort</p> |
| DUAL LAN 2.5G AND 1G | <p>Dual network with two RJ45 ports Used network chips: 1) left: Intel i211 Ethernet Controller supports 2.500 / 1.000 / 100 Mbps operation 2) right: Intel i219 Ethernet Controller supports 1.000 / 100 / 10 Mbps operation Supports WAKE ON LAN (WOL) Supports network boot by Preboot eXecution Environment (PXE)</p> |
| PREPARED FOR WLAN | <p>2x pre-installed antenna cables (WLAN card and antennas not included) Prepared for the installation of an M.2-2242 WLAN card and two external antennas</p> |
| FRONT PANEL CONNECTORS | <p>2x USB 3.2 Gen 2 (red, max. 10 Gbps) 4x USB 2.0 Microphone input Audio Line-out (headphones) SD card reader (supports SD, SDHC, SDXC) Power button Power LED (blue) HDD LED (yellow)</p> |

| | |
|--|---|
| BACK PANEL CONNECTORS | DisplayPort 1.2 [3] HDMI 2.0a D-Sub/VGA 2x USB 3.2 Gen 1 (blue, max. 5 Gbps) 2x Intel RJ45 LAN (left: 2.5 Gbps and right: 1 Gbps) Serial COM port (5V / 12V, switchable to RS232 / RS422 / RS485) [1] DC-input connector for external power adapter 4-pin connector (2.54 mm pitch) for power button, Clear CMOS and 5 V DC [4] |
| ALWAYS-ON JUMPER | By removing Jumper J9 (please refer to the quick user guide), the system will start unconditionally once power is applied. [6] |
| SUPPLIED ACCESSORIES | Multi-language user guide Two metal feet with four screws M3 x 7 mm VESA mount for 75/100mm standard (two metal brackets) Four screws M3 x 7 mm (screws together VESA mount and PC) Four screws M4 x 10 mm (to fix the VESA mount to the external surface) Two screws M3 x 5 mm to mount a 2.5" storage in the bay Two screws M3 x 5 mm to mount M.2 cards Thermal pad for cooling M.2 SSDs Driver DVD for Windows External 65W power adapter with power cord (with protective-earth contacts) |
| OPTIONAL ACCESSORIES | PCP11: adapter cable for the second COM port (replaces the VGA port) CXP01: adapter cable for external power button WWN03: LTE adapter kit for the 2.5" bay including two external LTE antennas [2] WLN-M / WLN-M1: WLAN module (supports WLAN + Bluetooth) with two external antennas and cables PRM01: 2U rack mount front plate for two Shuttle XPC slim DIRO1: mounting kit for 35 mm DIN-Rail |
| ENVIRONMENTAL SPECIFICATIONS | Operating temperature range: 0~40 °C [5] Relative humidity, non-condensing: 10~90 % |
| CONFORMITY & CERTIFICATIONS | EMI: CE, FCC, BSMI, RCM, VCCI Safety: CB, BSMI, cTUVus Other: RoHS, Energy Star, ErP This device is classed as a technical information equipment (ITE) in class B and is intended for use in living room and office. The CE-mark approves the conformity by the EU directives: (1) 2014/30/EU relating to electromagnetic compatibility (EMC) (2) 2014/35/EU relating to Electrical Equipment designed for use within certain voltage limits (LVD) (3) 2009/125/EC relating to eco design requirements for energy-related products (ErP) |

Footnote:

[1] Jumper for COM port configuration

Pin 9 of the COM-Port is a multi-functional signal. Based on the Jumper JP1 configuration on the mainboard, it can be configured as Ring Indicator (RI) or external power supply with a voltage level of either 5 V or 12 V. Each COM port can be configured separately. The operating mode of COM 1 can be set to RS232, RS422 or RS485 in the BIOS. The second COM port (COM 2) supports RS232 mode only, and in the standard SKU of this product it is only available as an onboard connector on the mainboard. An appropriate adapter (e.g. the optional accessory PCP11) is required in order to provide this port as D-Sub connector at the back panel. In this case the VGA port cannot be used.

[2] LTE Adapter Kit WWN03

Using the LTE adapter kit WWN03 means, that the 2.5" bay can no longer be used for SATA drives in 2.5" format (hard disk or SSD). An SSD card in the M.2-2280 format must be used instead.

[3] How to convert DisplayPort into HDMI/DVI

The DisplayPort output can be converted to HDMI or DVI by an additional, passive adapter cable. For example:

DELOCK 82590: 1 m, DisplayPort (male, 20p) to HDMI-A (male, 19p)

DELOCK 82435: 5 m, DisplayPort (male, 20p) to DVI-D (male, 24p)

The integrated graphics automatically detects the connected display and puts out the appropriate electric signal - either through DisplayPort (without an adapter) or HDMI/DVI (with an adapter).

However, a monitor with a DisplayPort connector cannot be connected to the HDMI port with a simple, passive adapter.

[4] Four-pin header at the back panel

This header allows for connecting an external power button.

It also provides 5 V DC voltage for external devices and the Clear CMOS function. Optional accessory: the adapter cable CXP01.

[5] Caution: For ambient temperatures higher than 35 °C we strongly recommend to use an SSD instead of an HDD

[6] Power on after power fail:

The BIOS setup provides a "Power-On after Power Fail" function that can be found under "Power Management Configuration". This function determines the PC's behaviour after power failure. As a matter of the nature of this function, it may fail after short power failures. This is why this product also comes with a hardware-based solution. By removing Jumper J9 (please refer to the quick user guide), the system will start unconditionally once power is applied.